

WEYERHAEUSER ULTRA-POUR™ MDO CONCRETE FORM

SUPERIOR SPECIFICATION FOR OUTSTANDING PERFORMANCE

WEYERHAEUSER ULTRA-POUR™ MEDIUM DENSITY OVERLAY CONCRETE FORM

Weyerhaeuser's Ultra-Pour™ MDO concrete form is a one-sided panel with an APA "B" grade face, and a "C" grade center and back, and a paper overlay. MDO is processed as a one-step lay-up.

- One-step process
- Structural 1, Group 1 Species, PS 1-09 Specification
- Nox-Crete™ release agent
- Highest quality edge seal



WEYERHAEUSER ULTRA-POUR™ MDO CONCRETE FORM

SPECIFICATIONS

One-Step Process

APA "B" grade face
Paper and veneer are pressed together in a one-step process
Minimum grain transfer
Matte finish

Center and Core

Weyerhaeuser's high integrity Ultra-Core® construction features composed cross bands for tight core gap tolerances far more stringent than APA and industry specs
One piece "C" grade center and back

Construction and Thickness

Construction and Thickness	Average Pour Range
Thickness and ply count 5/8" – 6 & 7 ply	Up to 15 Pours* <small>* Pour ranges are not guaranteed, the number of pours will vary based on job site conditions, concrete mix properties, release agent and overall panel handling.</small>
3/4" – 7 ply	
Standard panel size 4' x 8'	
Full Thick and Scant Available	
Oil and edge sealed	

Recommended Maximum Pressures on Structural I Plyform (psf) Face Grain Across Supports

Support Spacing (in.)	Plywood Performance Category							
	1/2		5/8		3/4		1-1/8	
8	980	980	1310	1310	1680	1680	2785	2785
12	410	435	580	580	745	745	1540	1540
16	175	235	270	330	375	420	835	865
19.2	100	135	160	215	230	290	545	600
24	-	-	-	110	120	160	310	385
32	-	-	-	-	-	-	145	190

ABBREVIATED FORM NO. V345V © 2012 APA - ENGINEERED WOOD ASSOCIATION TABLE 5



See the Safety Data Sheet (SDS) for further product information.

CONTACT US

800.548.3099


weyerhaeuser.com/woodproducts

WEYERHAEUSER ULTRA-POUR™ MDO CONCRETE FORM PRODUCTS

• APA CERTIFIED – PS 1-09 STANDARD

5/8" – 50 PC UNIT

3/4" – 44 PC UNIT

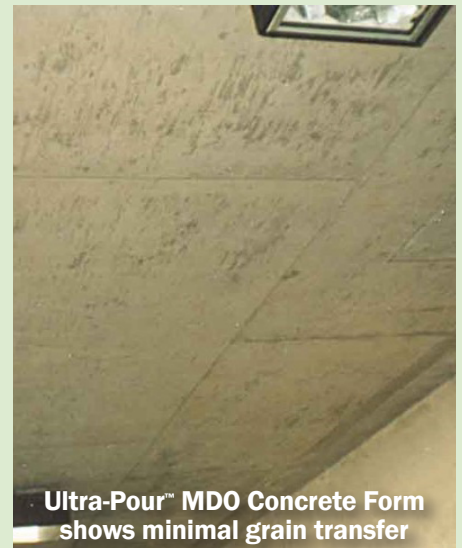

APA structural panels (PS-1) are exempt from the California Air Resources Board regulations, however, this product does not contain Urea Formaldehyde so is considered NAF.

Proudly Distributed By

HARDWOODS[®]

Materials That Inspire

SEARCH

BE INSPIRED



hardwoods-inc.com

designonesource.com

Visit Our Websites

Contact Us

888.826.5528

info@hardwoods-inc.com