

**COMPLETE STEEL &  
FIBERGLASS EXTERIOR  
DOOR OFFERING**

**We are America's doormaker**

VIEW OUR ENTIRE OFFERING AT [TAYLORDOOR.COM](http://TAYLORDOOR.COM)



Our beautiful state is populated with industrious, dedicated and talented people. Passion, hard work and respect – it's the culture of our workplace. Our products are built with pride and confidence, giving you the satisfaction of buying a high-quality, reliable product.

We are **America's** doormaker.

## CONTENTS

<b>4</b>	PROJECT TYPES	<b>36</b>	CUSTOM CAPABILITIES
<b>6</b>	STEEL ENTRANCE DOORS	<b>38</b>	TECHNICAL TOOLS
<b>22</b>	FIBERGLASS ENTRANCE DOORS	<b>40</b>	HURRICANE & WINDLOAD APPROVALS
<b>30</b>	FRAME SYSTEMS	<b>42</b>	ORDERING YOUR DOOR

# THE TAYLOR ADVANTAGE

We are dedicated to providing you with long lasting, quality products, leading-edge product innovation, and exceptional customer service.

## SELECTION

- Wood-edge
- Steel-edge
- Fiberglass
- Available in a variety of textures and styles

## COMPLIANCE


- Fire rated
- Texas Dept. of Insurance (TDI)
- ENERGY STAR
- Florida FBC
- ADA
- STC
- NFRC

## CAPABILITY

- Custom width and heights
- Special face and edge preps
- Slabs or pre-hung
- Steel or wood frame
- Hinge and bore locations to your specs

## AVAILABILITY

- Additional sizes & profiles available (*with extended lead time*)
- No order minimums

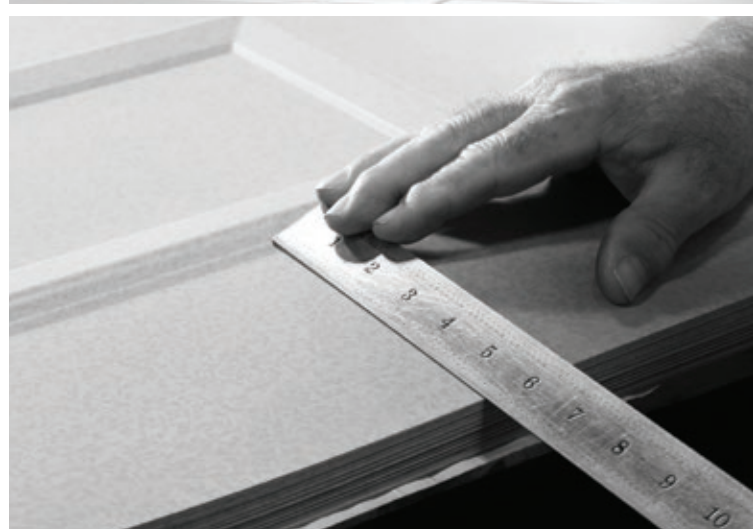

# PROJECT TYPES

At Taylor Entrance Systems™, we use only top-quality materials to help bring your vision to life. We have a wide range of styles and textures to meet your architectural style or design needs. Taylor offers the perfect door solutions for multi-family and light commercial projects. We can provide you what you need, when you need it.

*Shown: Grand Marals  
1-Panel Shaker in Smooth*





## LET TAYLOR ENTRANCE SYSTEMS™ be a part of your next project

- ✓ Residential Living
- ✓ Office Buildings
- ✓ Hotel and Hospitality
- ✓ Multi-family
- ✓ Student Housing
- ✓ Assisted Living
- ✓ Hospitals and Clinics
- ✓ Places of Worship
- ✓ Financial Institutions
- ✓ Warehouses
- ✓ Manufacturing Facilities
- and more...



Shown: Cambridge Smooth Steel  
6-Panel Horizontal in 8/0 height

# STEEL

## DOOR COLLECTIONS



**8**  
CAMBRIDGE  
SMOOTH STEEL



**12**  
WESTGUARD  
20-GAUGE STEEL



**14**  
TRUGRAIN  
PRE-FINISHED STEEL



**16**  
NORWOOD  
STAINABLE STEEL




**18**  
TRUKOTE  
PRE-FINISHED STEEL



**20**  
EDGEWOOD  
WOOD-EDGE STEEL

# BUILT IN ADVANTAGES

Quality entrance systems start with quality components. Our steel door collections are made-to-order and built by talented craftspeople in West Branch, Michigan. We source American-made steel, guaranteeing quality and performance for years to come.

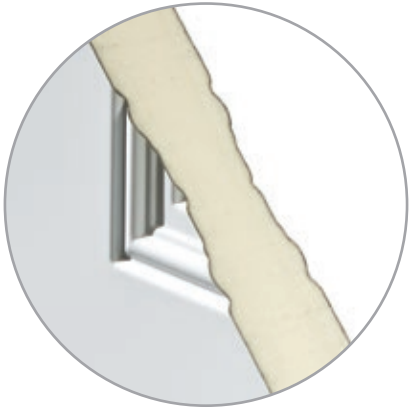

## POLYURETHANE FOAM CORE

Polyurethane foam enhances sound proofing and has insulation properties that are at least four times greater than wood doors. The foam also acts as a bonding agent, locking all internal components in place for enhanced durability.



## FULL STEEL-EDGE PERIMETER

Our steel-edge doors receive the highest rating possible in the industry's toughest forced entry test. A door must withstand the force beyond seven hits from a 100 pound test weight to achieve a Grade 40 rating.



## REINFORCED LOCK BLOCK AREA

Steel doors are constructed with a composite lock block to provide secure mounting of door hardware and better structural integrity. The reinforced lock area offers more screw-holding power than wood.



## ADJUSTABLE HINGE PLATE

This one-of-a-kind hinge plate is built into our slab, allowing the door to be easily adjusted in any direction without removing it from the frame. Adjustments can be made with a screwdriver at any time.

# CAMBRIDGE

## SMOOTH STEEL COLLECTION



Shown: 5-Panel Horizontal


The Cambridge Collection is designed for strength, security and durability. This premium collection resists cracking, splitting, warping, twisting, rotting, and corrosion. Choose from our largest selection of door styles that range from traditional to modern to complement nearly any project type.

- Constructed out of 22- or 24-gauge hot-dip galvanized steel
- Full steel-edge perimeter grants an industry-leading Grade 40 Security Rating
- 20-gauge hinge reinforcements
- Polyurethane foam inner core provides superior insulation
- 90-minute fire rated
- Equipped with the Adjustable Hinge Plate System (*optional*)
- Baked-on polyester primer accepts exterior grade latex paint
- 10" ADA bottom rail available
- Limited Lifetime Warranty on 22-gauge steel, 10-Year Limited Warranty on 24-gauge steel \*
- Available prehung, KD, or slab only (*wood or steel jambs*)



# AVAILABILITY (24-GAUGE STEEL)

FLUSH ★

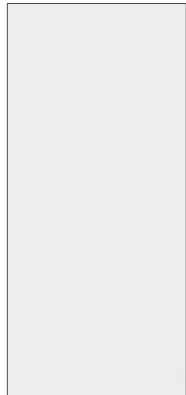

△90 ru

H 6'8" 7'0" 8'0"  
W 2'0" 2'2" 2'4"  
2'6" 2'8" 2'10"  
3'0" 3'2" 3'4" 3'6"

3'2", 3'4", and 3'6" widths not available in 8'0" height

1-PANEL HD



ADA △90 ru

H 6'8" 7'0"  
W 2'8" 2'10" 3'0"

2-PANEL HD ★



ADA △90 ru

H 6'8" 7'0" 8'0"  
W 2'6" 2'8" 2'10"  
3'0"

2'6" width available only with single bore prep at standard location; 2'6" width not available in 8'0" height

2-PANEL HD ARCH TOP ★



ADA △90 ru

H 6'8" 7'0"  
W 2'8" 2'10" 3'0"

2-PANEL HD ARCH TOP PLANK



△90 ru

H 6'8"  
W 2'8" 2'10" 3'0"

2-PANEL HD COTTAGE



△90 ru

H 6'8"  
W 2'8" 2'10" 3'0"

3/4 2-PANEL SQUARE TOP HD



ADA △90 ru

H 6'8" 7'0"  
W 2'8" 2'10" 3'0"

3-PANEL HD ★



△90 ru

H 6'8"  
W 2'8" 2'10" 3'0"

3-PANEL HD CRAFTSMAN



ADA △90 ru

H 6'8" 7'0"  
W 2'8" 2'10" 3'0"

CROSSBUCK



ADA △90 ru

H 6'8" 7'0"  
W 2'6" 2'8" 2'10"  
3'0"

4-PANEL BLANK TOP HD ★



ADA △90 ru nf

H 6'8" 7'0"  
W 2'6" 2'8" 2'10"  
3'0"

TRUE 4-PANEL



ADA △90 ru

H 6'8" 7'0"  
W 2'6" 2'8" 2'10"  
3'0"

2'6" width available only with single bore prep at standard location; 2'6" width not available in 7'0" height

5-PANEL HORIZONTAL



ADA △90 ru

H 6'8" 7'0"  
W 2'8" 2'10" 3'0"

6-PANEL HD\* ★



ADA △90 ru nf

H 6'8" 7'0" 8'0"  
W 2'6" 2'8" 2'10"  
3'0"

\* 8'0" height only available with standard embossment

8-PANEL ★



ADA △90 ru

H 6'8" 7'0"  
W 2'8" 2'10" 3'0"












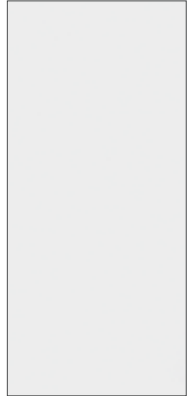







9-PANEL



ADA △90 ru

H 6'8" 7'0"  
W 2'8" 2'10" 3'0"
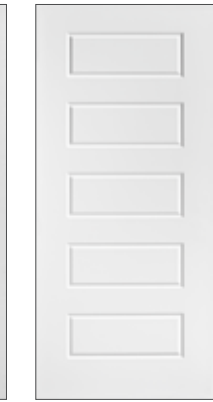
# AVAILABILITY (22-GAUGE STEEL)

<p><b>FLUSH</b> ★</p> 	<p><b>1-PANEL HD</b></p> 	<p><b>1-PANEL FLAT SHAKER</b></p> 	<p><b>2-PANEL HD</b> ★</p> 	<p><b>2-PANEL FLAT SHAKER</b></p> 	<p><b>2-PANEL HD ARCH TOP</b> ★</p> 	<p><b>2-PANEL HD ARCH TOP PLANK</b></p> 
<p>♠90 ru H 6'8" 7'0" 8'0" W 2'0" 2'2" 2'4" 2'6" 2'8" 2'10" 3'0" 3'2" 3'4" 3'6" <small>3'2", 3'4", and 3'6" widths not available in 8'0" height</small></p>	<p>ADA ♠90 ru H 6'8" W 2'8" 2'10" 3'0"</p>	<p>ADA ♠90 ru H 6'8" 7'0" 8'0" W 2'8" 2'10" 3'0"</p>	<p>ADA ♠90 ru H 6'8" 7'0" 8'0" W 2'6" 2'8" 2'10" 3'0" <small>2'6" width available only with single bore prep at standard location; 2'6" width not available in 8'0" height</small></p>	<p>ADA ♠90 ru H 6'8" 7'0" 8'0" W 2'8" 2'10" 3'0"</p>	<p>♠90 ru H 6'8" W 2'8" 2'10" 3'0"</p>	<p>♠90 ru H 6'8" W 2'8" 2'10" 3'0"</p>
<p><b>3/4 2-PANEL SQUARE TOP HD</b></p> 	<p><b>2-PANEL HD COTTAGE</b></p> 	<p><b>3-PANEL HD</b> ★</p> 	<p><b>3-PANEL HD CRAFTSMAN</b></p> 	<p><b>3-PANEL FLAT SHAKER</b></p> 	<p><b>CROSSBUCK</b></p> 	
<p>ADA ♠90 ru H 6'8" 7'0" W 2'8" 2'10" 3'0"</p>	<p>♠90 ru H 6'8" W 2'8" 2'10" 3'0"</p>	<p>ADA ♠90 ru H 6'8" 7'0" W 2'6" 2'8" 2'10" 3'0" <small>2'6" width not available in 7'0" height</small></p>	<p>ADA ♠90 ru H 6'8" 7'0" W 2'8" 2'10" 3'0"</p>	<p>ADA ♠90 ru H 6'8" 7'0" W 2'8" 2'10" 3'0"</p>	<p>ADA ♠90 ru H 6'8" 7'0" W 2'6" 2'8" 2'10" 3'0"</p>	
<p><b>4-PANEL BLANK TOP HD</b> ★</p> 	<p><b>TRUE 4-PANEL</b> ★</p> 	<p><b>5-PANEL HORIZONTAL</b></p> 	<p><b>6-PANEL HD</b> ★</p> 	<p><b>8-PANEL</b> ★</p> 	<p><b>9-PANEL</b></p> 	
<p>ADA ♠90 ru nf H 6'8" 7'0" W 2'6" 2'8" 2'10" 3'0" <small>7'0" height only available in 2'6" width</small></p>	<p>ADA ♠90 ru H 6'8" 7'0" W 2'6" 2'8" 2'10" 3'0" <small>2'6" width available only with single bore prep at standard location</small></p>	<p>ADA ♠90 ru H 6'8" 7'0" 8'0" W 2'8" 2'10" 3'0" <small>8'0" height has a 6-panel embossment</small></p>	<p>ADA ♠90 ru nf H 6'8" 7'0" W 2'6" 2'8" 2'10" 3'0" 3'4" 3'6" <small>3'4" and 3'6" widths not available in 7'0" height</small></p>	<p>ADA ♠90 ru H 6'8" 7'0" W 2'8" 2'10" 3'0"</p>	<p>ADA ♠90 ru H 6'8" 7'0" W 2'8" 2'10" 3'0"</p>	



# EXPLORE

## NEW HEIGHTS

### 8' DOOR STYLES

The Cambridge Smooth Steel Collection offers a variety of door styles designed to complement nearly any architectural style.

Today's trends are demanding larger than life openings with understated details. The simple and clean design of the 1-Panel and 2-Panel Flat Shaker styles make them the perfect, modern solution for large openings.

Shown: 1-Panel Flat Shaker in 8/0 height

**FLUSH**



△90 ru  
 H 8'0"  
 W 2'0" 2'2" 2'4"  
 2'6" 2'8" 2'10"  
 3'0"

**1-PANEL FLAT SHAKER**



△90  
 H 8'0"  
 W 2'8" 2'10" 3'0"

**2-PANEL FLAT SHAKER**



△90  
 H 8'0"  
 W 2'8" 2'10" 3'0"

**2-PANEL HD**



△90  
 H 8'0"  
 W 2'8" 2'10" 3'0"

**6-PANEL HORIZONTAL**



△90  
 H 8'0"  
 W 2'8" 2'10" 3'0"

**6-PANEL STD**



△90  
 H 8'0"  
 W 2'6" 2'8" 2'10"  
 3'0"

Availability is subject to change.

# WESTGUARD

20-GAUGE SMOOTH  
STEEL COLLECTION



Shown: 2-Panel Flat Shaker in  
8/0 height with glass lite cut out

Built for superior performance, the WestGuard Collection withstands regular wear and tear with its 20-gauge, hot-dip galvanized steel construction, making it the perfect door for commercial and high-traffic applications. Customize to fit your spec, including sized to fit hollow metal frames and prepped to accept virtually any locking hardware.

- Constructed out of 20-gauge, hot-dip galvanized steel that resists corrosion
- Full steel-edge perimeter grants an industry-leading Grade 40 Security Rating
- 20-gauge hinge reinforcements
- Polyurethane foam inner core provides superior insulation
- 90-minute fire rated
- Equipped with the Adjustable Hinge Plate System (*optional*)
- Baked-on polyester primer accepts exterior grade latex paint
- 10" ADA bottom rail available
- Limited Lifetime Warranty \*
- Available prehung, KD, or slab only (*wood or steel jambs*)

# AVAILABILITY (20-GAUGE STEEL)

**FLUSH** ★



ADA ♠90  
 H 6'8" 7'0" 8'0"  
 W 2'0" 2'4" 2'6" 2'8"  
 2'10" 3'0" 3'2" 3'4"  
 3'6" 4'0"

**2-PANEL HD**



ADA ♠90  
 H 6'8" 7'0" 8'0"  
 W 2'8" 2'10" 3'0"

**2-PANEL HD ARCH TOP** ★



♠90  
 H 6'8"  
 W 2'8" 2'10" 3'0"

**4-PANEL BLANK TOP** ★



ADA ♠90  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**TRUE 4-PANEL** ★



ADA ♠90  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**6-PANEL HD**



ADA ♠90  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**1-PANEL FLAT SHAKER**



ADA ♠90  
 H 6'8" 7'0" 8'0"  
 W 2'8" 2'10" 3'0"

**2-PANEL FLAT SHAKER**




ADA ♠90  
 H 6'8" 7'0" 8'0"  
 W 2'8" 2'10" 3'0"

**3-PANEL FLAT SHAKER**



ADA ♠90  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**5-PANEL**

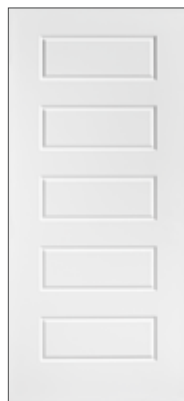


ADA ♠90  
 H 6'8" 7'0" 8'0"  
 W 2'8" 2'10" 3'0"

*8'0" height has a 6-panel embossment*

## OPEN WIDER

Add the security of a 20-gauge steel door with the convenience of a wide door. The 4/0 wide door option is available in 6/8, 7/0, and 8/0 heights.

These doors are ideal for garage service entrances, agricultural buildings, and commercial openings.

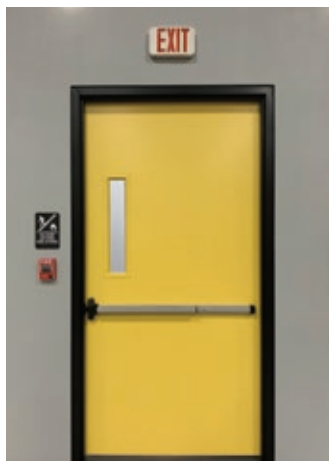

# TRUGRAIN™

## PRE-FINISHED STEEL COLLECTION



Shown: 2-Panel Shaker in Brimley

Combine the look of wood with the strength of steel. The Trugrain™ Collection is pre-finished with a 3-step, high-quality polyester paint system that includes a color base coat, woodgrain ink pattern, and a durable, scratch-resistant topcoat. This collection is ideal for commercial and multi-family use with ADA embossment availability.

- Scratch-resistant top coat
- No finishing or maintenance required
- Constructed out of 22-gauge hot-dip galvanized steel that resists corrosion
- Full steel-edge perimeter grants an industry-leading Grade 40 Security Rating
- 20-gauge hinge reinforcements
- 90-minute fire rated
- Polyurethane foam inner core provides superior insulation
- Equipped with the Adjustable Hinge Plate System (*optional*)
- 10" ADA bottom rail available
- 10-Year Limited Warranty \*
- Available prehung, KD, or slab only (*wood or steel jambs*)

# AVAILABILITY (22-GAUGE STEEL)

All embossments are available in Holland, Rockport, Ludington, and Brimley finish.

**FLUSH** ★



ADA ♠90  
 H 6'8" 7'0" 8'0"  
 W 2'8" 2'10" 3'0"

**1-PANEL  
 FLAT SHAKER**



ADA ♠90  
 H 6'8" 7'0" 8'0"  
 W 2'8" 2'10" 3'0"

**2-PANEL  
 FLAT SHAKER**



ADA ♠90  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"



Close up detail of the 2-Panel HD embossment in Rockport

**3-PANEL  
 FLAT SHAKER**



ADA ♠90  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**2-PANEL HD** ★




ADA ♠90  
 H 6'8" 7'0" 8'0"  
 W 2'8" 2'10" 3'0"

**6-PANEL HD\*** ★



ADA ♠90  
 H 6'8" 7'0" 8'0"  
 W 2'8" 2'10" 3'0"

\* 8'0" height only available with standard embossment

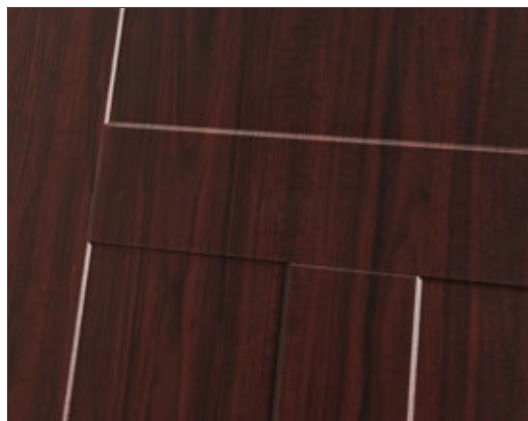


Close up detail of the 3-Panel Flat Shaker embossment in Ludington

## 4 UNIQUE FINISH OPTIONS

Colors shown are as accurate as printing technologies allow.




**HOLLAND**  
 (Oak Grain)



**BRIMLEY**  
 (Walnut Grain)



**ROCKPORT**  
 (Mahogany Grain)



**LUDINGTON**  
 (Cherry Grain)

# NORWOOD

## STAINABLE STEEL COLLECTION



Shown: 1-Panel Flat Shaker


Stainable steel entrance doors mimic the warmth and beauty of wood with the features and benefits of steel. These steel doors have a deeply embossed Oak wood grain surface. A special beige primer is applied that permanently bonds to the steel and accepts stain. Applying stain enhances the texture of the steel for an authentic woodgrain appearance.

- Constructed out of 22-gauge hot-dip galvanized steel that resists corrosion
- Full steel-edge perimeter grants an industry-leading Grade 40 Security Rating
- 20-gauge hinge reinforcements
- Polyurethane foam inner core provides superior insulation
- 90-minute fire rated
- Equipped with the Adjustable Hinge Plate System (*optional*)
- Special beige primer allows for staining (*stained finish is shown*)
- 10" ADA bottom rail available
- Limited Lifetime Warranty \*
- Available prehung, KD, or slab only (*wood or steel jambs*)




# AVAILABILITY (22-GAUGE STEEL)

**FLUSH** ★

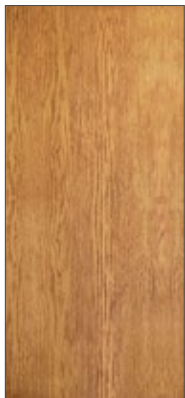


ADA ♡90 ru  
 H 6'8" 7'0" 8'0"  
 W 2'0" 2'2" 2'4" 2'6"  
 2'8" 2'10" 3'0"

**1-PANEL HD**

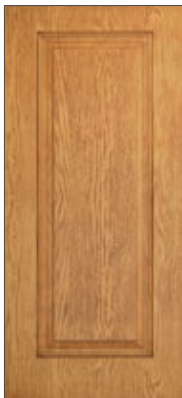

ADA ♡90 ru  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**1-PANEL FLAT SHAKER**

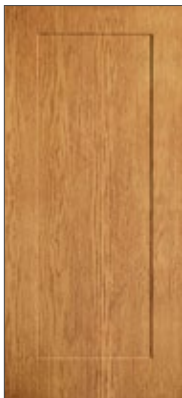


ADA ♡90 ru  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**2-PANEL HD** ★




ADA ♡90 ru  
 H 6'8" 7'0" 8'0"  
 W 2'8" 2'10" 3'0"

**2-PANEL FLAT SHAKER**

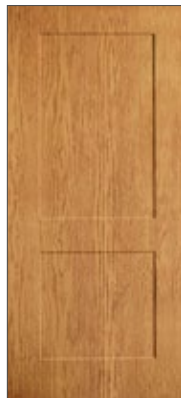

ADA ♡90 ru  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**2-PANEL HD ARCH TOP** ★

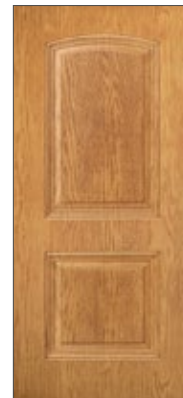

ADA ♡90 ru  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**2-PANEL HD ARCH TOP PLANK**



ADA ♡90 ru  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**2-PANEL HD COTTAGE**



ADA ♡90 ru  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**3-PANEL HD** ★



ADA ♡90 ru  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**3-PANEL HD CRAFTSMAN**



ADA ♡90 ru  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**3-PANEL FLAT SHAKER**



ADA ♡90 ru  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**CROSSBUCK**



ADA ♡90 ru  
 H 6'8"  
 W 2'6" 2'8" 2'10"  
 3'0"

**4-PANEL BLANK TOP** ★



ADA ♡90 ru nf #  
 H 6'8" 7'0"  
 W 2'6" 2'8" 2'10"  
 3'0"

**TRUE 4-PANEL** ★



ADA ♡90 ru  
 H 6'8" 7'0"  
 W 2'6" 2'8" 2'10"  
 3'0"

2'6" width available only with single bore prep at standard location

**6-PANEL** ★



ADA ♡90 ru nf #  
 H 6'8" 7'0" 8'0"  
 W 2'6" 2'8" 2'10"  
 3'0"

**8-PANEL** ★



ADA ♡90 ru  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**9-PANEL**



ADA ♡90 ru #  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"



# TRUKOTE

PRE-FINISHED STEEL COLLECTION


The Trukote Collection is pre-finished with a white polyester paint that requires no additional finishing. This collection is ideal for projects that require a ready-to-install option or that are looking to achieve a clean, classic aesthetic.

- Made from 24-gauge hot-dip galvanized steel that resists corrosion
- Full steel-edge perimeter grants an industry-leading Grade 40 Security Rating
- 20-gauge hinge reinforcements
- Polyurethane foam inner core provides superior insulation
- 90-minute fire rated
- Equipped with the Adjustable Hinge Plate System (*optional*)
- No finishing or maintenance required
- 10-Year Limited Lifetime Warranty \*
- Available prehung, KD, or slab only (*wood or steel jambs*)

\* Refer to [taylordoor.com](http://taylordoor.com) for commercial application warranty.

# AVAILABILITY (24-GAUGE STEEL)

**FLUSH**

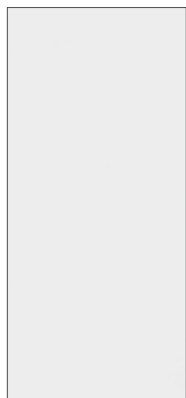

★90  
 H 6'8" 7'0" 8'0"  
 W 2'0" 2'2" 2'4"  
 2'6" 2'8" 2'10"  
 3'0"

**1-PANEL HD**



**ADA** ★90  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**2-PANEL HD**



**ADA** ★90  
 H 6'8" 7'0" 8'0"  
 W 2'8" 2'10" 3'0"

**2-PANEL HD ARCH TOP**



★90  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**2-PANEL HD ARCH TOP PLANK**



★90  
 H 6'8"  
 W 2'8" 2'10" 3'0"

**2-PANEL HD COTTAGE**




**ADA** ★90  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**3-PANEL HD CRAFTSMAN**



**ADA** ★90  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**CROSSBUCK**

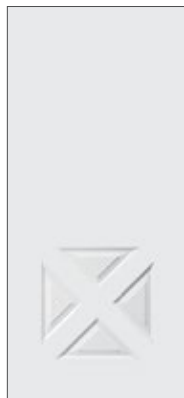

★90  
 H 6'8"  
 W 2'8" 2'10" 3'0"

**TRUE 4-PANEL**



**ADA** ★90  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**6-PANEL HD**



**ADA** ★90  
 H 6'8" 7'0"  
 W 2'8" 2'10" 3'0"

**6-PANEL STD**



★90  
 H 8'0"  
 W 2'8" 2'10" 3'0"



Shown: 6-Panel HD with glass lite cut out

# EDGEWOOD®

## WOOD-EDGE STEEL COLLECTION



Shown: 2-Panel HD with glass lite cut out

Edgewood® is a steel entrance door system that features a wood stile and rail system, along with a composite bottom rail that guards against both rot and insects. This collection is constructed out of 25-gauge steel with a 10° face sheet bend and a white primer finish.

- Constructed out of 25-gauge hot-dip galvanized steel that resists corrosion
- Polyurethane foam inner core provides superior insulation
- 20-minute fire rated
- White primer finish on both sides
- 1-1/4" solid wood stile and rail system, along with a composite bottom rail that guards against both rot and insects
- Available prehung, KD, or slab only (wood or steel jambs)
- 2-Year Limited Lifetime Warranty

# AVAILABILITY (25-GAUGE STEEL)

**2-PANEL HD** ★



**ADA ♡20**  
 H 6'8"  
 W 2'8" 2'10" 3'0"

**3-PANEL HD** ★



**♡20**  
 H 6'8"  
 W 2'8" 2'10" 3'0"

**4-PANEL BLANK TOP HD** ★



**ADA ♡20 nf**  
 H 6'8"  
 W 2'6" 2'8" 2'10" 3'0"

**TRUE 4-PANEL** ★



**ADA ♡20**  
 H 6'8"  
 W 2'8" 2'10" 3'0"


2'6" width available only with single bore prep at standard location

**6-PANEL HD** ★




**ADA ♡20 nf**  
 H 6'8"  
 W 2'6" 2'8" 2'10" 3'0"

**FLUSH** ★

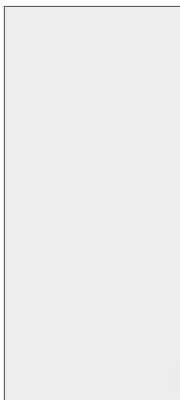

**♡20**  
 H 6'8"  
 W 2'0" 2'4" 2'6" 2'8" 2'10" 3'0"

**FLUSH**

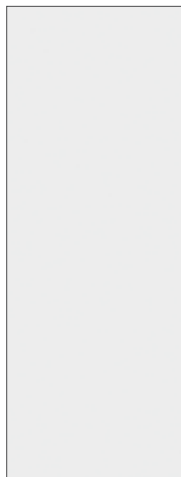


**♡20**  
 H 8'0"  
 W 2'8" 3'0"



1-1/4" solid wood stiles



Composite bottom rail



**24**  
GRAND MARAIS



**26**  
TIMBERGRAIN

*Shown: Timbergrain Fir 1-Panel Shaker with 3.5" wide Simulated Divided Lite Bars*

# FIBERGLASS

## DOOR COLLECTIONS

# BUILT IN ADVANTAGES

Fiberglass entrance doors are the perfect complement to nearly any project that desires the warmth and comfort of wood. They add depth and dimension while also being low maintenance and energy efficient. Our fiberglass door collections are engineered for durability and longevity and are available in various textures.




## DURABLE CONSTRUCTION

Our fiberglass door collections are made from high-impact, compression molded skins designed not to crack, splinter, warp, rot, or delaminate. They also feature composite top and bottom rails that protect against water infiltration.



## WARMTH OF WOOD

Fiberglass skins are compression molded with high quality, debossed wood grain patterns, and architecturally correct rails and stiles. The skins easily accept paint or stain and replicate the appearance of real wood doors.

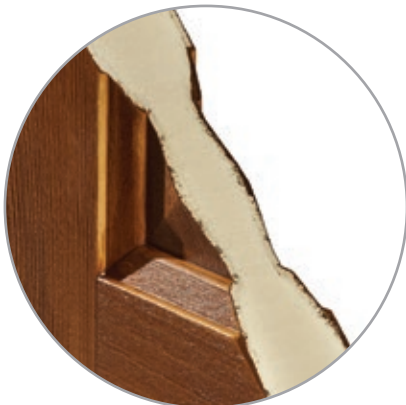

## POLYURETHANE FOAM CORE

Fully insulated with an inner core of polyurethane foam that acts as a bonding agent and provides superior insulation. Polyurethane foam enhances soundproofing and has insulation properties that are at least four times greater than wood doors.



## ADJUSTABLE HINGE PLATE\*

This one-of-a-kind plate is built into the slab, allowing the door to be easily adjusted without removing it from the frame. Adjustments can be made with a screwdriver at any time.

\*Unavailable on Grand Marais Fiberglass Collection

# GRAND MARAIS

## FIBERGLASS COLLECTION



Shown: 5-Panel Shaker in Fir Grain texture


The Grand Marais Fiberglass Collection is designed with energy and thermal performance in mind, while also providing depth and dimension to any entryway. This collection is available in three finishes: Oak Grain, Fir Grain, or White Smooth.

- Unaffected by moisture and humidity
- Full-length composite stiles and rails with HydroShield provide a 6-sided protection against water infiltration, mold, and insects
- Made from high-impact fiberglass reinforced skins
- Surface easily accepts paint and stain, while also being easy to clean
- Polyurethane foam inner core provides superior insulation
- 20-minute fire rated (*select door styles*)
- 25-year limited warranty on Timberline Smooth, limited lifetime warranty on Timberline Textured
- Available prehung, KD, or slab only (*wood or steel jambs*)


### AVAILABLE TEXTURES:



OAK GRAIN

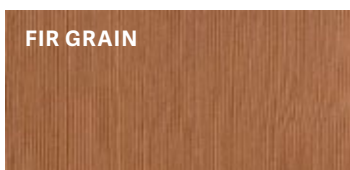

FIR GRAIN



WHITE SMOOTH



# AVAILABILITY

FIR GRAIN

**1-PANEL SHAKER**



🔨20 3'0" x 6'8" only  
 H 6'8"  
 W 2'8" 2'10" 3'0"

**2-PANEL SHAKER**



🔨20 3'0" x 6'8" only  
 H 6'8"  
 W 2'8" 3'0"

**3-PANEL SHAKER** ★



🔨20 3'0" x 6'8" only  
 H 6'8" 8'0"  
 W 2'8" 3'0"

**5-PANEL SHAKER**



H 6'8"  
 W 2'8" 3'0"

**DIRECT GLAZED ONE LITE**



**ADA**  
 H 6'8" 8'0"  
 W 3'0"

SMOOTH

**1-PANEL SHAKER**



H 6'8"  
 W 2'8" 2'10" 3'0"

**2-PANEL SHAKER**



🔨20 3'0" x 6'8" only  
 H 6'8"  
 W 2'8" 3'0"

**2-PANEL** ★



**ADA** 🔨20  
 H 6'8" 7'0" 8'0"  
 W 3'0"

**3-PANEL SHAKER** ★



🔨20 3'0" x 6'8" only  
 H 6'8" 8'0"  
 W 2'8" 3'0"

*2'8" width not available in 8'0" height*

**5-PANEL SHAKER**



🔨20  
 H 6'8"  
 W 2'8" 3'0"

**DIRECT GLAZED ONE LITE**



**ADA**  
 H 6'8" 8'0"  
 W 3'0"

SMOOTH & OAK GRAIN


**FLUSH OAK GRAIN** ★



🔨20 3'0" x 6'8" only  
 H 6'8" 8'0"  
 W 2'6" 2'8" 3'0"

*2'6" width not available in 8'0" height*

**FLUSH SMOOTH** ★

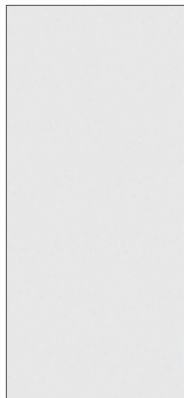

🔨20 3'0" x 6'8" only  
 H 6'8" 7'0" 8'0"  
 W 2'6" 2'8" 3'0"

*7'0" height only available in 3'0" width*

**3/4 4-PANEL SMOOTH & OAK GRAIN** ★



H 6'8"  
 W 3'0"

**4-PANEL**

**BLANK TOP SMOOTH & OAK GRAIN** ★



H 6'8"  
 W 2'8" 3'0"

**6-PANEL OAK GRAIN**



🔨20 3'0" width only  
 H 6'8"  
 W 2'8" 3'0"

**6-PANEL SMOOTH**



🔨20 3'0" width only  
 H 6'8" 7'0" 8'0"  
 W 2'8" 3'0"

*2'8" width only available in 6'8" height*

Availability is subject to change. ★ = matching sidelite available

# TIMBERGRAIN





## FIBERGLASS COLLECTION

Shown: 2-Panel Arch Top  
in Cherry Grain texture

Timbergrain fiberglass entrance doors are constructed of high resolution, grained, fiberglass skins. They offer the warmth of wood and its natural variation of grain characteristics in Cherry, Mahogany, Fir, Oak, and Knotty Alder.

- 4" full-length engineered hinge and lock stiles
- Square 1/2" hardwood capped edges are rot-resistant
- 1" composite top and bottom rail protects against water infiltration, mold, and insects
- Equipped with the Adjustable Hinge Plate System (*optional*)
- Polyurethane foam inner core provides superior insulation
- 1/10" thick high-impact molded fiberglass reinforced skins
- Limited Lifetime Warranty
- Available prehung, KD, or slab only (*wood or steel jambs*)


### AVAILABLE TEXTURES:



# AVAILABILITY

## FLUSH

Cherry

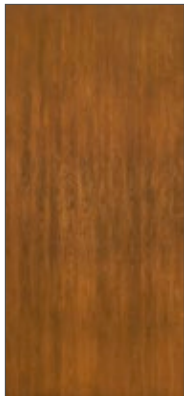

H 6'8" 7'0" 8'0"  
W 2'6" 2'8" 2'10"  
3'0" 3'6"

## 3/4 2-PANEL ARCH TOP


Cherry



H 6'8" 7'0" 8'0"  
W 2'8" 2'10" 3'0"

## 3/4 2-PANEL ARCH TOP PLANK

Cherry

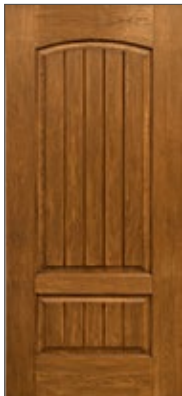

H 6'8" 7'0" 8'0"  
W 2'8" 2'10" 3'0"

## 2-PANEL SQUARE TOP

Cherry



H 8'0"  
W 3'6"

## 2-PANEL SQUARE TOP NARROW PLANK

Cherry



H 8'0"  
W 3'6"

## 2-PANEL SQUARE TOP WIDE PLANK

Cherry



H 8'0"  
W 3'6"

## 3/4 2-PANEL SQUARE TOP

Cherry, Oak



H 6'8" 7'0" 8'0"  
W 2'8" 2'10" 3'0"

## 3/4 2-PANEL SQUARE TOP PLANK

Cherry, Oak



H 6'8" 7'0"  
W 2'8" 2'10" 3'0"

## 8-PANEL CENTER ARCH

Cherry, Oak



H 6'8" 7'0"  
W 2'10" 3'0"

## 3-PANEL


Cherry, Mahogany, Oak



H 6'8" 7'0"  
W 2'8" 2'10" 3'0"

## 6-PANEL

Cherry, Mahogany, Oak

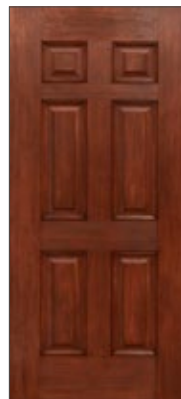

H 6'8" 7'0"  
W 2'8" 2'10" 3'0"

## 2-PANEL ARCH TOP

Knotty Alder



H 6'8" 7'0" 8'0"  
W 2'8" 2'10" 3'0"

## 2-PANEL ARCH TOP PLANK

Knotty Alder



H 6'8" 7'0" 8'0"  
W 2'8" 2'10" 3'0"

## 1-PANEL SHAKER

Fir



H 6'8" 7'0" 8'0"  
W 2'10" 3'0"

## 3-PANEL SHAKER

Fir



H 6'8" 7'0" 8'0"  
W 2'10" 3'0"

# TIMBERGRAIN ACCESSORIES

The Timbergrain Fiberglass Collection offers a variety of accessories that perfectly match each grain texture. Complete any Timbergrain door with matching glass lite frames or simulated divided lites for a refined look.



Shown: 3/4 2-Panel Square in Cherry texture with simulated divided lite bars

## CHERRY, OAK, MAHOGANY, AND KNOTTY ALDER GRAIN:



Glass Lite Frames



Simulated Divided Lite Bars


## FIR GRAIN:



Glass Lite Frames  
*(flush fit)*



Dentil Shelf  
*(molded with glass frame)*

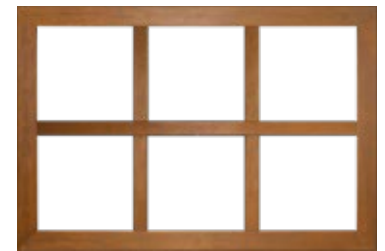

Simulated Divided Lite Bars



3.5"



5.25"

Mix & Match Wide Simulated Divided Lite Bars  
*(available in 3.5" or 5.25" wide by 96" long)*

*Shown: 3-Panel Craftsman in Fir texture with  
dentil shelf and simulated divided lite bars*



# TIMBERGRAIN

FIBERGLASS ACCESSORIES

# DISCOVER THE DIFFERENCE



*Shown: WestGuard Smooth Steel  
2-Panel HD with glass lite cut out*

# COMPLETE THE SYSTEM

No matter what the project, create a ready-to-install system with our steel-edge doors. Available with a variety of hardware preps, components, and frame systems.



**33**

QUIKFIT FITTED FRAME SYSTEM



**34**

REMODELER SERIES FRAME SYSTEM




**36**

CAPABILITIES & PREPS

# QUIKFIT

## FITTED FRAME SYSTEM

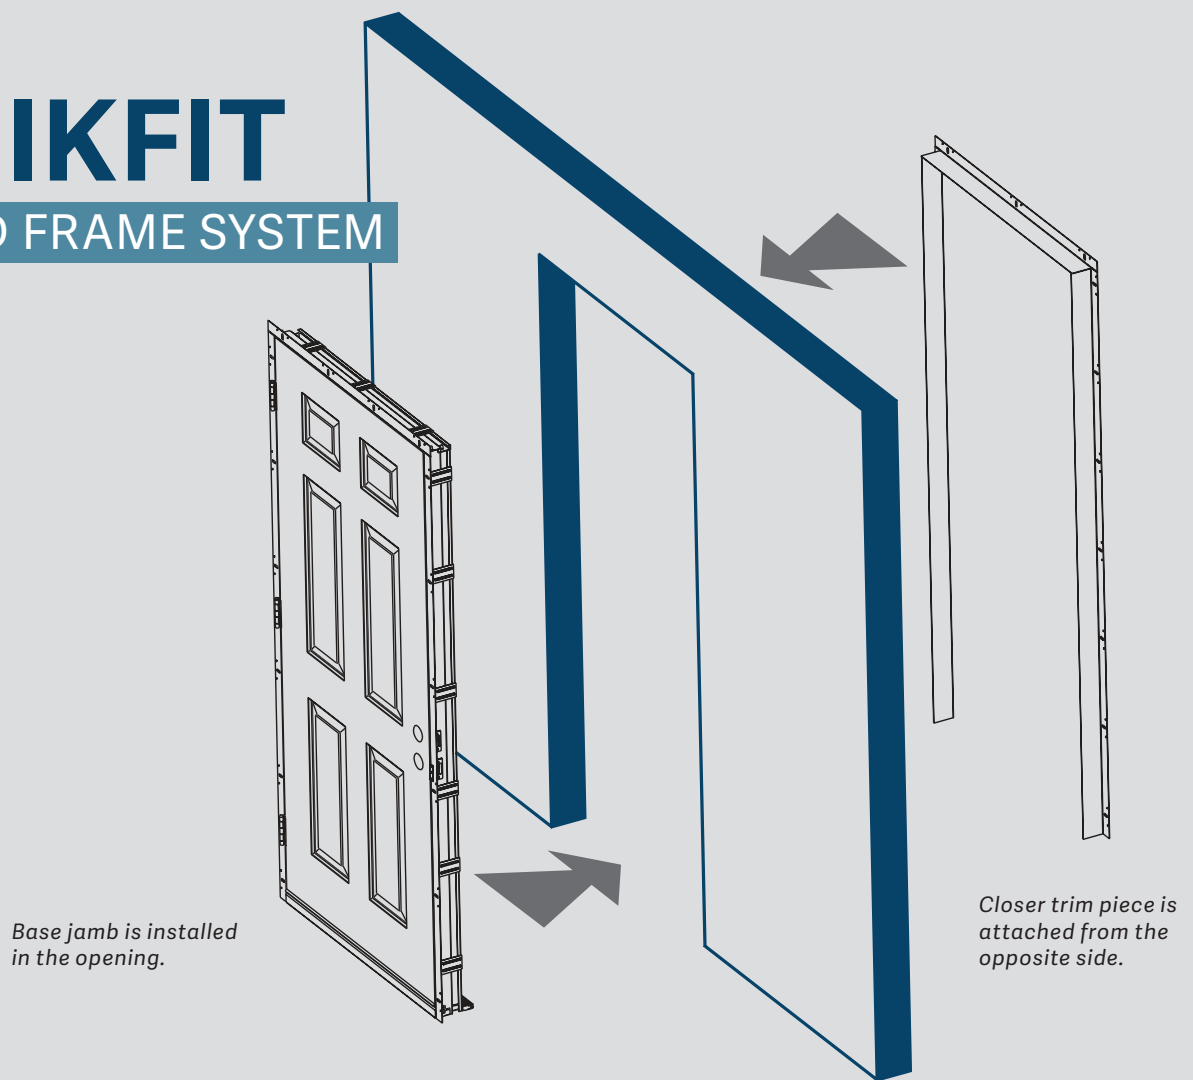

The QuikFit Door Frame System is an entrance system that features a steel-edge door panel prehung into an adjustable steel frame. This system is easy to install and offers the industry's highest fire and security ratings, making it ideal for a variety of project types.

- Ideal for multi-family and light commercial applications
- Two-piece adjustable steel frame for ease of installation
- Design Pressure (DP) ratings of +/- 60 up to 3670
- Florida Building Code (FBC) and Texas Department of Insurance (TDI) approved
- Available in 6/8, 7/0, and 8/0 heights
- Fire rated 20 or 90 minutes
- 4-1/2" to 12-1/2" wall construction (1" adjustment) for 1-3/4" door
- Thermally broken sills: Inswing, Outswing, and ADA compliant
- 1-year warranty






## STEEL-EDGE DOOR PANEL

- Prehang any of our steel-edge door panels for a complete 90-minute fire rated door system
- Full steel-edge perimeter provides additional strength and a Grade 40 security rating
- 20+ embossments available in varying heights, widths, and 10" ADA rail
- View our entire offering at [taylordoor.com](http://taylordoor.com)

## FRAME COLOR AVAILABILITY



WHITE



BROWN

*Non-stock, extended lead time*



SATIN BLACK

*Non-stock, extended lead time*

## AVAILABLE COMPONENTS & PREPS

- Colonial and Standard steel casing
- Four standard hinge preps
- Variety of hinge types & finishes
- Closer & panic reinforcements
- Peep site prep
- Multiple lock prep & bore options
- Retainer & Slide-on sweeps

1-PANEL  
FLAT SHAKER



2-PANEL HD



3/4 2-PANEL  
SQUARE TOP HD



3-PANEL  
FLAT SHAKER



5-PANEL



6-PANEL HD



**90 MIN**  
**FIRE RATED**



Colonial



Standard

# PROFESSIONAL REMODELER FRAME SYSTEM

Bring back new life and energy efficiency to existing openings with our Professional Remodeler Frame System! This system is specially designed to fit over existing wood frames and allows for effortless installation of replacement units. Available to order with a pre-hung steel door for superior durability, efficiency, and security.

- Constructed of 18-gauge galvanized steel for superior corrosion resistance
- Designed to fit over existing wood frames
- Available in:  
2/5, 2/7, 2/9, or 2/11 width  
6/5, 6/7, 6/9 or 6/11 height
- Frame assembly up to 6/11 height
- 11-gauge hinge reinforcements spot welded for maximum strength
- Prepped with anchoring holes and slots for wood trim
- Special white powder-coated finish requires no sanding or re-coating
- Surpasses the most stringent forced entrance security test
- Weatherstrip and an adjustable threshold provide an energy-saving advantage

## EASY INSTALLATION



**1** Carefully remove and save interior trim



**2** Remove the old door, strike plates, hinges and threshold



**3** Insert the replacement unit into the opening from the interior side



**4** Nail replacement unit into position




**5** Install door hardware



**6** Install weatherstripped wood stops and replace interior trim

# REMODELER UNDER-SIZE DOOR AVAILABILITY

The Professional Remodeler Frame System can be used with any of our remodeler under-size door styles. Choose from either a smooth or stainable steel door in up to 14 different styles. *Availability varies based off of steel thickness and hinge type.*

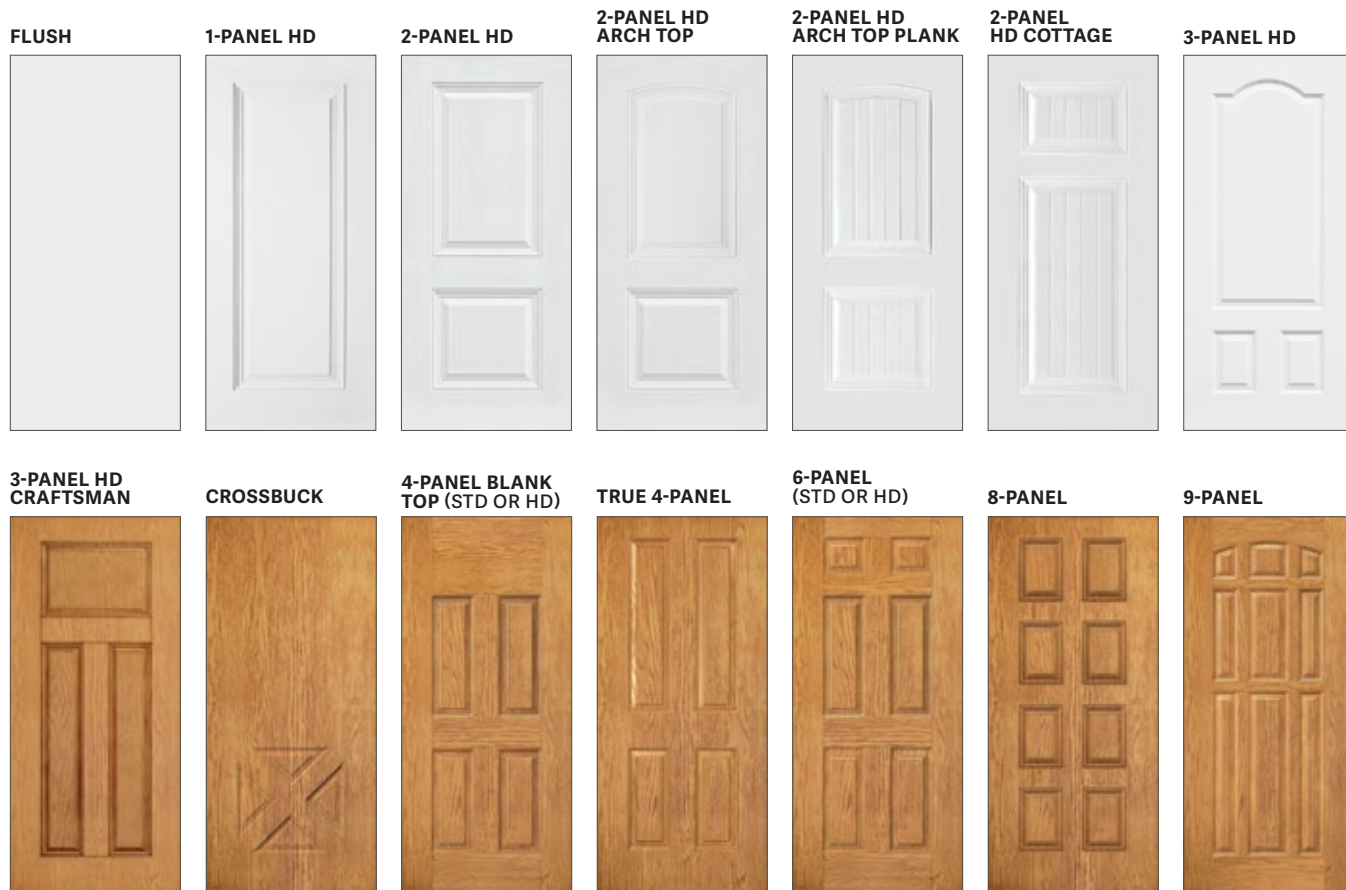

# CUSTOM CAPABILITIES

At Taylor, we don't just build doors, we customize them. Our steel and fiberglass exterior doors are customized to fit your spec, including sized to fit hollow metal frames and prepped to accept virtually any locking hardware. Choose Taylor's custom door solutions for your next multi-family or commercial project.



## CUSTOM HARDWARE PREP

Taylor's one-of-a-kind, state-of-the-art equipment has the capability to do virtually any lock, face bore, or edge prep that a commercial or residential job may require. Give us the template, we'll make the door.

- Custom face and edge preps on fiberglass, steel- and wood-edge steel doors
- Special lock preps
- Custom bore locations to your specs
- Closer and panic bar prep



## HINGE PREP

Does your project require custom hinge locations? Taylor offers a variety of hinge preps to fit your project specs.



STANDARD 4" NON-  
TEMPLATE HINGE PREP



STANDARD 4" ADJUSTABLE  
NON-TEMPLATE HINGE PREP



4" TEMPLATE  
HINGE PREP



4-1/2" COMMERCIAL  
TEMPLATE HINGE PREP


## DOORS BUILT TO SPEC

At Taylor, we build entry doors one at a time, to any spec. These custom capabilities are available within the standard lead time.


- Specs to match competitive brands
- Specs to match hollow metal frames: Amweld, Republic, Ceco, Curries, Mesker, and more.
- Specs to match light gauge metal frames: IDP, Timely, RediFrame, and more.
- Special heights & widths




## ADA SILLS




5" ADA Saddle  
fits 4.5" - 5.5" wall thickness



6" ADA Saddle  
fits 5.5" - 6.5" wall thickness



7" ADA Saddle  
fits 6.5" - 7.5" wall thickness



8" ADA Saddle  
fits 7.5" - 8.5" wall thickness

## CLOSER & PANIC BAR PREPS



CLOSER BLOCK



PANIC PREP & CLOSER PLATES



HEAD & FOOT BOLT



MULTI-PURPOSE PREP

## SPECIAL HEIGHT & WIDTH

### STEEL-EDGE DOOR HEIGHT & WIDTHS

Up to 7/0 height, any width between 23.75" and 41.75"

Over 7/0 height, any width between 23.75" and 35.75"

Minimum height is 76"

Maximum height is 95.25"

## HANDING

To hand a door, Face it from the outside or key side

**Left Hand Inswing**  
Hinges on left  
Opens inward



**Right Hand Inswing**  
Hinges on right  
Opens inward



**Left Hand Reverse**  
Hinges on left  
Opens outward



**Right Hand Reverse**  
Hinges on right  
Opens outward



# TECHNICAL INFORMATION

We strive to build doors that work for every need and application. Whether you're looking for a fire-rated door, ADA-compliant features, or a door that is Texas Department of Insurance (TDI) approved, we have something for your project.




## ARCAT®

Download high quality design files and product specs from ARCAT.com for our fiberglass and steel entrance door systems.

- CAD drawings
- Revit & SketchUp BIM files
- LEED data
- Product specs



ARCAT

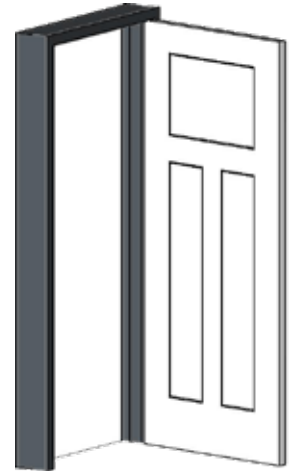

## TAYLORDOOR.COM

Visit our website's Technical Library for tools to help you specify exterior doors for your next project.

- Fire ratings
- Product details
- STC and OITC ratings
- Impact & Design Pressure information
- Installation Guides



Technical Library



Literature

## SOUND TRANSMISSION CLASS (STC) RATING

Product	STC Rating
WestGuard 20-Gauge Steel Door	21
WestGuard 20-Gauge Steel Door with 1" I.G. Full Lite	28
22-Gauge Steel-Edge Door	25
22-Gauge Steel-Edge Door with 1" I.G. Full Lite	28
24-Gauge Steel-Edge Door	22
24-Gauge Steel-Edge Door with 1" I.G. Full Lite	25
Edgewood® 25-Gauge Wood-Edge Steel Door	24
Grand Marais Fiberglass Door	25
Timbergrain Fiberglass Door	25

## APPROVALS

- View products approved by HVHZ in our website's Technical Library, or from the Florida Building Code website.
- Our products meet the requirements for ENERGY STAR, coastal codes and industry security tests.




## FIRE RATINGS

Product	Fire Rating
Cambridge Smooth Steel Collection	20 or 90 minute
WestGuard 20-Gauge Steel Collection	20 or 90 minute
Trugrain™ Steel Collection	20 or 90 minute
Norwood Stainable Steel Collection	20 or 90 minute
TruKote Steel Collection	20 or 90 minute
Edgewood® Wood-Edge Steel Collection	20 minute
Grand Marais Fiberglass Collection	20 minute (select styles)
Timbergrain Fiberglass Collection	not rated



## FIRE GLASS

NOTE: Other styles available by request.

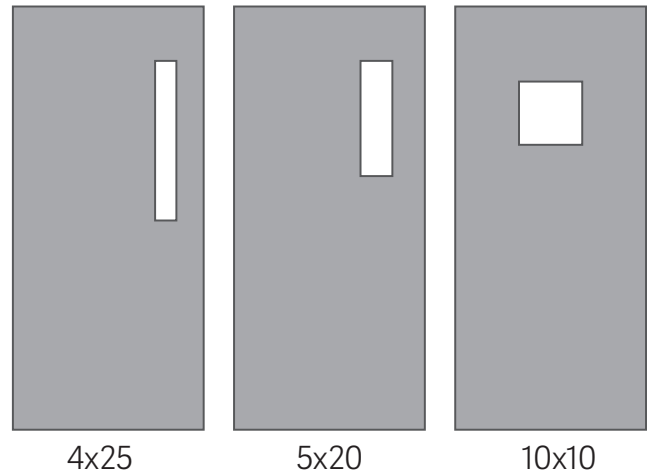

## TEXAS HURRICANE & WIND LOAD APPROVALS

Texas Department of Insurance (TDI) approvals

Product	Description	TDI Approval Numbers
Impact	6/8 and 8/0 Glazed Steel Entry Doors, Inswing and Outswing, Singles and Doubles, with and without Sidelights	DR-737, TX4504, TX4505, TX4506, TX4507
Impact	7/0 Opaque Steel Entry Doors with IDP Adjustable Steel Door Frame, Inswing and Outswing, Singles	DR-740, TX4503
Impact	7/0 Opaque Steel Entry Doors with Dunbarton Adjustable Steel Door Frame, Inswing and Outswing	DR-964, TX4784
Impact	6/8 Opaque Wood Edge Steel Side Hinge Doors, Outswing and Inswing, Singles	DR-993, TX4862
Non-Impact	6/8 and 8/0 Glazed Steel Entry Doors, Inswing and Outswing, Singles and Doubles, with and without Sidelights	DR-734, TX4496, TX4497, TX4498, TX4495
Non-Impact	6/8 and 8/0 Opaque Steel Entry Doors, Inswing and Outswing, Singles and Doubles, with and without Sidelights	DR-739, TX4499, TX4500, TX4501, TX4502
Timbergrain Impact	6/8 and 8/0 Single Opaque Fiberglass Entry Doors, Inswing and Outswing	DR-606, TX4512, TX4513
Timbergrain Non-Impact	6/8 and 8/0 Glazed Fiberglass Entry Doors, Inswing, Singles & Doubles, with and without Sidelights	DR-619, TX4518, TX4259, TX4260, TX4261

# HURRICANE & WIND LOAD APPROVALS

Taylor Entrance Systems™ has products available to meet hurricane and wind load requirements. We manufacture products approved for sale in both the HVHZ (High-Velocity Hurricane Zone) and non-HVHZ areas of Florida. A detailed summary of the approvals is available from our website's Technical Library.

The approvals and details are available on the Florida Building Code (FBC) website at [floridabuilding.org](http://floridabuilding.org). To access these documents, search under the Product Approval section.

Florida Approval Number	Model, Number, or Name	Description	Approved for use in HVHZ	Approved for use outside HVHZ	Impact Resistant
FL-8845.1	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Single (X) Configuration up to 6/8 in Height	X	X	X
FL-8845.2	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Single with Sidelite (XO or OX) Configuration up to 6/8 in Height	X	X	X
FL-8845.3	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Single with Sidelites (OXO) Configuration up to 6/8 in Height	X	X	X
FL-8845.4	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Double (XX) Configuration up to 6/8 in Height	X	X	X
FL-8845.5	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Double with Sidelites (OXXO) Configuration up to 6/8 in Height	X	X	X
FL-8845.6	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Single (X) Configuration up to 8/0 in Height	X	X	X
FL-8845.7	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Single with Sidelite (XO or OX) Configuration up to 8/0 in Height	X	X	X
FL-8845.8	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Single with Sidelites (OXO) Configuration up to 8/0 in Height	X	X	X
FL-8845.9	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Double (XX) Configuration up to 8/0 in Height	X	X	X
FL-8845.10	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Double with Sidelites (OXXO) Configuration up to 8/0 in Height	X	X	X
FL-8845.11	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Single (X) Configuration up to 6/8 in Height	X	X	X
FL-8845.12	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Single with Sidelite (XO or OX) Configuration up to 6/8 in Height	X	X	X
FL-8845.13	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Single with Sidelites (OXO) Configuration up to 6/8 in Height	X	X	X
FL-8845.14	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Double (XX) Configuration up to 6/8 in Height	X	X	X
FL-8845.15	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Double with Sidelites (OXXO) Configuration up to 6/8 in Height	X	X	X
FL-8845.16	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Single (X) Configuration up to 8/0 in Height	X	X	X
FL-8845.17	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Single with Sidelite (XO or OX) Configuration up to 8/0 in Height	X	X	X
FL-8845.18	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Single with Sidelites (OXO) Configuration up to 8/0 in Height	X	X	X
FL-8845.19	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Double (XX) Configuration up to 8/0 in Height	X	X	X
FL-8845.20	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Double with Sidelites (OXXO) Configuration up to 8'0 in Height	X	X	X
FL-9542.1	Steel Edge Door - Glazed	6/8 "Non-Impact" Glazed Steel Edge Single Insulated Steel Door - Outswing / Inswing (X) Configuration		X	
FL-9542.2	Steel Edge Door - Glazed	6/8 "Non-Impact" Glazed Steel Edge Single Insulated Steel Door with or without "Non-Impact" Sidelite or Sidelites - Outswing / Inswing (OX or XO; OXO) Configurations		X	
FL-9542.3	Steel Edge Door - Glazed	6/8 "Non-Impact" Glazed Steel Edge Double Insulated Steel Door with or without "Non-Impact" Sidelites - Outswing / Inswing (XX; OXXO) Configurations		X	
FL-9542.4	Steel Edge Door - Glazed	8/0 "Non-Impact" Glazed Steel Edge Single Insulated Steel Door - Outswing / Inswing (X) Configuration		X	



Florida Approval Number	Model, Number, or Name	Description	Approved for use in HVHZ	Approved for use outside HVHZ	Impact Resistant
FL-9542.5	Steel Edge Door - Glazed	8/0 "Non-Impact" Glazed Steel Edge Single Insulated Steel Door with or without "Non-Impact" Sidelite or Sidelites - Outswing / Inswing (OX or XO; OXO) Configurations		X	
FL-9542.6	Steel Edge Door - Glazed	8/0 "Non-Impact" Glazed Steel Edge Double Insulated Steel Door with or without "Non-Impact" Sidelites - Outswing / Inswing (XX; OXXO) Configurations		X	
FL-14513.1	Steel Edge Door - Opaque	Up to a Nominal 3/6 x 7/0 Opaque Steel Edge Steel Door in a Two Piece Steel Frame System (K2A Series Steel frame). Inswing / Outswing Configuration (X)	X	X	X
FL-14513.2	Steel Edge Door - Opaque	Up to a Nominal 3/6 x 7/0 Opaque Steel Edge Steel Door in a Fixed Steel Frame System (F Series Steel frame). Inswing / Outswing Configuration (X)	X	X	X
FL-14513.3	Steel Edge Door - Opaque	Up to a Nominal 3/6 x 7/0 Opaque Steel Edge Steel Door in a Two Piece Steel Frame System (Rediflex Steel frame). Inswing / Outswing Configuration (X)		X	X
FL-15135.1	Wood Edge Door - Glazed	Insulated Glazed Wood Edge Steel Door - Single (X) Outswing/Inswing Configurations up to 6/8 in Height		X	
FL-15135.2	Wood Edge Door - Glazed	Insulated Glazed Wood Edge Steel Door - Single with or without Sidelites (OX or XO, OXO) Outswing/Inswing Configurations up to 6/8 in Height		X	
FL-15135.3	Wood Edge Door - Glazed	Insulated Glazed Wood Edge Steel Door - Double with or without Sidelites (XX, OXXO) Outswing/Inswing Configurations up to 6/8 in Height		X	
FL-15135.4	Wood Edge Door - Glazed	Insulated "Impact" Glazed Wood Edge Steel Door - Single (X) Outswing/Inswing Configurations up to 6/8 in Height		X	X
FL-15135.5	Wood Edge Door - Glazed	Insulated "Impact" Glazed Wood Edge Steel Door - Single with or without Sidelites (OX or XO, OXO) Outswing/Inswing Configurations up to 6/8 in Height		X	X
FL-15135.6	Wood Edge Door - Glazed	Insulated "Impact" Glazed Wood Edge Steel Door - Double with or without Sidelites (XX, OXXO) Outswing/Inswing Configurations up to 6/8 in Height		X	X
FL-15135.7	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Single (X) Outswing/Inswing Configurations up to 6/8 in Height		X	X
FL-15135.8	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Single with or without Sidelites (OX or XO, OXO) Outswing/Inswing Configurations up to 6/8 in Height (Utilizes Taylor "Impact" Sidelites)		X	X
FL-15135.9	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Double with or without Sidelites (XX, OXXO) Outswing/Inswing Configurations up to 6/8 in Height (Utilizes Taylor "Impact" Sidelites)		X	X
FL-15135.10	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Single with or without Sidelites (OX or XO, OXO) Outswing/Inswing Configurations up to 6/8 in Height (Utilizes ODL "Impact" Sidelites)		X	X
FL-15135.11	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Double with Sidelites (OXXO) Outswing/Inswing Configurations up to 6/8 in Height (Utilizes ODL "Impact" Sidelites)		X	X
FL-15135.12	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Single (X) Outswing/Inswing Configurations up to 8/0 in Height		X	X
FL-15135.13	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Single with or without Sidelites (OX or XO, OXO) Outswing/Inswing Configurations up to 8/0 in Height (Utilizes Taylor "Impact" Sidelites)		X	X
FL-15135.14	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Double with or without Sidelites (XX, OXXO) Outswing/Inswing Configurations up to 8/0 in Height (Utilizes Taylor "Impact" Sidelites)		X	X
FL-15135.15	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Single with or without Sidelites (OX or XO, OXO) Outswing/Inswing Configurations up to 8/0 in Height (Utilizes ODL "Impact" Sidelites)		X	X
FL-15135.16	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Double with Sidelites (OXXO) Outswing/Inswing Configurations up to 8/0 in Height (Utilizes ODL "Impact" Sidelites)		X	X
FL-15931.1	Timbergrain	Up to a 3/0 x 6/8 Opaque Fiberglass Door (X Configuration) Inswing/Outswing		X	X
FL-15931.2	Timbergrain	Up to a 3/0 x 6/8 Opaque Fiberglass Door with Non-impact Fiberglass Sidelite or Sidelites - Insulated Glass (XO or OX, OXO Configurations) Inswing or Outswing		X	
FL-15931.3	Timbergrain	Up to a 6/0 x 6/8 Opaque Fiberglass Door with or without Non-impact Fiberglass Sidelites - Insulated Glass (XX or OXXO Configurations) Inswing or Outswing		X	
FL-15931.4	Timbergrain	Up to a 3/0 x 6/8 Non-impact Glazed Fiberglass Door with Non-impact Glazed Fiberglass Sidelite or Sidelites - Insulated Glass (X, XO or OX, OXO Configurations) Inswing or Outswing		X	
FL-15931.5	Timbergrain	Up to a 6/0 x 6/8 Non-impact Glazed Fiberglass Door with or without Non-impact Fiberglass Sidelites - Insulated Glass (XX or OXXO Configurations) Inswing or Outswing		X	
FL-15931.6	Timbergrain	Up to a 3/0 x 8/0 Opaque Fiberglass Door (X Configuration) Inswing/Outswing		X	X
FL-15931.7	Timbergrain	Up to a 3/0 x 8/0 Opaque Fiberglass Door with Non-impact Fiberglass Sidelite or Sidelites - Insulated Glass (XO or OX, OXO Configurations) Inswing or Outswing		X	
FL-15931.8	Timbergrain	Up to a 6/0 x 8/0 Opaque Fiberglass Door with or without Non-impact Fiberglass Sidelites - Insulated Glass (XX or OXXO Configurations) Inswing or Outswing		X	
FL-15931.9	Timbergrain	Up to a 3/0 x 8/0 Non-impact Glazed Fiberglass Door with Non-impact Glazed Fiberglass Sidelite or Sidelites - Insulated Glass (X, XO or OX, OXO Configurations) Inswing or Outswing		X	
FL-15931.10	Timbergrain	Up to a 6/0 x 8/0 Non-impact Glazed Fiberglass Door with or without Non-impact Fiberglass Sidelites - Insulated Glass (XX or OXXO Configurations) Inswing or Outswing		X	



# 75 YEARS OF INNOVATION

## CUSTOM CAPABILITIES

Our entry doors can be customized to fit your spec.

## ADDITIONAL AVAILABILITY

Additional sizes and styles may be available with extended lead times.

## NO MINIMUMS OR MAXIMUMS

With no order requirements, you can get what you need, when you need it.



## **MICHIGAN MADE**

Passion, hard work and respect – it's the culture of our workplace. We meticulously test for quality every day to ensure that you are receiving the best product we can produce. When you choose Taylor, you are choosing quality. Our products are built with pride and confidence, giving you the satisfaction of buying a high-quality, American made, reliable product.

## **HARD WORK + DEDICATION**

We've established a management philosophy in which teamwork plays an important role. Our employees work together to manufacture quality entrance systems while our customers work closely with professionals to meet the demands of the end user.

## **PRODUCT INNOVATION**

An unwavering commitment to beauty, quality, and value has allowed Taylor Entrance Systems™ to develop a long history of innovation, bringing numerous products to the market that have helped to further shape the fenestration industry.

We are dedicated to providing innovative solutions and value-added products to fill the needs in an ever-changing marketplace.

## **PARTNERSHIP**

At Taylor Entrance Systems™, we credit our success to our dedicated employees, the quality of our products and the integrity of our customers. Building meaningful relationships in all aspects of our business is a priority.

Contact our exceptional Customer Service department for order inquiries.

Phone: 800.248.3600

Fax: 800.252.5468

Request a Quote: [quotes@taylordoor.com](mailto:quotes@taylordoor.com)

Place an Order: [orders@taylordoor.com](mailto:orders@taylordoor.com)

Beauty, quality,  
and value are on  
display in every  
product we make.



*Shown: WestGuard Steel,  
3-Panel Flat Shaker*

**TAYLOR ENTRANCE SYSTEMS™**  
631 North First Street  
West Branch, Michigan 48661

**TAYLOR**  
Entrance Systems™

Phone: 800.248.3600  
Fax: 800.252.5468  
Orders: [orders@taylordoor.com](mailto:orders@taylordoor.com)

**RIVER CITY  
MILLWORK**

815-965-9439 | [www.rivercitymillwork.com](http://www.rivercitymillwork.com)