



JELD WEN
WINDOWS & DOORS

Interior Doors

Molded | Flush | Studio™
TRIA™ | MODA® | Wood



Interior Doors for Every Space

JELD-WEN offers a complete line of interior doors fitting your style and budget.

With one of the widest selections available, there's an interior door for every application. From simple, contemporary doors to highly ornate — you decide.

Find interior doors to inspire your spaces with JELD-WEN.



MODA® PMP1035

Interior Doors at a Glance



Molded

So many possibilities for transforming a room, with your choice of styles, colors and finishes.


PAGES 6-33



Flush

Keep it simple. Dependable, economical doors that combine strength and beauty.

PAGES 34-37

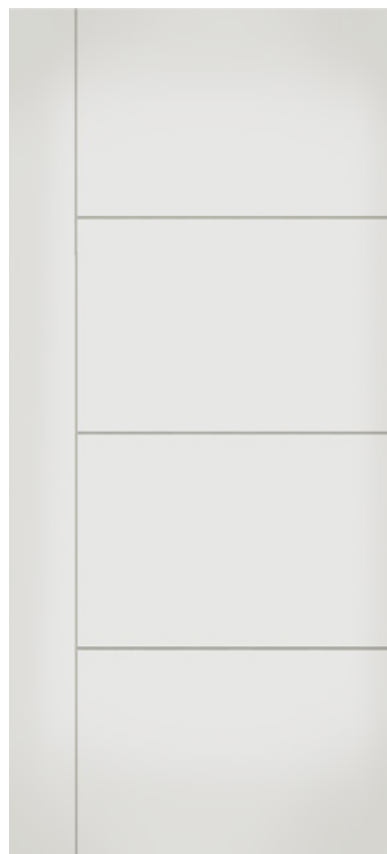

Studio™

Crisp detail defines these modern doors. Choose from six contemporary styles.

PAGES 38-53



TRIA™

Made-to-order doors that artfully reflect your style. Explore all the brilliant details.

PAGES 54-61



MODA®

Clean lines, stunning effect come together in a complete line of doors for every space.

PAGES 62-65



Wood

Rich, elegant wood elevates the look of any doorway. Customizable features let you design.

PAGES 66-71



Molded Interior Door

ADD STYLE TO YOUR SPACES


With a wide variety of panel styles to choose from, there's a door for every aesthetic.

Explore all the options to find the ideal complement to your room.


Molded Door Options

STICKING PROFILES


Choose from traditional or contemporary sticking profiles.




CRAFTSMAN STICKING
JELD-WEN EXCLUSIVE



STEPPED STICKING




OVOLO STICKING




COVE & BEAD STICKING


AVAILABLE SIZES



14 WIDTHS BETWEEN 1'0" - 3'0"




HEIGHTS OF 6'8", 7'0" OR 8'0"



THICKNESSES OF 1 3/8" OR 1 3/4"

CORE OPTIONS




**PROCORE®
SOLID CORE**
Combination wood/
MDF or all-wood frame



20-minute
fire rating

PROCORE
THE QUIET DOOR®




**SOLID MINERAL
CORE**

All-wood frame



60-minute*
fire rating

*Available in raised
panel designs only



**HOLLOW
CORE**

Wood/MDF frame

Blocking behind
panels for support

Finishing Options

Choose the stain or paint that suits your style. We'll do the work. Our factory finish process saves you time and creates a more durable finish than an at-home paint job.

PAINTED*

Fresh colors add character to your spaces. Whether you prefer light or dark, there's a color for you. Select from 11 hues.




Frost



Shortbread



Fog



Ash



Linen



Mink



Colony



Graphite



Granite



Marine




Onyx




WOODVIEW™ COLLECTION*


Woodview™ Collection finishing involves a two-tone color process, creating the look of real wood without the maintenance.




Amaretto



Chocolate



Espresso



Hazelnut




*1-Year Factory Applied Prefinish Warranty. See jeld-wen.com for details.




STATEMENT™ DENIM ON SANTA FE™

STATEMENT™ COLLECTION*


Statement™ Collection finishing delivers an artisan, hand-brushed effect. On-trend colors and texture blend for a beautiful appearance.



Black Cherry



Denim



Juniper




Saffron




Stone

RAISED PANEL




COLONIST®
 Smooth & Textured
 Cove & Bead Sticking
 6'8", 7'0" & 8'0"
 Product Details pg. 12-13


 **IMPRESSION™ MIRROR**
 Opposite Side
 Textured Only
 Product Details pg. 31




COVENTRY®
 Smooth
 Cove & Bead Sticking
 6'8", 7'0" & 8'0"
 Product Details pg. 14




ROCKPORT™
 Smooth
 Cove & Bead Sticking
 6'8", 7'0" & 8'0"
 Product Details pg. 15




CAMBRIDGE™
 Smooth
 Ovolo Sticking
 6'8", 7'0" & 8'0"
 Product Details pg. 16




CARRARA®
 Smooth
 Cove & Bead Sticking
 6'8", 7'0" & 8'0"
 Product Details pg. 17




AVALON®
 Textured
 Cove & Bead Sticking
 6'8" & 7'0"
 Product Details pg. 18




CAMDEN®
 Textured
 Cove & Bead Sticking
 6'8" & 7'0"
PRINCETON™
 Smooth
 Cove & Bead Sticking
 6'8", 7'0" & 8'0"
 Product Details pg. 19-20




CAIMAN®
 Smooth
 Cove & Bead Sticking
 6'8", 7'0" & 8'0"
 Product Details pg. 21




CONTINENTAL™
 Smooth
 Ovolo Sticking
 6'8", 7'0" & 8'0"
 Product Details pg. 22



CORVADO®
 Smooth
 Cove & Bead Sticking
 6'8", 7'0" & 8'0"
 Product Details pg. 23




SANTA FE™
 Smooth
 Ovolo Sticking
 6'8", 7'0" & 8'0"
 Product Details pg. 24




CASHAL®
 Smooth
 Cove & Bead Sticking
 6'8", 7'0" & 8'0"
 Product Details pg. 25

Selection varies by market. See your JELD-WEN sales representative for details.


FLAT PANEL




CRAFTSMAN III™
Smooth
Craftsman Sticking
6'8" & 7'0"
Product Details pg. 26




MADISON®
Smooth
Craftsman Sticking
6'8", 7'0" & 8'0"
Product Details pg. 27



CONMORE®
Smooth
Stepped Sticking
6'8" & 7'0"
Product Details pg. 28




MONROE®
Smooth
Craftsman Sticking
6'8", 7'0" & 8'0"
Product Details pg. 29




BIRKDALE™
Smooth
Craftsman Sticking
6'8", 7'0" & 8'0"
Product Details pg. 30

For bifold product details, see pg. 32


COMMERCIAL WIDE STILE



COLONIST®
Smooth Wide Stile
Cove & Bead Sticking
6'8" & 7'0"
Product Details pg. 33



CAMBRIDGE™
Smooth Wide Stile
Ovolo Sticking
6'8" & 7'0"
Product Details pg. 33




CONTINENTAL™
Smooth Wide Stile
Ovolo Sticking
6'8" & 7'0"
Product Details pg. 33

Selection varies by market. See your JELD-WEN sales representative for details.

PRODUCT DETAIL


COLONIST® SMOOTH



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Three	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 1/4"	6 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Three	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Six	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
2'4"	6'8" 7'0"	Six	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
2'6"	6'8" 7'0"	Six	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Six	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
3'0"	6'8" 7'0"	Six	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
1'0" 1'2" 1'3" 1'4"	8'0"	Three	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
1'6" 1'8"	8'0"	Three	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
1'10" 2'0" 2'2"	8'0"	Six	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
2'4"	8'0"	Six	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
2'6"	8'0"	Six	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
2'8" 2'10"	8'0"	Six	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
3'0"	8'0"	Six	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



COLONIST® TEXTURED

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Three	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Pine Grain	•	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Three	1 3/8" 1 3/4"	11 7/8"	3 1/16" (1'6") 4 1/16" (1'8")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Pine Grain	•	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Six	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Pine Grain	•	N/A	•	N/A
2'4"	6'8" 7'0"	Six	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Pine Grain	•	N/A	•	N/A
2'6"	6'8" 7'0"	Six	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Pine Grain	•	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Six	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Pine Grain	•	N/A	•	N/A
3'0"	6'8" 7'0"	Six	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Pine Grain	•	N/A	•	N/A
1'0" 1'2" 1'3" 1'4"	8'0"	Three	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 1/4"	7"	8 1/4"	CB	Pine Grain	•	N/A	•	N/A
1'6" 1'8"	8'0"	Three	1 3/8" 1 3/4"	9 3/4"	4 1/8" (1'6") 5 1/8" (1'8")	N/A	4 1/4"	7"	8 1/4"	CB	Pine Grain	•	N/A	•	N/A
1'10" 2'0" 2'2"	8'0"	Six	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Pine Grain	•	N/A	•	N/A
2'4"	8'0"	Six	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Pine Grain	•	N/A	•	N/A
2'6"	8'0"	Six	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Pine Grain	•	N/A	•	N/A
2'8" 2'10"	8'0"	Six	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Pine Grain	•	N/A	•	N/A
3'0"	8'0"	Six	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Pine Grain	•	N/A	•	N/A


COVENTRY®



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	6 13/16"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	6 13/16"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Four	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 13/16"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
2'4"	6'8" 7'0"	Four	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 13/16"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
2'6"	6'8" 7'0"	Four	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 13/16"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Four	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 13/16"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
3'0"	6'8" 7'0"	Four	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 13/16"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	5 1/4"	6 5/8"	8 1/4"	CB	Smooth	•	N/A	•	N/A
1'6" 1'8"	8'0"	Two	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	5 1/4"	6 5/8"	8 1/4"	CB	Smooth	•	N/A	•	N/A
1'10" 2'0" 2'2"	8'0"	Four	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	5 1/4"	6 5/8"	8 1/4"	CB	Smooth	•	N/A	•	N/A
2'4"	8'0"	Four	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	5 1/4"	6 5/8"	8 1/4"	CB	Smooth	•	N/A	•	N/A
2'6"	8'0"	Four	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	5 1/4"	6 5/8"	8 1/4"	CB	Smooth	•	N/A	•	N/A
2'8" 2'10"	8'0"	Four	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	5 1/4"	6 5/8"	8 1/4"	CB	Smooth	•	N/A	•	N/A
3'0"	8'0"	Four	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	5 1/4"	6 5/8"	8 1/4"	CB	Smooth	•	N/A	•	N/A


STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO

*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



ROCKPORT™

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'6" 1'8"	6'8" 7'0"	Five	1 3/8" 1 3/4"	10 1/4"	3 7/8" (1'6") 4 7/8" (1'8")	N/A	4 5/8" (6'8") 6 1/2" (7'0")	N/A	8 3/8" (6'8") 10 1/2" (7'0")	CB	Smooth	•	N/A	•	N/A
2'0"	6'8" 7'0"	Five	1 3/8" 1 3/4"	15 3/4"	4 1/8"	N/A	4 5/8" (6'8") 6 1/2" (7'0")	N/A	8 3/8" (6'8") 10 1/2" (7'0")	CB	Smooth	•	N/A	•	N/A
2'2" 2'4"	6'8" 7'0"	Five	1 3/8" 1 3/4"	19 3/4"	3 1/8" (2'2") 4 1/8" (2'4")	N/A	4 5/8" (6'8") 6 1/2" (7'0")	N/A	8 3/8" (6'8") 10 1/2" (7'0")	CB	Smooth	•	N/A	•	N/A
2'6"	6'8" 7'0"	Five	1 3/8" 1 3/4"	21 3/4"	4 1/8"	N/A	4 5/8" (6'8") 6 1/2" (7'0")	N/A	8 3/8" (6'8") 10 1/2" (7'0")	CB	Smooth	•	N/A	•	N/A
2'8"	6'8" 7'0"	Five	1 3/8" 1 3/4"	23 3/4"	4 1/8"	N/A	4 5/8" (6'8") 6 1/2" (7'0")	N/A	8 3/8" (6'8") 10 1/2" (7'0")	CB	Smooth	•	N/A	•	N/A
2'10" 3'0"	6'8" 7'0"	Five	1 3/8" 1 3/4"	25 3/4"	4 1/8" (2'10") 5 1/8" (3'0")	N/A	4 5/8" (6'8") 6 1/2" (7'0")	N/A	8 3/8" (6'8") 10 1/2" (7'0")	CB	Smooth	•	N/A	•	N/A
1'6" 1'8"	8'0"	Six	1 3/8" 1 3/4"	8 1/2"	4 3/4" (1'6") 5 3/4" (1'8")	N/A	4 5/8"	4 1/4"	10 1/8"	CB	Smooth	•	N/A	•	N/A
2'0" 2'2"	8'0"	Six	1 3/8" 1 3/4"	14 1/2"	4 3/4" (2'0") 5 3/4" (2'2")	N/A	4 5/8"	4 1/4"	10 1/8"	CB	Smooth	•	N/A	•	N/A
2'4"	8'0"	Six	1 3/8" 1 3/4"	18 1/2"	4 3/4"	N/A	4 5/8"	4 1/4"	10 1/8"	CB	Smooth	•	N/A	•	N/A
2'6"	8'0"	Six	1 3/8" 1 3/4"	20 1/2"	4 3/4"	N/A	4 5/8"	4 1/4"	10 1/8"	CB	Smooth	•	N/A	•	N/A
2'8" 2'10"	8'0"	Six	1 3/8" 1 3/4"	22 1/2"	4 3/4" (2'8") 5 3/4" (2'10")	N/A	4 5/8"	4 1/4"	10 1/8"	CB	Smooth	•	N/A	•	N/A
3'0"	8'0"	Six	1 3/8" 1 3/4"	25 3/4"	5 1/8"	N/A	4 5/8"	4 1/4"	10 1/8"	CB	Smooth	•	N/A	•	N/A




CAMBRIDGE™

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	5 9/16"	3 7/32"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
1'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	7 9/16"	3 7/32"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
1'3"	6'8" 7'0"	Two	1 3/8" 1 3/4"	8 9/16"	3 7/32"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	9 9/16"	3 7/32"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	11 9/16"	3 7/32" (1'6") 4 7/32" (1'8")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
1'10" 2'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	13 11/16"	4 5/32" (1'10") 5 5/32" (2'0")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
2'2" 2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	17 11/16"	4 5/32" (2'2") 5 5/32" (2'4")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	19 11/16"	5 5/32"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
2'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	21 11/16"	5 5/32"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
2'10" 3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	23 3/4"	5 1/8" (2'10") 6 1/8" (3'0")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 7/16"	7"	8 15/16"	O	Smooth	•	•	•	•
1'6" 1'8"	8'0"	Two	1 3/8" 1 3/4"	9 3/4"	4 1/8" (1'6") 5 1/8" (1'8")	N/A	4 7/16"	7"	8 15/16"	O	Smooth	•	•	•	•
1'10" 2'0"	8'0"	Two	1 3/8" 1 3/4"	13 11/16"	4 5/32" (1'10") 5 5/32" (2'0")	N/A	4 7/16"	7"	8 15/16"	O	Smooth	•	•	•	•
2'2" 2'4"	8'0"	Two	1 3/8" 1 3/4"	17 11/16"	4 5/32" (2'2") 5 5/32" (2'4")	N/A	4 7/16"	7"	8 15/16"	O	Smooth	•	•	•	•
2'6"	8'0"	Two	1 3/8" 1 3/4"	19 11/16"	5 5/32"	N/A	4 7/16"	7"	8 15/16"	O	Smooth	•	•	•	•
2'8"	8'0"	Two	1 3/8" 1 3/4"	21 11/16"	5 5/32"	N/A	4 7/16"	7"	8 15/16"	O	Smooth	•	•	•	•
2'10" 3'0"	8'0"	Two	1 3/8" 1 3/4"	23 11/16"	5 5/32" (2'10") 6 5/32" (3'0")	N/A	4 7/16"	7"	8 15/16"	O	Smooth	•	•	•	•


STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO

*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



CARRARA®

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	6 11/16"	2 21/32"	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Smooth	•	•	•	•
1'2" 1'3" 1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	7 1/2"	3 1/4" (1'2") 3 3/4" (1'3") 4 1/4" (1'4")	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Smooth	•	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	9 1/2"	4 1/4" (1'6") 5 1/4" (1'8")	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Smooth	•	•	•	•
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	14 15/16"	3 17/32" (1'0") 4 17/32" (2'0") 5 17/32" (2'2")	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Smooth	•	•	•	•
2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	18 1/8"	4 15/16"	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Smooth	•	•	•	•
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	19 11/16"	5 5/32"	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Smooth	•	•	•	•
2'8" 2'10"	6'8" 7'0"	Two	Smooth 1 3/8" 1 3/4"	22 13/16"	4 19/32" (2'8") 5 19/32" (2'10")	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Smooth	•	•	•	•
3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	25"	5 1/2"	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Smooth	•	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	5 1/4"	6 13/16"	8 1/4"	CB	Smooth	•	•	•	•
1'6" 1'8"	8'0"	Two	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	5 1/4"	6 13/16"	8 1/4"	CB	Smooth	•	•	•	•
1'10" 2'0" 2'2"	8'0"	Two	1 3/8" 1 3/4"	15 5/8"	3 3/16" (1'10") 4 3/16" (2'0") 5 3/16" (2'2")	N/A	5 1/4"	6 13/16"	8 1/4"	CB	Smooth	•	•	•	•
2'4"	8'0"	Two	1 3/8" 1 3/4"	17 5/8"	5 3/16"	N/A	5 1/4"	6 13/16"	8 1/4"	CB	Smooth	•	•	•	•
2'6"	8'0"	Two	1 3/8" 1 3/4"	19 5/8"	5 3/16"	N/A	5 1/4"	6 13/16"	8 1/4"	CB	Smooth	•	•	•	•
2'8" 2'10"	8'0"	Two	1 3/8" 1 3/4"	21 5/8"	5 3/16" (2'8") 6 3/16" (2'10")	N/A	5 1/4"	6 13/16"	8 1/4"	CB	Smooth	•	•	•	•
3'0"	8'0"	Two	1 3/8" 1 3/4"	23 5/8"	6 3/16"	N/A	5 1/4"	6 13/16"	8 1/4"	CB	Smooth	•	•	•	•




AVALON®

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Three	1 3/8" 1 3/4"	6 3/16"	2 29/32"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	7 7/8" (6'8") 9 7/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
1'2" 1'3" 1'4"	6'8" 7'0"	Three	1 3/8" 1 3/4"	7 11/16"	3 5/32" (1'2") 3 21/32" (1'3") 4 5/32" (1'4")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	7 7/8" (6'8") 9 7/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Three	1 3/8" 1 3/4"	8 3/4"	4 5/8" (1'6") 5 5/8" (1'8")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	7 7/8" (6'8") 9 7/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
1'10" 2'0"	6'8" 7'0"	Three	1 3/8" 1 3/4"	15 5/8"	3 3/16" (1'10") 4 3/16" (2'0")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	7 7/8" (6'8") 9 7/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
2'2" 2'4"	6'8" 7'0"	Three	1 3/8" 1 3/4"	19 5/8"	3 3/16" (2'2") 4 3/16" (2'4")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	7 7/8" (6'8") 9 7/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
2'6"	6'8" 7'0"	Three	1 3/8" 1 3/4"	21 5/8"	4 3/16"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	7 7/8" (6'8") 9 7/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Three	1 3/8" 1 3/4"	23 5/8"	4 3/16" (2'8") 5 3/16" (2'10")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	7 7/8" (6'8") 9 7/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
3'0"	6'8" 7'0"	Three	1 3/8" 1 3/4"	27 5/8"	4 3/16"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	7 7/8" (6'8") 9 7/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A


STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO

*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



CAMDEN®

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	6 11/16"	2 21/32"	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
1'2" 1'3" 1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	7 1/2"	3 1/4" (1'2") 3 3/4" (1'3") 4 1/4" (1'4")	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	9 1/2"	4 1/4" (1'6") 5 1/4" (1'8")	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	14 15/16"	3 17/32" (1'10") 4 17/32" (2'0") 5 17/32" (2'2")	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	18 1/8"	4 15/16"	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	19 11/16"	5 5/32"	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Two	1 3/8" 1 3/4"	22 13/16"	4 19/32" (2'8") 5 19/32" (2'10")	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	25"	5 1/2"	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A




PRINCETON™

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0" 1'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	6 11/16"	2 21/32" (1'0") 3 21/32" (1'2")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	3 11/16"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
1'3" 1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	8 9/16"	3 7/32" (1'3") 3 23/32" (1'4")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	3 11/16"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	9 1/2"	4 1/4" (1'6") 5 1/4" (1'8")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	3 11/16"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
1'10" 2'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	15"	3 1/2" (1'10") 4 1/2" (2'0")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	3 11/16"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
2'2" 2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	18 3/16"	3 29/32" (2'2") 4 29/32" (2'4")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	3 11/16"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	19 3/4"	5 1/8"	N/A	5 1/4" (6'8") 7 1/4" (7'0")	3 11/16"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Two	1 3/8" 1 3/4"	22 7/8"	4 9/16" (2'8") 5 9/16" (2'10")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	3 11/16"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	25 1/16"	5 15/32"	N/A	5 1/4" (6'8") 7 1/4" (7'0")	3 11/16"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	5 1/4"	3 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
1'6" 1'8"	8'0"	Two	1 3/8" 1 3/4"	9 1/2"	4 1/4" (1'6") 5 1/4" (1'8")	N/A	5 1/4"	3 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
1'10" 2'0"	8'0"	Two	1 3/8" 1 3/4"	14 15/16"	3 17/32" (1'10") 4 17/32" (2'0")	N/A	5 1/4"	3 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
2'2" 2'4"	8'0"	Two	1 3/8" 1 3/4"	18 1/8"	3 15/16" (2'2") 4 15/16" (2'4")	N/A	5 1/4"	3 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
2'6"	8'0"	Two	1 3/8" 1 3/4"	19 11/16"	5 5/32"	N/A	5 1/4"	3 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
2'8"	8'0"	Two	1 3/8" 1 3/4"	22 13/16"	4 1/2"	N/A	5 1/4"	3 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
2'10" 3'0"	8'0"	Two	1 3/8" 1 3/4"	25"	4 1/2" (2'10") 5 1/2" (3'0")	N/A	5 1/4"	3 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A


STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO

*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



CAIMAN®

Panel Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	15 3/4"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	88 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	17 3/4"	5 1/8"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	19 3/4"	5 1/8"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
2'8" 2'10"	6'8" 7'0"	Two	1 3/8" 1 3/4"	21 3/4"	5 1/8" (2'8") 6 1/8" (2'10")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	23 3/4"	6 1/8"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1 3/8" 1 3/4"	12"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
1'10" 2'0" 2'2"	8'0"	Two	1 3/8" 1 3/4"	15 3/4"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
2'4"	8'0"	Two	1 3/8" 1 3/4"	17 3/4"	5 1/8"	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
2'6"	8'0"	Two	1 3/8" 1 3/4"	19 3/4"	5 1/8"	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
2'8" 2'10"	8'0"	Two	1 3/8" 1 3/4"	21 3/4"	5 1/8" (2'8") 6 1/8" (2'10")	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
3'0"	8'0"	Two	1 3/8" 1 3/4"	23 3/4"	6 1/8"	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•




CONTINENTAL™

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	5 9/16"	3 7/32"	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	•	•	•
1'2" 1'3" 1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	8 9/16"	2 23/32" (1'2") 3 7/32" (1'3") 3 23/32" (1'4")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	10 9/16"	3 23/32" (1'6") 4 23/32" (1'8")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	•	•	•
1'10" 2'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	14"	4" (1'10") 5" (2'0")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	•	•	•
2'2" 2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	18"	4" (2'2") 5" (2'4")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	•	•	•
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	20"	5"	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	•	•	•
2'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	21"	5 1/2"	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	•	•	•
2'10" 3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	24"	5" (2'10") 6" (3'0")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	5 1/4"	4 1/4"	11"	O	Smooth	•	•	•	•
1'6" 1'8"	8'0"	Two	1 3/8" 1 3/4"	9 3/4"	4 1/8" (1'6") 5 1/8" (1'8")	N/A	5 1/4"	4 1/4"	11"	O	Smooth	•	•	•	•
1'10" 2'0" 2'2"	8'0"	Two	1 3/8" 1 3/4"	14"	4" (1'10") 5" (2'0") 6" (2'2")	N/A	5 1/4"	4 1/4"	11"	O	Smooth	•	•	•	•
2'4"	8'0"	Two	1 3/8" 1 3/4"	18"	5"	N/A	5 1/4"	4 1/4"	11"	O	Smooth	•	•	•	•
2'6"	8'0"	Two	1 3/8" 1 3/4"	20"	5"	N/A	5 1/4"	4 1/4"	11"	O	Smooth	•	•	•	•
2'8" 2'10" 3'0"	8'0"	Two	1 3/8" 1 3/4"	24"	5" (2'8") 5" (2'10") 6" (3'0")	N/A	5 1/4"	4 1/4"	11"	O	Smooth	•	•	•	•


STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO

*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



CORVADO®

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	4 3/16" (6'8") 6 3/16" (7'0")	6 5/8"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	15 5/8"	3 3/16" (1'10") 4 3/16" (2'0") 5 3/16" (2'2")	N/A	4 3/16" (6'8") 6 3/16" (7'0")	6 5/8"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	19 5/8"	4 3/16"	N/A	4 3/16" (6'8") 6 3/16" (7'0")	6 5/8"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	21 5/8"	4 3/16"	N/A	4 3/16" (6'8") 6 3/16" (7'0")	6 5/8"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Two	1 3/8" 1 3/4"	23 5/8"	4 3/16" (2'8") 5 3/16" (2'10")	N/A	4 3/16" (6'8") 6 3/16" (7'0")	6 5/8"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	25 5/8"	5 3/16"	N/A	4 3/16" (6'8") 6 3/16" (7'0")	6 5/8"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
1'6" 1'8"	8'0"	Two	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	5 3/16"	6 5/8"	8 3/16"	CB	Smooth	•	N/A	•	N/A
1'10" 2'0" 2'2"	8'0"	Two	1 3/8" 1 3/4"	15 5/8"	3 3/16" (1'10") 4 3/16" (2'0") 5 3/16" (2'2")	N/A	5 3/16"	6 5/8"	8 3/16"	CB	Smooth	•	N/A	•	N/A
2'4"	8'0"	Two	1 3/8" 1 3/4"	19 5/8"	4 3/16"	N/A	5 3/16"	6 5/8"	8 3/16"	CB	Smooth	•	N/A	•	N/A
2'6"	8'0"	Two	1 3/8" 1 3/4"	21 5/8"	4 3/16"	N/A	5 3/16"	6 5/8"	8 3/16"	CB	Smooth	•	N/A	•	N/A
2'8" 2'10"	8'0"	Two	1 3/8" 1 3/4"	23 5/8"	4 3/16" (2'8") 5 3/16" (2'10")	N/A	5 3/16"	6 5/8"	8 3/16"	CB	Smooth	•	N/A	•	N/A
3'0"	8'0"	Two	1 3/8" 1 3/4"	25 5/8"	5 3/16"	N/A	5 3/16"	6 5/8"	8 3/16"	CB	Smooth	•	N/A	•	N/A




SANTA FE™

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 3/8" (6'8") 6 3/8" (7'0")	7"	9 7/8" (6'8") 11 7/8" (7'0")	O	Smooth	•	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	10"	4" (1'6") 5" (1'8")	N/A	4 3/8" (6'8") 6 3/8" (7'0")	7"	9 7/8" (6'8") 11 7/8" (7'0")	O	Smooth	•	•	•	•
1'10" 2'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	14"	4" (1'10") 5" (2'0")	N/A	4 3/8" (6'8") 6 3/8" (7'0")	7"	9 7/8" (6'8") 11 7/8" (7'0")	O	Smooth	•	•	•	•
2'2" 2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	18"	4" (2'2") 5" (2'4")	N/A	4 3/8" (6'8") 6 3/8" (7'0")	7"	9 7/8" (6'8") 11 7/8" (7'0")	O	Smooth	•	•	•	•
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	21"	4 1/2"	N/A	4 3/8" (6'8") 6 3/8" (7'0")	7"	9 7/8" (6'8") 11 7/8" (7'0")	O	Smooth	•	•	•	•
2'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	23"	4 1/2"	N/A	4 3/8" (6'8") 6 3/8" (7'0")	7"	9 7/8" (6'8") 11 7/8" (7'0")	O	Smooth	•	•	•	•
2'10" 3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	24"	5" (2'10") 6" (3'0")	N/A	4 3/8" (6'8") 6 3/8" (7'0")	7"	9 7/8" (6'8") 11 7/8" (7'0")	O	Smooth	•	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 3/8"	7"	9 7/8"	O	Smooth	•	•	•	•
1'6" 1'8"	8'0"	Two	1 3/8" 1 3/4"	10"	4" (1'6") 5" (1'8")	N/A	4 3/8"	7"	9 7/8"	O	Smooth	•	•	•	•
1'10" 2'0"	8'0"	Two	1 3/8" 1 3/4"	14"	4" (1'10") 5" (2'0")	N/A	4 3/8"	7"	9 7/8"	O	Smooth	•	•	•	•
2'2" 2'4"	8'0"	Two	1 3/8" 1 3/4"	18"	4" (2'2") 5" (2'4")	N/A	4 3/8"	7"	9 7/8"	O	Smooth	•	•	•	•
2'6"	8'0"	Two	1 3/8" 1 3/4"	21"	4 1/2"	N/A	4 3/8"	7"	9 7/8"	O	Smooth	•	•	•	•
2'8"	8'0"	Two	1 3/8" 1 3/4"	23"	4 1/2"	N/A	4 3/8"	7"	9 7/8"	O	Smooth	•	•	•	•
2'10" 3'0"	8'0"	Two	1 3/8" 1 3/4"	24"	5" (2'10") 6" (3'0")	N/A	4 3/8"	7"	9 7/8"	O	Smooth	•	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



CASHAL®

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	15 5/8"	3 3/16" (1'10") 4 3/16" (2'0") 5 3/16" (2'2")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	19 5/8"	4 3/16"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	21 5/8"	4 3/16"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
2'8" 2'10"	6'8" 7'0"	Two	1 3/8" 1 3/4"	23 5/8"	4 3/16" (2'8") 5 3/16" (2'10")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	25 5/8"	5 3/16"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
1'6" 1'8"	8'0"	Two	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
1'10" 2'0" 2'2"	8'0"	Two	1 3/8" 1 3/4"	15 5/8"	3 3/16" (1'10") 4 3/16" (2'0") 5 3/16" (2'2")	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
2'4"	8'0"	Two	1 3/8" 1 3/4"	19 5/8"	4 3/16"	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
2'6"	8'0"	Two	1 3/8" 1 3/4"	21 5/8"	4 3/16"	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
2'8" 2'10"	8'0"	Two	1 3/8" 1 3/4"	23 5/8"	4 3/16" (2'8") 5 3/16" (2'10")	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
3'0"	8'0"	Two	1 3/8" 1 3/4"	25 5/8"	5 3/16"	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•


CRAFTSMAN III™



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	4"	4"	N/A	4 5/8" (6'8") 6 5/8" (7'0")	N/A	8 15/16" (6'8") 10 15/16" (7'0")	Flat	C	Smooth	•	•	•	•
1'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	6"	4"	N/A	4 5/8" (6'8") 6 5/8" (7'0")	N/A	8 15/16" (6'8") 10 15/16" (7'0")	Flat	C	Smooth	•	•	•	•
1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	8 1/4"	3 7/8"	N/A	4 5/8" (6'8") 6 5/8" (7'0")	N/A	8 15/16" (6'8") 10 15/16" (7'0")	Flat	C	Smooth	•	•	•	•
1'6" 1'8" 1'10"	6'8" 7'0"	Two	1 3/8" 1 3/4"	10"	4" (1'6") 5" (1'8") 6" (1'10")	N/A	4 5/8" (6'8") 6 5/8" (7'0")	N/A	8 15/16" (6'8") 10 15/16" (7'0")	Flat	C	Smooth	•	•	•	•
2'0"	6'8" 7'0"	Three	1 3/8" 1 3/4"	15"	4 1/2"	4 1/2"	4 5/8" (6'8") 6 5/8" (7'0")	N/A	8 15/16" (6'8") 10 15/16" (7'0")	Flat	C	Smooth	•	•	•	•
2'2" 2'4"	6'8" 7'0"	Three	1 3/8" 1 3/4"	17"	4 1/2" (2'2") 5 1/2" (2'4")	4 1/2"	4 5/8" (6'8") 6 5/8" (7'0")	N/A	8 15/16" (6'8") 10 15/16" (7'0")	Flat	C	Smooth	•	•	•	•
2'6" 2'8"	6'8" 7'0"	Three	1 3/8" 1 3/4"	21"	4 1/2" (2'6") 5 1/2" (2'8")	4 1/2"	4 5/8" (6'8") 6 5/8" (7'0")	N/A	8 15/16" (6'8") 10 15/16" (7'0")	Flat	C	Smooth	•	•	•	•
2'10" 3'0"	6'8" 7'0"	Three	1 3/8" 1 3/4"	25"	4 1/2" (2'10") 5 1/2" (3'0")	4 1/2"	4 5/8" (6'8") 6 5/8" (7'0")	N/A	8 15/16" (6'8") 10 15/16" (7'0")	Flat	C	Smooth	•	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



MADISON®

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0" 1'2" 1'3"	6'8" 7'0"	One	1 3/8" 1 3/4"	5 3/8"	3 5/16" (1'0") 4 5/16" (1'2") 4 13/16" (1'3")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	C	Smooth	•	•	•	•
1'4" 1'6"	6'8" 7'0"	One	1 3/8" 1 3/4"	7 13/16"	4 3/32" (1'4") 5 3/32" (1'6")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	C	Smooth	•	•	•	•
1'8" 1'10"	6'8" 7'0"	One	1 3/8" 1 3/4"	11 1/2"	4 1/4" (1'8") 5 1/4" (1'10")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	C	Smooth	•	•	•	•
2'0" 2'2"	6'8" 7'0"	One	1 3/8" 1 3/4"	15 1/2"	4 1/4" (2'0") 5 1/4" (2'2")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	C	Smooth	•	•	•	•
2'4"	6'8" 7'0"	One	1 3/8" 1 3/4"	18 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	C	Smooth	•	•	•	•
2'6"	6'8" 7'0"	One	1 3/8" 1 3/4"	20 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	C	Smooth	•	•	•	•
2'8" 2'10"	6'8" 7'0"	One	1 3/8" 1 3/4"	22 1/2"	4 3/4" (2'8") 5 3/4" (2'10")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	C	Smooth	•	•	•	•
3'0"	6'8" 7'0"	One	1 3/8" 1 3/4"	26 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	C	Smooth	•	•	•	•
1'4" 1'6"	8'0"	One	1 3/8" 1 3/4"	7 13/16"	4 3/32" (1'4") 5 3/32" (1'6")	N/A	4 3/4"	N/A	10 1/4"	Flat	C	Smooth	•	•	•	•
1'8" 1'10"	8'0"	One	1 3/8" 1 3/4"	11 1/2"	4 1/4" (1'8") 5 1/4" (1'10")	N/A	4 3/4"	N/A	10 1/4"	Flat	C	Smooth	•	•	•	•
2'0" 2'2"	8'0"	One	1 3/8" 1 3/4"	15 1/2"	4 1/4" (2'0") 5 1/4" (2'2")	N/A	4 3/4"	N/A	10 1/4"	Flat	C	Smooth	•	•	•	•
2'4"	8'0"	One	1 3/8" 1 3/4"	18 1/2"	4 3/4"	N/A	4 3/4"	N/A	10 1/4"	Flat	C	Smooth	•	•	•	•
2'6"	8'0"	One	1 3/8" 1 3/4"	20 1/2"	4 3/4"	N/A	4 3/4"	N/A	10 1/4"	Flat	C	Smooth	•	•	•	•
2'8" 2'10"	8'0"	One	1 3/8" 1 3/4"	22 1/2"	4 3/4" (2'8") 5 3/4" (2'10")	N/A	4 3/4"	N/A	10 1/4"	Flat	C	Smooth	•	•	•	•
3'0"	8'0"	One	1 3/8" 1 3/4"	26 1/2"	4 3/4"	N/A	4 3/4"	N/A	10 1/4"	Flat	C	Smooth	•	•	•	•


CONMORE®



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'6" 1'8"	6'8" 7'0"	Five	1 3/8" 1 3/4"	9 5/8"	4 3/16" (1'6") 5 3/16" (1'8")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	S	Smooth	•	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Five	1 3/8" 1 3/4"	15 5/8"	3 3/16" (1'10") 4 3/16" (2'0") 5 3/16" (2'2")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	S	Smooth	•	N/A	•	N/A
2'4"	6'8" 7'0"	Five	1 3/8" 1 3/4"	19 5/8"	4 3/16"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	S	Smooth	•	N/A	•	N/A
2'6"	6'8" 7'0"	Five	1 3/8" 1 3/4"	21 5/8"	4 3/16"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	S	Smooth	•	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Five	1 3/8" 1 3/4"	23 5/8"	4 3/16" (2'8") 5 3/16" (2'10")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	S	Smooth	•	N/A	•	N/A
3'0"	6'8" 7'0"	Five	1 3/8" 1 3/4"	25 5/8"	5 3/16"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	S	Smooth	•	N/A	•	N/A

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



MONROE®

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	6"	3"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
1'2" 1'3"	6'8" 7'0"	Two	1 3/8" 1 3/4"	7 1/2"	3 1/2" (1'2") 3 3/4" (1'3")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
1'4" 1'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	9 1/4"	3 3/8" (1'4") 4 3/8" (1'6")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
1'8" 1'10"	6'8" 7'0"	Two	1 3/8" 1 3/4"	11 1/2"	4 1/4" (1'8") 5 1/4" (1'10")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
2'0" 2'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	15 1/2"	4 1/4" (2'0") 5 1/4" (2'2")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	18 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	20 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
2'8" 2'10"	6'8" 7'0"	Two	1 3/8" 1 3/4"	22 1/2"	4 3/4" (2'8") 5 3/4" (2'10")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	26 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
1'4" 1'6"	8'0"	Two	1 3/8" 1 3/4"	9 1/4"	3 3/8" (1'4") 4 3/8" (1'6")	N/A	4 3/4"	7"	11 1/8"	C	Smooth	•	•	•	•
1'8" 1'10"	8'0"	Two	1 3/8" 1 3/4"	11 1/2"	4 1/4" (1'8") 5 1/4" (1'10")	N/A	4 3/4"	7"	11 1/8"	C	Smooth	•	•	•	•
2'0" 2'2"	8'0"	Two	1 3/8" 1 3/4"	15 1/2"	4 1/4" (2'0") 5 1/4" (2'2")	N/A	4 3/4"	7"	11 1/8"	C	Smooth	•	•	•	•
2'4"	8'0"	Two	1 3/8" 1 3/4"	18 1/2"	4 3/4"	N/A	4 3/4"	7"	11 1/8"	C	Smooth	•	•	•	•
2'6"	8'0"	Two	1 3/8" 1 3/4"	20 1/2"	4 3/4"	N/A	4 3/4"	7"	11 1/8"	C	Smooth	•	•	•	•
2'8" 2'10"	8'0"	Two	1 3/8" 1 3/4"	22 1/2"	4 3/4" (2'8") 5 3/4" (2'10")	N/A	4 3/4"	7"	11 1/8"	C	Smooth	•	•	•	•
3'0"	8'0"	Two	1 3/8" 1 3/4"	26 1/2"	4 3/4"	N/A	4 3/4"	7"	11 1/8"	C	Smooth	•	•	•	•


BIRKDALE™



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Three	1 3/8"	6"	3"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
1'2" 1'3"	6'8" 7'0"	Three	1 3/8"	7 1/2"	3 1/2" (1'2") 3 3/4" (1'3")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
1'4" 1'6"	6'8" 7'0"	Three	1 3/8"	9 1/4"	3 3/8" (1'4") 4 3/8" (1'6")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
1'8" 1'10"	6'8" 7'0"	Three	1 3/8"	11 1/2"	4 1/4" (1'8") 5 1/4" (1'10")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
2'0" 2'2"	6'8" 7'0"	Three	1 3/8"	15 1/2"	4 1/4" (2'0") 5 1/4" (2'2")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
2'4"	6'8" 7'0"	Three	1 3/8"	18 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
2'6"	6'8" 7'0"	Three	1 3/8"	20 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
2'8" 2'10"	6'8" 7'0"	Three	1 3/8"	22 1/2"	4 3/4" (2'8") 5 3/4" (2'10")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
3'0"	6'8" 7'0"	Three	1 3/8"	26 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
1'0"	8'0"	Three	1 3/8"	6"	3"	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•
1'2" 1'3"	8'0"	Three	1 3/8"	7 1/2"	3 1/4" (1'2") 3 3/4" (1'3")	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•
1'4" 1'6"	8'0"	Three	1 3/8"	9 1/4"	3 3/8" (1'4") 4 3/8" (1'6")	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•
1'8" 1'10"	8'0"	Three	1 3/8"	11 1/2"	4 1/4" (1'8") 5 1/4" (1'10")	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•
2'0" 2'2"	8'0"	Three	1 3/8"	15 1/2"	4 1/4" (2'0") 5 1/4" (2'2")	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•
2'4"	8'0"	Three	1 3/8"	18 1/2"	4 3/4"	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•
2'6"	8'0"	Three	1 3/8"	20 1/2"	4 3/4"	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•
2'8" 2'10"	8'0"	Three	1 3/8"	22 1/2"	4 3/4" (2'8") 5 3/4" (2'10")	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•
3'0"	8'0"	Three	1 3/8"	26 1/2"	4 3/4"	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO

*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.




IMPRESSION™ MIRROR DOOR

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
2'0"	6'8"	One	1 3/8"	15 3/8"	4 1/4"	N/A	4 1/4"	N/A	9 3/8"	Flat	CB	Pine Grain	•	N/A	•	N/A
2'4"	6'8"	One	1 3/8"	19 3/8"	4 5/16"	N/A	4 1/4"	N/A	9 3/8"	Flat	CB	Pine Grain	•	N/A	•	N/A
2'6"	6'8"	One	1 3/8"	21 3/8"	4 5/16"	N/A	4 1/4"	N/A	9 3/8"	Flat	CB	Pine Grain	•	N/A	•	N/A
2'8"	6'8"	One	1 3/8"	23 3/8"	4 5/16"	N/A	4 1/4"	N/A	9 3/8"	Flat	CB	Pine Grain	•	N/A	•	N/A
3'0"	6'8"	One	1 3/8"	27 3/8"	4 5/16"	N/A	4 1/4"	N/A	9 3/8"	Flat	CB	Pine Grain	•	N/A	•	N/A

REVERSE IS COLONIST TEXTURED 6-PANEL ONLY


BIFOLDS



Door Design	Heights*	No. of Panels	Thickness	Widths* 2 doors or 1 unit	Widths* 4 doors or 2 units
Avalon®	6'7"; 6'11"	6	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Caiman®	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Cambridge™	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Camden®	6'7"; 6'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Carrara®	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Cashal®	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Colonist® Smooth	6'7"; 6'11"; 7'11"	6	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Colonist® Textured	6'7"; 6'11"; 7'11"	6	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Conmore®	6'7"; 6'11"	10	1 3/8"	1'10"; 2'0"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Continental™	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Corvado®	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Coventry®	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Craftsman III™	6'7"; 6'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Madison®	6'7"; 6'11"; 7'11"	2	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Monroe®	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Princeton™	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Rockport™	6'7"; 6'11"; 7'11"	10	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Santa Fe™	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Birkdale™	6'7"; 6'11"; 7'11"	6	1 3/8"	1'6"; 1'8"; 1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'0"; 3'4"; 3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"

*All panel, inner stile, top rail and lock rail measurements will match those listed above. Outer stile measurements may vary 1/4" (depending on profit).
 All bottom rail measurements will be 1" shorter than the measurements listed above in order to accommodate track and hardware.
 Bifolds are available in alternate heights and widths. Please contact JELD-WEN customer service for specifications and availability of alternate sizes.
 All bifolds are boxed (or endcapped) with track and hardware included.

COMMERCIAL WIDE STILE
CAMBRIDGE™, COLONIST® AND CONTINENTAL™

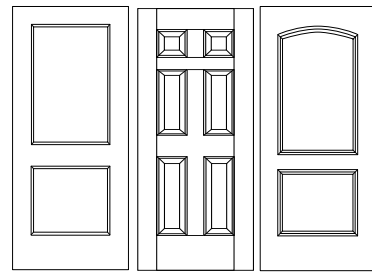

Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
3'0" Cambridge™ Beaded	6'8" 7'0"	Two	1 3/8" 1 3/4"	23"	6 1/2"	N/A	4 7/16" (6'8") 6" 1/4" (7'0")	6 3/8"	11 11/16" (6'8") 13 7/8" (7'0")	O	Smooth	•	N/A	•	N/A
3'0" Colonist®	6'8" 7'0"	Six	1 3/8" 1 3/4"	9 5/8"	6 1/2"	3 3/4"	5 7/8" (6'8") 7 7/8" (7'0")	6 3/4"	10 5/8" (6'8") 12 5/8" (7'0")	CB	Smooth	•	N/A	•	N/A
3'0" Continental™	6'8" 7'0"	Two	1 3/8" 1 3/4"	24"	6"	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	N/A	•	N/A

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO




Flush Interior Door

SIMPLICITY AND RELIABILITY MEET


Our flush interior doors are offered in a variety of colors and woodgrains. They are built to endure everyday life, so you can be confident in their durability. All flush interior doors are available with ProCore The Quiet Door® construction, reducing sound transmission.

Flush Door Options


AVAILABLE SIZES



16 WIDTHS BETWEEN 1'0" - 4'0"




HEIGHTS OF 6'8", 7'0" OR 8'0"



THICKNESSES OF 1 3/8" OR 1 3/4"


CORE OPTIONS



PROCORE® SOLID CORE

Wood or MDF frame


 20-minute fire rating



SOLID MINERAL CORE

Mineral composite frame

 90-minute fire rating



HOLLOW CORE

Combination wood/MDF frame

Corrugated honeycomb cell core

Finishing Options

You choose whether your flush door arrives unfinished, primed and/or embossed. Or let us paint your door for you; our factory finish process saves you time and creates a more durable finish than an at-home paint job.

UNFINISHED HARDWOOD VENEER

Choose from several species. Check with your dealer for availability.



Sliced Red Oak
Slab and Bifold



Rotary-Cut Birch
Slab



Lauan (Tropical Hardwood)
Slab and Bifold

Doors are for interior applications only.



PRIMED AND EMBOSSED HARDWOOD


Primed options arrive ready to paint. Embossed doors offer the look of real stained wood.



Primed




Primed Embossed



Mendocino Oak
Embossed



Imperial Oak
Embossed



Walnut Embossed



PAINTED*


Fresh colors add character to your spaces. Whether you prefer light or dark, there's a color for you. Select from 11 hues.



Frost



Shortbread



Fog



Ash



Linen



Mink



Colony



Graphite



Granite



Marine



Onyx



FLUSH INTERIOR DOOR FEATURES

Doors	Thickness	Core	Stiles	Top and Bottom Rails	Lock Block	Construction	Standards
Particleboard Core Doors	1 3/4", 1 3/8"	Solid particleboard, mat-formed wood particleboard with density of approximately 28 lbs./cu ft. Meets or exceeds all industry requirements, including ANSI A 208.1, 1-LD-1 or 1-LD-2.	1 5/32" wood, matching or compatible to faces. Before trim.	1 5/32" top and 2 6/16" bottom MDF or wood. Before trim.	N/A	5-ply when using 2-ply hardwood faces.	Warnock Hersey International approved to fire endurance tests (1 3/4" only). WHI is an approved ICBO quality control agency.
Hollow Core Doors	1 3/8"	Expanded corrugated honeycomb to provide rigid strength.	1 5/32" wood, matching or compatible to face, or 1 5/32" MDF. Before trim.	1 5/32" or 2 5/16" MDF or wood. Before trim.	3 1/2" x 6 1/4", or 3 1/2" x 16", one or both sides, as specified. Width does not include stile.	5-ply when using 2-ply hardwood faces.	N/A
20-Minute Fire Doors (Neutral Pressure)	1 3/4"	Solid particleboard, mat-formed wood particleboard with density of approximately 28 lbs./cu ft. Meets or exceeds all industry requirements, including ANSI A 208.1, 1-LD-1 or 1-LD-2.	1 3/4" wood, matching or compatible to faces. Before trim.	1 1/4" top and 2 1/2" bottom MDF or wood. Before trim.	N/A	5-ply when using 2-ply hardwood faces.	Warnock Hersey International approved to fire endurance tests. WHI is an approved ICBO quality control agency.
90-Minute Fire Doors (Neutral Pressure)	1 3/4"	Homogeneous mineral non-asbestos. Meets or exceeds all industry requirements.	1 9/16" composite stile with 1/2" wood edge band.	2" homogeneous non-asbestos rail top and bottom. Meets or exceeds all industry requirements.	N/A	5-ply when using 2-ply hardwood faces.	Warnock Hersey International approved to fire endurance tests. WHI is an approved ICBO quality control agency.

*1-Year Factory Applied Prefinish Warranty. See jeld-wen.com for details.




Studio™ Collection

CONTEMPORARY INTERIOR DOORS


The Studio™ Collection brings a new perspective to the interior door. Highlighting accent details on smooth surfaces, these doors present a distinct look. With multiple styles available, you'll find one that complements your vision.

Studio™ Door Options


AVAILABLE SIZES



10 WIDTHS BETWEEN 1'0" - 3'0"




HEIGHTS OF 6'8", 7'0" OR 8'0"



THICKNESSES OF 1 3/8" OR 1 3/4"

CORE OPTIONS




PROCORE® SOLID CORE

Wood or MDF frame



20-minute fire rating



HOLLOW CORE

Combination wood/MDF frame

Corrugated honeycomb cell core

Not recommended for use with double door or bifold door applications due to alignment issues.

Finishing Options


Choose the stain or paint that suits your style. We'll do the work. Our factory finish process saves you time and creates a more durable finish than an at-home paint job.

PAINTED*

Fresh colors add character to your spaces. Whether you prefer light or dark, there's a color for you. Select from 11 hues.



Frost



Shortbread



Fog



Ash



Linen



Mink



Colony




Graphite



Granite



Marine




Onyx




STATEMENT™ COLLECTION*

Statement™ Collection finishing delivers an artisan, hand-brushed effect. On-trend colors and texture blend for a beautiful appearance.



Black Cherry



Denim



Juniper



Saffron




Stone




*1-Year Factory Applied Prefinish Warranty. See jeld-wen.com for details.


STUDIO™ COLLECTION




SLF100
Routed
6'8", 7'0" & 8'0"
Product Details pg. 42




SL130
Routed
6'8", 7'0" & 8'0"
Product Details pg. 44




SL220
Routed
6'8", 7'0" & 8'0"
Product Details pg. 46



SL230
Routed
6'8", 7'0" & 8'0"
Product Details pg. 48



SL300
Routed
6'8", 7'0" & 8'0"
Product Details pg. 50




SL600
Routed
6'8", 7'0" & 8'0"
Product Details pg. 52

Not recommended for use with double door or bifold door applications due to alignment issues.

PRODUCT DETAIL


SLF100



Width	Height	Thickness	Groove Width	Horizontal Grooves	No. of Panels	Panel Width	Panel Height	Head Height	Head Width	No. of Vertical Stripes	No. of Horizontal Stripes	Stripe Width
1'6"	6'8"	1 3/8"	1/8"	3	4	12 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'8"	6'8"	1 3/8"	1/8"	3	4	14 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'10"	6'8"	1 3/8"	1/8"	3	4	16 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'0"	6'8"	1 3/8"	1/8"	3	4	18 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'2"	6'8"	1 3/8"	1/8"	3	4	20 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'4"	6'8"	1 3/8"	1/8"	3	4	22 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'6"	6'8"	1 3/8"	1/8"	3	4	24 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'8"	6'8"	1 3/8"	1/8"	3	4	25 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'10"	6'8"	1 3/8"	1/8"	3	4	27 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'0"	6'8"	1 3/8"	1/8"	3	4	29 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'6"	6'8"	1 3/8"	1/8"	3	4	35 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
4'0"	6'8"	1 3/8"	1/8"	3	4	41 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'6"	7'0"	1 3/8"	1/8"	3	4	12 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'8"	7'0"	1 3/8"	1/8"	3	4	14 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'10"	7'0"	1 3/8"	1/8"	3	4	16 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'0"	7'0"	1 3/8"	1/8"	3	4	18 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'2"	7'0"	1 3/8"	1/8"	3	4	20 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'4"	7'0"	1 3/8"	1/8"	3	4	22 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'6"	7'0"	1 3/8"	1/8"	3	4	24 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'8"	7'0"	1 3/8"	1/8"	3	4	25 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'10"	7'0"	1 3/8"	1/8"	3	4	27 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'0"	7'0"	1 3/8"	1/8"	3	4	29 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'6"	7'0"	1 3/8"	1/8"	3	4	35 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
4'0"	7'0"	1 3/8"	1/8"	3	4	41 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A


Width	Height	Thickness	Groove Width	Horizontal Grooves	No. of Panels	Panel Width	Panel Height	Head Height	Head Width	No. of Vertical Stripes	No. of Horizontal Stripes	Stripe Width
1'6"	8'0"	1 3/8"	1/8"	4	5	12 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'8"	8'0"	1 3/8"	1/8"	4	5	14 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'10"	8'0"	1 3/8"	1/8"	4	5	16 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'0"	8'0"	1 3/8"	1/8"	4	5	18 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'2"	8'0"	1 3/8"	1/8"	4	5	20 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'4"	8'0"	1 3/8"	1/8"	4	5	22 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'6"	8'0"	1 3/8"	1/8"	4	5	24 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'8"	8'0"	1 3/8"	1/8"	4	5	25 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'10"	8'0"	1 3/8"	1/8"	4	5	27 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'0"	8'0"	1 3/8"	1/8"	4	5	29 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'6"	8'0"	1 3/8"	1/8"	4	5	35 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
4'0"	8'0"	1 3/8"	1/8"	4	5	41 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A

SL 130



Width	Height	Thickness	Groove Width	No. of Vertical Grooves	Horizontal Grooves	No. of Stiles	Stile Width	No. of Panels	Panel Width	Panel Height	Head Height	Head Width	No. of Vertical Stripes	No. of Horizontal Stripes	Stripe Width
1'6"	6'8"	1 3/8"	1/8"	1	3	1	5"	4	12 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'8"	6'8"	1 3/8"	1/8"	1	3	1	5"	4	14 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'10"	6'8"	1 3/8"	1/8"	1	3	1	5"	4	16 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'0"	6'8"	1 3/8"	1/8"	1	3	1	5"	4	18 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'2"	6'8"	1 3/8"	1/8"	1	3	1	5"	4	20 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'4"	6'8"	1 3/8"	1/8"	1	3	1	5"	4	22 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'6"	6'8"	1 3/8"	1/8"	1	3	1	5"	4	24 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'8"	6'8"	1 3/8"	1/8"	1	3	1	6"	4	25 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'10"	6'8"	1 3/8"	1/8"	1	3	1	6"	4	27 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'0"	6'8"	1 3/8"	1/8"	1	3	1	6"	4	29 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'6"	6'8"	1 3/8"	1/8"	1	3	1	6"	4	35 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
4'0"	6'8"	1 3/8"	1/8"	1	3	1	6"	4	41 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'6"	7'0"	1 3/8"	1/8"	1	3	1	5"	4	12 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'8"	7'0"	1 3/8"	1/8"	1	3	1	5"	4	14 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'10"	7'0"	1 3/8"	1/8"	1	3	1	5"	4	16 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'0"	7'0"	1 3/8"	1/8"	1	3	1	5"	4	18 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'2"	7'0"	1 3/8"	1/8"	1	3	1	5"	4	20 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'4"	7'0"	1 3/8"	1/8"	1	3	1	5"	4	22 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'6"	7'0"	1 3/8"	1/8"	1	3	1	5"	4	24 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'8"	7'0"	1 3/8"	1/8"	1	3	1	6"	4	25 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'10"	7'0"	1 3/8"	1/8"	1	3	1	6"	4	27 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'0"	7'0"	1 3/8"	1/8"	1	3	1	6"	4	29 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'6"	7'0"	1 3/8"	1/8"	1	3	1	6"	4	35 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
4'0"	7'0"	1 3/8"	1/8"	1	3	1	6"	4	41 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A

Width	Height	Thickness	Groove Width	No. of Vertical Grooves	Horizontal Grooves	No. of Stiles	Stile Width	No. of Panels	Panel Width	Panel Height	Head Height	Head Width	No. of Vertical Stripes	No. of Horizontal Stripes	Stripe Width
1'6"	8'0"	1 3/8"	1/8"	1	4	1	5"	5	12 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'8"	8'0"	1 3/8"	1/8"	1	4	1	5"	5	14 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'10"	8'0"	1 3/8"	1/8"	1	4	1	5"	5	16 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'0"	8'0"	1 3/8"	1/8"	1	4	1	5"	5	18 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'2"	8'0"	1 3/8"	1/8"	1	4	1	5"	5	20 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'4"	8'0"	1 3/8"	1/8"	1	4	1	5"	5	22 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'6"	8'0"	1 3/8"	1/8"	1	4	1	5"	5	24 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'8"	8'0"	1 3/8"	1/8"	1	4	1	6"	5	25 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'10"	8'0"	1 3/8"	1/8"	1	4	1	6"	5	27 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'0"	8'0"	1 3/8"	1/8"	1	4	1	6"	5	29 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'6"	8'0"	1 3/8"	1/8"	1	4	1	6"	5	35 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
4'0"	8'0"	1 3/8"	1/8"	1	4	1	6"	5	41 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A




SL220

Width	Height	Thickness	Groove Width	No. of Vertical Grooves	Horizontal Grooves	No. of Stiles	Stile Width	No. of Panels	Panel Width	Panel Height	Head Height	Head Width	No. of Vertical Stripes	No. of Horizontal Stripes	Stripe Width
1'6"	6'8"	1 3/8"	1/8"	2	2	1	5"	1	8 5/8"	80"	N/A	N/A	1	1	2"
1'8"	6'8"	1 3/8"	1/8"	2	2	1	5"	1	10 5/8"	80"	N/A	N/A	1	1	2"
1'10"	6'8"	1 3/8"	1/8"	2	2	1	5"	1	12 5/8"	80"	N/A	N/A	1	1	2"
2'0"	6'8"	1 3/8"	1/8"	2	2	1	5"	1	14 5/8"	80"	N/A	N/A	1	1	2"
2'2"	6'8"	1 3/8"	1/8"	2	2	1	5"	1	16 5/8"	80"	N/A	N/A	1	1	2"
2'4"	6'8"	1 3/8"	1/8"	2	2	1	5"	1	18 5/8"	80"	N/A	N/A	1	1	2"
2'6"	6'8"	1 3/8"	1/8"	2	2	1	5"	1	20 5/8"	80"	N/A	N/A	1	1	2"
2'8"	6'8"	1 3/8"	1/8"	2	2	1	6"	1	21 5/8"	80"	N/A	N/A	1	1	2"
2'10"	6'8"	1 3/8"	1/8"	2	2	1	6"	1	23 5/8"	80"	N/A	N/A	1	1	2"
3'0"	6'8"	1 3/8"	1/8"	2	2	1	6"	1	25 5/8"	80"	N/A	N/A	1	1	2"
3'6"	6'8"	1 3/8"	1/8"	2	2	1	6"	1	31 5/8"	80"	N/A	N/A	1	1	2"
4'0"	6'8"	1 3/8"	1/8"	2	2	1	6"	1	37 5/8"	80"	N/A	N/A	1	1	2"
1'6"	7'0"	1 3/8"	1/8"	2	2	1	5"	1	8 5/8"	84"	N/A	N/A	1	1	2"
1'8"	7'0"	1 3/8"	1/8"	2	2	1	5"	1	10 5/8"	84"	N/A	N/A	1	1	2"
1'10"	7'0"	1 3/8"	1/8"	2	2	1	5"	1	12 5/8"	84"	N/A	N/A	1	1	2"
2'0"	7'0"	1 3/8"	1/8"	2	2	1	5"	1	14 5/8"	84"	N/A	N/A	1	1	2"
2'2"	7'0"	1 3/8"	1/8"	2	2	1	5"	1	16 5/8"	84"	N/A	N/A	1	1	2"
2'4"	7'0"	1 3/8"	1/8"	2	2	1	5"	1	18 5/8"	84"	N/A	N/A	1	1	2"
2'6"	7'0"	1 3/8"	1/8"	2	2	1	5"	1	20 5/8"	84"	N/A	N/A	1	1	2"
2'8"	7'0"	1 3/8"	1/8"	2	2	1	6"	1	21 5/8"	84"	N/A	N/A	1	1	2"
2'10"	7'0"	1 3/8"	1/8"	2	2	1	6"	1	23 5/8"	84"	N/A	N/A	1	1	2"
3'0"	7'0"	1 3/8"	1/8"	2	2	1	6"	1	25 5/8"	84"	N/A	N/A	1	1	2"
3'6"	7'0"	1 3/8"	1/8"	2	2	1	6"	1	31 5/8"	84"	N/A	N/A	1	1	2"
4'0"	7'0"	1 3/8"	1/8"	2	2	1	6"	1	37 5/8"	84"	N/A	N/A	1	1	2"

Width	Height	Thickness	Groove Width	No. of Vertical Grooves	Horizontal Grooves	No. of Stiles	Stile Width	No. of Panels	Panel Width	Panel Height	Head Height	Head Width	No. of Vertical Stripes	No. of Horizontal Stripes	Stripe Width
1'6"	8'0"	1 3/8"	1/8"	2	2	1	5"	1	8 5/8"	96"	N/A	N/A	1	1	2"
1'8"	8'0"	1 3/8"	1/8"	2	2	1	5"	1	10 5/8"	96"	N/A	N/A	1	1	2"
1'10"	8'0"	1 3/8"	1/8"	2	2	1	5"	1	12 5/8"	96"	N/A	N/A	1	1	2"
2'0"	8'0"	1 3/8"	1/8"	2	2	1	5"	1	14 5/8"	96"	N/A	N/A	1	1	2"
2'2"	8'0"	1 3/8"	1/8"	2	2	1	5"	1	16 5/8"	96"	N/A	N/A	1	1	2"
2'4"	8'0"	1 3/8"	1/8"	2	2	1	5"	1	18 5/8"	96"	N/A	N/A	1	1	2"
2'6"	8'0"	1 3/8"	1/8"	2	2	1	5"	1	20 5/8"	96"	N/A	N/A	1	1	2"
2'8"	8'0"	1 3/8"	1/8"	2	2	1	6"	1	21 5/8"	96"	N/A	N/A	1	1	2"
2'10"	8'0"	1 3/8"	1/8"	2	2	1	6"	1	23 5/8"	96"	N/A	N/A	1	1	2"
3'0"	8'0"	1 3/8"	1/8"	2	2	1	6"	1	25 5/8"	96"	N/A	N/A	1	1	2"
3'6"	8'0"	1 3/8"	1/8"	2	2	1	6"	1	31 5/8"	96"	N/A	N/A	1	1	2"
4'0"	8'0"	1 3/8"	1/8"	2	2	1	6"	1	37 5/8"	96"	N/A	N/A	1	1	2"


SL230



Width	Height	Thickness	Groove Width	No. of Vertical Grooves	Horizontal Grooves	No. of Stiles	Stile Width	No. of Panels	Panel Width	Panel Height	Head Height	Head Width	No. of Vertical Stripes	No. of Horizontal Stripes	Stripe Width
1'6"	6'8"	1 3/8"	1/8"	2	3	2	5"	4	12 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'8"	6'8"	1 3/8"	1/8"	2	3	2	5"	4	14 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'10"	6'8"	1 3/8"	1/8"	2	3	2	5"	4	16 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'0"	6'8"	1 3/8"	1/8"	2	3	2	5"	4	18 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'2"	6'8"	1 3/8"	1/8"	2	3	2	5"	4	20 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'4"	6'8"	1 3/8"	1/8"	2	3	2	5"	4	22 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'6"	6'8"	1 3/8"	1/8"	2	3	2	5"	4	24 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'8"	6'8"	1 3/8"	1/8"	2	3	2	6"	4	25 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'10"	6'8"	1 3/8"	1/8"	2	3	2	6"	4	27 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'0"	6'8"	1 3/8"	1/8"	2	3	2	6"	4	29 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'6"	6'8"	1 3/8"	1/8"	2	3	2	6"	4	35 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
4'0"	6'8"	1 3/8"	1/8"	2	3	2	6"	4	41 7/8"	19 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'6"	7'0"	1 3/8"	1/8"	2	3	2	5"	4	12 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'8"	7'0"	1 3/8"	1/8"	2	3	2	5"	4	14 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'10"	7'0"	1 3/8"	1/8"	2	3	2	5"	4	16 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'0"	7'0"	1 3/8"	1/8"	2	3	2	5"	4	18 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'2"	7'0"	1 3/8"	1/8"	2	3	2	5"	4	20 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'4"	7'0"	1 3/8"	1/8"	2	3	2	5"	4	22 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'6"	7'0"	1 3/8"	1/8"	2	3	2	5"	4	24 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'8"	7'0"	1 3/8"	1/8"	2	3	2	6"	4	25 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'10"	7'0"	1 3/8"	1/8"	2	3	2	6"	4	27 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'0"	7'0"	1 3/8"	1/8"	2	3	2	6"	4	29 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'6"	7'0"	1 3/8"	1/8"	2	3	2	6"	4	35 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
4'0"	7'0"	1 3/8"	1/8"	2	3	2	6"	4	41 7/8"	21 13/16" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A

Width	Height	Thickness	Groove Width	No. of Vertical Grooves	Horizontal Grooves	No. of Stiles	Stile Width	No. of Panels	Panel Width	Panel Height	Head Height	Head Width	No. of Vertical Stripes	No. of Horizontal Stripes	Stripe Width
1'6"	8'0"	1 3/8"	1/8"	2	4	2	5"	5	12 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'8"	8'0"	1 3/8"	1/8"	2	4	2	5"	5	14 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
1'10"	8'0"	1 3/8"	1/8"	2	4	2	5"	5	16 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'0"	8'0"	1 3/8"	1/8"	2	4	2	5"	5	18 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'2"	8'0"	1 3/8"	1/8"	2	4	2	5"	5	20 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'4"	8'0"	1 3/8"	1/8"	2	4	2	5"	5	22 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'6"	8'0"	1 3/8"	1/8"	2	4	2	5"	5	24 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'8"	8'0"	1 3/8"	1/8"	2	4	2	6"	5	25 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
2'10"	8'0"	1 3/8"	1/8"	2	4	2	6"	5	27 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'0"	8'0"	1 3/8"	1/8"	2	4	2	6"	5	29 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
3'6"	8'0"	1 3/8"	1/8"	2	4	2	6"	5	35 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A
4'0"	8'0"	1 3/8"	1/8"	2	4	2	6"	5	41 7/8"	17 3/4" Top And Bottom Panels 20" Center Panels	N/A	N/A	0	0	N/A


SL300



Width	Height	Thickness	Groove Width	No. of Vertical Grooves	Horizontal Grooves	No. of Stiles	Stile Width	No. of Panels	Panel Width	Panel Height	Head Height	Head Width	No. of Vertical Stripes	No. of Horizontal Stripes	Stripe Width
1'6"	6'8"	1 3/8"	1/8"	3	0	1	5"	1	12 7/8"	80"	N/A	N/A	2	0	2"
1'8"	6'8"	1 3/8"	1/8"	3	0	1	5"	1	14 7/8"	80"	N/A	N/A	2	0	2"
1'10"	6'8"	1 3/8"	1/8"	3	0	1	5"	1	16 7/8"	80"	N/A	N/A	2	0	2"
2'0"	6'8"	1 3/8"	1/8"	3	0	1	5"	1	18 7/8"	80"	N/A	N/A	2	0	2"
2'2"	6'8"	1 3/8"	1/8"	3	0	1	5"	1	20 7/8"	80"	N/A	N/A	2	0	2"
2'4"	6'8"	1 3/8"	1/8"	3	0	1	5"	1	22 7/8"	80"	N/A	N/A	2	0	2"
2'6"	6'8"	1 3/8"	1/8"	3	0	1	5"	1	24 7/8"	80"	N/A	N/A	2	0	2"
2'8"	6'8"	1 3/8"	1/8"	3	0	1	6"	1	25 7/8"	80"	N/A	N/A	2	0	2"
2'10"	6'8"	1 3/8"	1/8"	3	0	1	6"	1	27 7/8"	80"	N/A	N/A	2	0	2"
3'0"	6'8"	1 3/8"	1/8"	3	0	1	6"	1	29 7/8"	80"	N/A	N/A	2	0	2"
3'6"	6'8"	1 3/8"	1/8"	3	0	1	6"	1	35 7/8"	80"	N/A	N/A	2	0	2"
4'0"	6'8"	1 3/8"	1/8"	3	0	1	6"	1	41 7/8"	80"	N/A	N/A	2	0	2"
1'6"	7'0"	1 3/8"	1/8"	3	0	1	5"	1	12 7/8"	84"	N/A	N/A	2	0	2"
1'8"	7'0"	1 3/8"	1/8"	3	0	1	5"	1	14 7/8"	84"	N/A	N/A	2	0	2"
1'10"	7'0"	1 3/8"	1/8"	3	0	1	5"	1	16 7/8"	84"	N/A	N/A	2	0	2"
2'0"	7'0"	1 3/8"	1/8"	3	0	1	5"	1	18 7/8"	84"	N/A	N/A	2	0	2"
2'2"	7'0"	1 3/8"	1/8"	3	0	1	5"	1	20 7/8"	84"	N/A	N/A	2	0	2"
2'4"	7'0"	1 3/8"	1/8"	3	0	1	5"	1	22 7/8"	84"	N/A	N/A	2	0	2"
2'6"	7'0"	1 3/8"	1/8"	3	0	1	5"	1	24 7/8"	84"	N/A	N/A	2	0	2"
2'8"	7'0"	1 3/8"	1/8"	3	0	1	6"	1	25 7/8"	84"	N/A	N/A	2	0	2"
2'10"	7'0"	1 3/8"	1/8"	3	0	1	6"	1	27 7/8"	84"	N/A	N/A	2	0	2"
3'0"	7'0"	1 3/8"	1/8"	3	0	1	6"	1	29 7/8"	84"	N/A	N/A	2	0	2"
3'6"	7'0"	1 3/8"	1/8"	3	0	1	6"	1	35 7/8"	84"	N/A	N/A	2	0	2"
4'0"	7'0"	1 3/8"	1/8"	3	0	1	6"	1	41 7/8"	84"	N/A	N/A	2	0	2"

Width	Height	Thickness	Groove Width	No. of Vertical Grooves	Horizontal Grooves	No. of Stiles	Stile Width	No. of Panels	Panel Width	Panel Height	Head Height	Head Width	No. of Vertical Stripes	No. of Horizontal Stripes	Stripe Width
1'6"	8'0"	1 3/8"	1/8"	3	0	1	5"	1	12 7/8"	96"	N/A	N/A	2	0	2"
1'8"	8'0"	1 3/8"	1/8"	3	0	1	5"	1	14 7/8"	96"	N/A	N/A	2	0	2"
1'10"	8'0"	1 3/8"	1/8"	3	0	1	5"	1	16 7/8"	96"	N/A	N/A	2	0	2"
2'0"	8'0"	1 3/8"	1/8"	3	0	1	5"	1	18 7/8"	96"	N/A	N/A	2	0	2"
2'2"	8'0"	1 3/8"	1/8"	3	0	1	5"	1	20 7/8"	96"	N/A	N/A	2	0	2"
2'4"	8'0"	1 3/8"	1/8"	3	0	1	5"	1	22 7/8"	96"	N/A	N/A	2	0	2"
2'6"	8'0"	1 3/8"	1/8"	3	0	1	5"	1	24 7/8"	96"	N/A	N/A	2	0	2"
2'8"	8'0"	1 3/8"	1/8"	3	0	1	6"	1	25 7/8"	96"	N/A	N/A	2	0	2"
2'10"	8'0"	1 3/8"	1/8"	3	0	1	6"	1	27 7/8"	96"	N/A	N/A	2	0	2"
3'0"	8'0"	1 3/8"	1/8"	3	0	1	6"	1	29 7/8"	96"	N/A	N/A	2	0	2"
3'6"	8'0"	1 3/8"	1/8"	3	0	1	6"	1	35 7/8"	96"	N/A	N/A	2	0	2"
4'0"	8'0"	1 3/8"	1/8"	3	0	1	6"	1	41 7/8"	96"	N/A	N/A	2	0	2"

SL600



Width	Height	Thickness	Groove Width	No. of Vertical Grooves	Horizontal Grooves	No. of Stiles	Stile Width	No. of Panels	Panel Width	Panel Height	Head Height	Head Width	No. of Vertical Stripes	No. of Horizontal Stripes	Stripe Width
2'0"	6'8"	1 3/8"	1/8"	6	0	2	5"	1	5 1/4"	80"	N/A	N/A	4	0	2"
2'2"	6'8"	1 3/8"	1/8"	6	0	2	5"	1	7 1/4"	80"	N/A	N/A	4	0	2"
2'4"	6'8"	1 3/8"	1/8"	6	0	2	5"	1	9 1/4"	80"	N/A	N/A	4	0	2"
2'6"	6'8"	1 3/8"	1/8"	6	0	2	5"	1	11 1/4"	80"	N/A	N/A	4	0	2"
2'8"	6'8"	1 3/8"	1/8"	6	0	2	6"	1	11 1/4"	80"	N/A	N/A	4	0	2"
2'10"	6'8"	1 3/8"	1/8"	6	0	2	6"	1	13 1/4"	80"	N/A	N/A	4	0	2"
3'0"	6'8"	1 3/8"	1/8"	6	0	2	6"	1	15 1/4"	80"	N/A	N/A	4	0	2"
3'6"	6'8"	1 3/8"	1/8"	6	0	2	6"	1	21 1/4"	80"	N/A	N/A	4	0	2"
4'0"	6'8"	1 3/8"	1/8"	6	0	2	6"	1	27 1/4"	80"	N/A	N/A	4	0	2"
2'0"	7'0"	1 3/8"	1/8"	6	0	2	5"	1	5 1/4"	84"	N/A	N/A	4	0	2"
2'2"	7'0"	1 3/8"	1/8"	6	0	2	5"	1	7 1/4"	84"	N/A	N/A	4	0	2"
2'4"	7'0"	1 3/8"	1/8"	6	0	2	5"	1	9 1/4"	84"	N/A	N/A	4	0	2"
2'6"	7'0"	1 3/8"	1/8"	6	0	2	5"	1	11 1/4"	84"	N/A	N/A	4	0	2"
2'8"	7'0"	1 3/8"	1/8"	6	0	2	6"	1	11 1/4"	84"	N/A	N/A	4	0	2"
2'10"	7'0"	1 3/8"	1/8"	6	0	2	6"	1	13 1/4"	84"	N/A	N/A	4	0	2"
3'0"	7'0"	1 3/8"	1/8"	6	0	2	6"	1	15 1/4"	84"	N/A	N/A	4	0	2"
3'6"	7'0"	1 3/8"	1/8"	6	0	2	6"	1	21 1/4"	84"	N/A	N/A	4	0	2"
4'0"	7'0"	1 3/8"	1/8"	6	0	2	6"	1	27 1/4"	84"	N/A	N/A	4	0	2"

Width	Height	Thickness	Groove Width	No. of Vertical Grooves	Horizontal Grooves	No. of Stiles	Stile Width	No. of Panels	Panel Width	Panel Height	Head Height	Head Width	No. of Vertical Stripes	No. of Horizontal Stripes	Stripe Width
2'0"	8'0"	1 3/8"	1/8"	6	0	2	5"	1	5 1/4"	96"	N/A	N/A	4	0	2"
2'2"	8'0"	1 3/8"	1/8"	6	0	2	5"	1	7 1/4"	96"	N/A	N/A	4	0	2"
2'4"	8'0"	1 3/8"	1/8"	6	0	2	5"	1	9 1/4"	96"	N/A	N/A	4	0	2"
2'6"	8'0"	1 3/8"	1/8"	6	0	2	5"	1	11 1/4"	96"	N/A	N/A	4	0	2"
2'8"	8'0"	1 3/8"	1/8"	6	0	2	6"	1	11 1/4"	96"	N/A	N/A	4	0	2"
2'10"	8'0"	1 3/8"	1/8"	6	0	2	6"	1	13 1/4"	96"	N/A	N/A	4	0	2"
3'0"	8'0"	1 3/8"	1/8"	6	0	2	6"	1	15 1/4"	96"	N/A	N/A	4	0	2"
3'6"	8'0"	1 3/8"	1/8"	6	0	2	6"	1	21 1/4"	96"	N/A	N/A	4	0	2"
4'0"	8'0"	1 3/8"	1/8"	6	0	2	6"	1	27 1/4"	96"	N/A	N/A	4	0	2"



TRIA™

ELEGANT WOOD COMPOSITE DOORS


TRIA™ doors present so many design possibilities. Options include carved, clean lines and architectural details. You can even design your own. Their construction helps them stand up to everyday life, and their core works hard to keep noise from traveling. TRIA doors add charm to any room.

TRIA™ Door Options


STICKING PROFILES

C-SERIES

Seamless, solid surface with raised panels and two etched profile choices




STANDARD
A wider groove for a traditional look and style




OGEE
A narrower groove for a sleeker and slimmer detail

L-SERIES

Square profiles with true shadow lines and Shaker panel design




NO STICKING
A wider groove for a traditional look and style




SQUARE STICKING
A narrower groove for a sleeker and slimmer detail

R-SERIES


Three molding options with real inlaid pieces and precision detailing



STANDARD
Standard molding profile




ARCHITECTURAL
A more intricate molding profile




DESIGNER
A more modern profile design

TRIA™ Door Options


AVAILABLE SIZES



WIDTHS BETWEEN 1'0" - 4'0"




HEIGHTS OF 6'8", 7'0" OR 8'0"



THICKNESSES OF 1 3/8" OR 1 3/4"


CORE OPTIONS



FOAM CORE

Wood frame

Available only in the C-Series




FIRE CORE

Wood frame

Available in C, L and R-Series



20-, 60- and 90-minute fire rating



SOLID CORE

Wood frame

Available in C, L and R-Series




20-minute fire rating


SPECIALTY INSERT OPTIONS

- Chalkboard
- Dry erase
- Mirror
- Glass


MOST POPULAR C-SERIES/R-SERIES/L-SERIES DESIGN OPTIONS




C 2020
R 2020
L 2020
6'8", 7'0" & 8'0"




C 2030
R 2030
L 2030
6'8", 7'0" & 8'0"




C 2030V
6'8", 7'0" & 8'0"




C 2040
R 2040
6'8", 7'0" & 8'0"




C 2050
R 2050
6'8", 7'0" & 8'0"




C 3000
R 3000
L 3000
6'8", 7'0" & 8'0"




C 3070
R 3070
L 3070
6'8", 7'0" & 8'0"




C 3240
R 3240
L 3240
6'8", 7'0" & 8'0"




C 3340
R 3340
6'8", 7'0" & 8'0"



C 4100
R 4100
L 4100
6'8", 7'0" & 8'0"




C 5000
R 5000
L 5000
6'8", 7'0" & 8'0"




C 1000
R 1000
L 1000
6'8", 7'0" & 8'0"

SERIES: C = RAISED PANEL, R = RAISED MOLDING, V = V-GROOVES, L = FLAT PANEL


C-SERIES / R-SERIES DESIGN OPTIONS




C1000 ■
R1000+◆




C1010
R1010




C1020
R1020




C1030
R1030




C1040
R1040




C1050
R1050




C2000
R2000◆




C2010
R2010




C2020
R2020◆




C2030
R2030




C2040
R2040



C2050
R2050




C2070
R2070




C2080
R2080




C2090
R2090




C2130
R2130




C2140
R2140




C2160




R2200




C2210




C3000
R3000◆




C3010
R3010




C3020
R3020




C3040
R3040




C3050
R3050




C3060
R3060




C3070
R3070◆




C3090
R3090



C3100
R3100




C3110
R3110




C3150
R3150




C3160
R3160




C3170
R3170




C3180
R3180




C3190
R3190



C3200



C3210
R3210




C3220
R3220




C3230
R3230




C3240
R3240




C3250
R3250




C3260
R3260




C3270
R3270




C3300
R3300




C3310
R3310




C3340
R3340




C4000
R4000




C4010
R4010




C4020
R4020




C4030
R4030




C4050
R4050




C4060
R4060




C4070
R4070




C4080
R4080




C4090




C4100
R4100◆




C4110
R4110




C4120
R4120



C4130
R4130




C4140
R4140

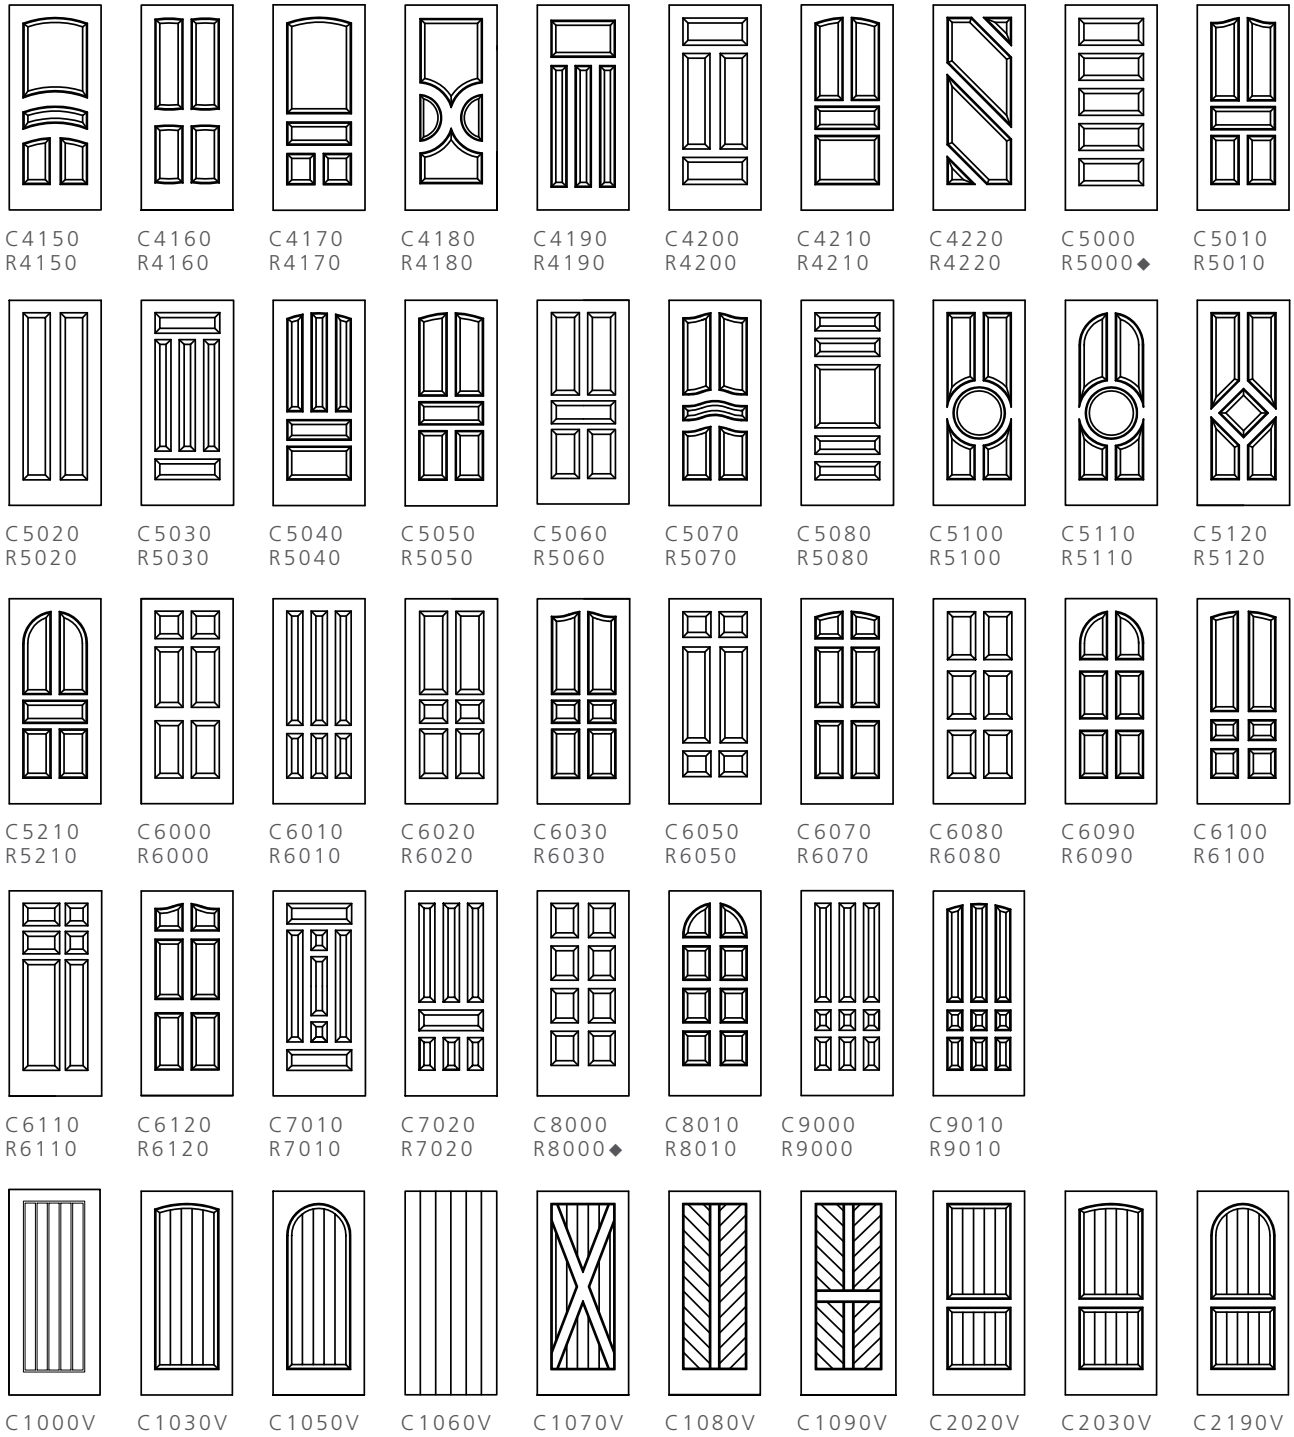


- R-Series architectural and designer raised moldings only available in 1 3/4" doors, and not available in all radius, eyebrow or reverse designs
- Bifold doors (flat back inside) available in all designs except C9000 and R3310
 - Chalkboard, dry erase and mirror specialty inserts are available in C1000 design (with a small bottom panel added) on the reverse side of any C-Series door design in 6'8" and 8'0"
 - † Mirror specialty insert is available in R1000 design (with a small bottom panel added) on the reverse side of any R-Series door design in 1 3/8" and 1 3/4" in 6'8" and 8'0"
 - ◆ Glass options are available in R-Series in 1 3/8" and 1 3/4" in 6'8", 7'0" and 8'0"

SERIES: C = RAISED PANEL, R = RAISED MOLDING, V = V-GROOVES, L = FLAT PANEL


L-SERIES DESIGN OPTIONS




L1000 ■◆



L2000 ◆




L2020 ◆




L3000 ◆




L3010




L3060 ◆




L3070




L3100




L3190




L3220




L3240




L3250




L4000




L4060




L4100 ◆




L4110




L4140




L4200




L5000 ◆




L5030




L5060




L5080




L6000




L6010




L6020




L6050




L6080




L6110




L7010



L7020



L8000 ◆



L9000

- Bifold doors (flat back inside) available in all designs except L9000
 - Chalkboard, dry erase and mirror specialty inserts are available in L1000 design (with a small bottom panel added) on the reverse side of any L-Series door design in 6'8" and 8'0"
 - ◆ Glass options are available in L-Series in 1 3/8" and 1 3/4" in 6'8", 7'0" and 8'0"

SERIES: L = FLAT PANEL






MODA[®]


The MODA[®] Collection of interior doors plays up simplicity and clean lines. Choose from 21 unique styles with solid, translucent glass, mirror or clear glass panel options. MODA doors are an excellent way to add sophistication to any space. Conceal or reveal with MODA doors. Regardless of the panel configuration you choose, MODA doors allow you to create a consistent look throughout your home.

MODA® Door Options


PANEL OPTIONS




SOLID PANEL



CLEAR GLASS




TRANSLUCENT GLASS



MIRROR

A full lite mirror on one side and your choice of 21 panel options on the opposite side*


STICKING PROFILES




FLAT PANEL

AVAILABLE SIZES


10" bottom rail is ADA-compliant and comes standard. Custom sizes available.



6 WIDTHS BETWEEN 1'6" - 3'0"




HEIGHTS OF 6'8" OR 8'0"



THICKNESS OF 1 3/8"
RAIL WIDTHS IN 2" OR 3 5/8"

CORE OPTIONS



SOLID CORE


All-wood frame




20-minute
fire rating

*Mirror available on panel door only. No design option available over mirror. Additional lead times required.


DESIGN OPTIONS




PMC1011
PMP1011
PMT1011
6'8" & 8'0"




PMC1023
PMP1023
PMT1023
6'8" & 8'0"




PMC1023N
PMP1023N
PMT1023N
6'8" & 8'0"




PMC1024
PMP1024
PMT1024
6'8" & 8'0"




PMC1024N
PMP1024N
PMT1024N
6'8" & 8'0"




PMC1032
PMP1032
PMT1032
6'8" & 8'0"




PMC1031
PMP1031
PMT1031
6'8" & 8'0"




PMC1031N
PMP1031N
PMT1031N
6'8" & 8'0"




PMC1033
PMP1033
PMT1033
6'8" & 8'0"



PMC1035N
PMP1035N
PMT1035N
6'8" & 8'0"




PMC1035
PMP1035
PMT1035
6'8" & 8'0"




PMC1036
PMP1036
PMT1036
6'8" & 8'0"


PMP = PANEL, PMT = TRANSLUCENT, PMC = CLEAR




PMC1036N
PMP1036N
PMT1036N
6'8" & 8'0"




PMC1044
PMP1044
PMT1044
6'8" & 8'0"




PMC1044N
PMP1044N
PMT1044N
6'8" & 8'0"




PMC1055
PMP1055
PMT1055
6'8" & 8'0"




PMC1055N
PMP1055N
PMT1055N
6'8" & 8'0"




PMC1072
PMP1072
PMT1072
6'8" & 8'0"



PMC1066
PMP1066
PMT1066
6'8" & 8'0"



PMC1066N
PMP1066N
PMT1066N
6'8" & 8'0"



PMC1071
PMP1071
PMT1071
6'8" & 8'0"

PMP = PANEL, PMT = TRANSLUCENT, PMC = CLEAR



Wood


RICH BEAUTY IN EVERY STYLE

Authentic wood doors showcase warmth and elegance. They elevate the sophistication of any room. Choose from a variety of wood species, panel configurations and glass options for a customized look.

Wood Door Options

WOOD SPECIES


We offer a variety of wood species to match the look you want for your home. Receive your door primed to add your own paint color.



Primed




Sustainable
Pine



Sustainable
Knotty Pine



Knotty Alder




Oak


Additional species available via special order. Contact your JELD-WEN sales representative for more details.

STICKING PROFILES


Choose from traditional or contemporary sticking profiles.




1/2" FLAT PANEL
PROFILE P, O




3/4" DOUBLE-HIP
RAISED PANEL KA




3/4" DOUBLE-HIP
RAISED PANEL PROFILE SP




3/4" SINGLE-HIP
RAISED PANEL PROFILE O



3/4" V-GROOVE PANEL KA




9/16" SINGLE-HIP
RAISED PANEL PROFILE KP




9/16" V-GROOVE
PANEL PROFILE KP


AVAILABLE SIZES



6 WIDTHS BETWEEN 1'0" - 3'0"




HEIGHTS OF 6'8" OR 8'0"




THICKNESS OF 1 3/8"


RAISED PANEL




0022 KA
6'8" & 8'0"




0028 SP, KA, O
6'8" & 8'0"



0044 SP
6'8" & 8'0"



0066 SP, KP, O
6'8" & 8'0"




0028V KA
6'8" & 8'0"
V-Groove


Additional designs available via special order. Contact your JELD-WEN sales representative for more details.

SPECIES: P = PRIMED, SP = SUSTAINABLE PINE, O = OAK, KP = KNOTTY PINE, KA = KNOTTY ALDER


FLAT PANEL




1011 P
6'8" & 8'0"




1022 P
6'8" & 8'0"




1033 P, O
6'8" & 8'0"




1035 P
6'8" & 8'0"



1055 P
6'8" & 8'0"




0028V KP, KA
6'8" & 8'0"
V-Groove




0022V KP
6'8" & 8'0"
V-Groove


LOUVERS



0730P P
6'8" & 8'0"
Plantation
2 1/4" Slats



0732P P
6'8" & 8'0"
Plantation
2 1/4" Slats




0730 P, SP
6'8" & 8'0"
Traditional
1 1/4" Slats


SPECIES: P = PRIMED, SP = SUSTAINABLE PINE, O = OAK, KP = KNOTTY PINE, KA = KNOTTY ALDER

FRENCH DOORS


Door designs available with clear glass only.




1501 P, SP
6'8" & 8'0"




1509 P, SP
6'8" & 8'0"




1510 P, SP, O
6'8" & 8'0"




1505 P, SP
6'8" & 8'0"




1515 P, SP, O
(2'4" TO 3'0")
6'8" & 8'0"



1512 P, SP
6'8" & 8'0"




1506 P, SP
6'8" & 8'0"



1518 P, SP
6'8" & 8'0"


SPECIES: P = PRIMED, SP = SUSTAINABLE PINE, O = OAK DOORS

DECORATIVE GLASS SELECTIONS





REED
Textured Glass

PRIVACY RATING | 6
0 1 2 3 4 5 6 7 8 9 10




RAIN
Textured Glass

PRIVACY RATING | 9
0 1 2 3 4 5 6 7 8 9 10




STRADA
V-Grooved Glass

PRIVACY RATING | 8
0 1 2 3 4 5 6 7 8 9 10




V-GROOVED
V-Grooved Glass

PRIVACY RATING | 1
0 1 2 3 4 5 6 7 8 9 10




LAUNDRY
Screen Print Glass

PRIVACY RATING | 8
0 1 2 3 4 5 6 7 8 9 10




RECIPE PANTRY™
Screen Print Glass

PRIVACY RATING | 6
0 1 2 3 4 5 6 7 8 9 10




PANTRY
Screen Print Glass

PRIVACY RATING | 8
0 1 2 3 4 5 6 7 8 9 10




PRIVACY FRIT
Screen Print Glass

PRIVACY RATING | 9
0 1 2 3 4 5 6 7 8 9 10




CRAFTSMAN
Screen Print Glass


PRIVACY RATING | 7
0 1 2 3 4 5 6 7 8 9 10



DECORATIVE GLASS DOORS



1501P
8'0"



1501
6'8" & 8'0"

RIVER CITY MILLWORK

815-965-9439 | www.rivercitymillwork.com



INSERT
FSC LOGO
HERE