

**JELD-WEN**<sup>®</sup>

**INTERIOR DOORS**

MOLDED | FLUSH | STUDIO™ | TRIA™

MODA<sup>®</sup> | AUTHENTIC WOOD



## INTERIOR DOORS FOR EVERY SPACE

JELD-WEN offers a complete line of interior doors fitting your style and budget. With one of the widest selections available, there's an interior door for every application. From simple, contemporary doors to highly ornate — you decide. Find interior doors to inspire your spaces with JELD-WEN.



MODA® PMP1035

# INTERIOR DOORS AT A GLANCE



## MOLDED

So many possibilities for transforming a room, with your choice of styles, colors and finishes.

PAGES 6-25



## FLUSH

Keep it simple. Dependable, economical doors that combine strength and beauty.

PAGES 26-29



## STUDIO™

Crisp detail defines these modern doors. Choose from two contemporary styles.


PAGES 30-35



### TRIA™

Made-to-order doors that artfully reflect your style. Explore all the brilliant details.

PAGES 36-43

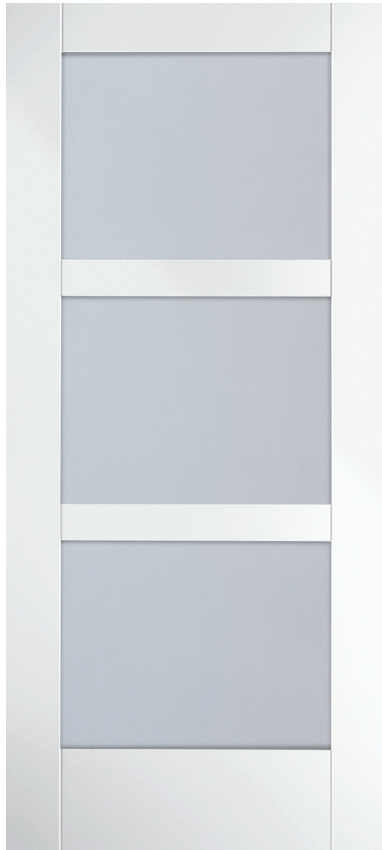

### MODA®

Clean lines, stunning effect come together in a complete line of doors for every space.

PAGES 44-47



### AUTHENTIC WOOD

Rich, elegant wood elevates the look of any doorway. Customizable features let you design.

PAGES 48-53



## MOLDED INTERIOR DOOR


### ADD STYLE TO YOUR SPACES

With a wide variety of panel styles to choose from, there's a door for every aesthetic. Explore all the options to find the ideal complement to your room.


# MOLDED DOOR OPTIONS

## STICKING PROFILES


Choose from traditional or contemporary sticking profiles.




CRAFTSMAN STICKING



STEPPED STICKING




OVOLO STICKING




COVE & BEAD STICKING


## AVAILABLE SIZES



14 WIDTHS BETWEEN 1'0" - 3'0"




HEIGHTS OF 6'8", 7'0" OR 8'0"



THICKNESSES OF 1-3/8" OR 1-3/4"


## CORE OPTIONS



**PROCORE®  
SOLID CORE**  
Combination wood/  
MDF or all-wood frame



**PROCORE**  
THE QUIET DOOR®




**SOLID MINERAL  
CORE**

All-wood frame



\*Available in raised  
panel designs only



**HOLLOW  
CORE**

Wood/MDF frame

Blocking behind  
panels for support

# FINISHING OPTIONS

Choose the stain or paint that suits your style. We'll do the work. Our factory finish process saves you time and creates a more durable finish than an at-home paint job.


## PAINTED \*

Fresh colors add character to your spaces. Whether you prefer light or dark, there's a color for you. Select from 33 hues.



## WOODVIEW™ COLLECTION \*

Woodview™ Collection finishing involves a two-tone color process, creating the look of real wood without the maintenance.

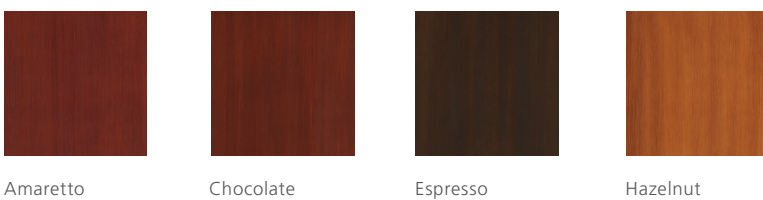

\*1-Year Factory Applied Prefinish Warranty. See [jeld-wen.com](http://jeld-wen.com) for details.

Actual colors may vary from samples shown due to printing process and/or differing monitor calibrations.









STATEMENT™ DENIM ON SANTA FE™

## STATEMENT™ COLLECTION \*

Statement™ Collection finishing delivers an artisan, hand-brushed effect. On-trend colors and texture blend for a beautiful appearance.



Black Cherry



Denim



Juniper




Saffron




Stone


# RAISED PANEL




**SANTA FE™**  
Smooth  
Ovolo Sticking  
6'8", 7'0" & 8'0"  
Product Details pg. 12




**CAMBRIDGE™**  
Smooth  
Ovolo Sticking  
6'8", 7'0" & 8'0"  
Product Details pg. 13




**CARRARA®**  
Smooth  
Cove & Bead Sticking  
6'8", 7'0" & 8'0"  
Product Details pg. 14




**CAIMAN®**  
Smooth  
Cove & Bead Sticking  
6'8", 7'0" & 8'0"  
Product Details pg. 15




**CAMDEN®**  
Textured  
Cove & Bead Sticking  
6'8" & 7'0"  
Product Details pg. 16




**ROCKPORT™**  
Smooth  
Cove & Bead Sticking  
6'8", 7'0" & 8'0"  
Product Details pg. 17



**COLONIST®**  
Smooth  
Cove & Bead Sticking  
6'8", 7'0" & 8'0"  
Product Details pg. 18




**COLONIST®**  
Textured  
Cove & Bead Sticking  
6'8", 7'0" & 8'0"  
Product Details pg. 19




**IMPRESSION™ MIRROR**  
Textured  
6'8" Only  
Opposite Side Colonist Textured  
Product Details pg. 19

Selection varies by market. See your JELD-WEN sales representative for details.


## FLAT PANEL




**MADISON®**  
Smooth  
Craftsman Sticking  
6'8", 7'0" & 8'0"  
Product Details pg. 20




**MONROE®**  
Smooth  
Craftsman Sticking  
6'8", 7'0" & 8'0"  
Product Details pg. 21



**BIRKDALE™**  
Smooth  
Craftsman Sticking  
6'8", 7'0" & 8'0"  
Product Details pg. 22




**CRAFTSMAN III™**  
Smooth  
Craftsman Sticking  
6'8" & 7'0"  
Product Details pg. 23




**CONMORE®**  
Smooth  
Stepped Sticking  
6'8" & 7'0"  
Product Details pg. 24

For bifold product details, see pg. 29


## COMMERCIAL WIDE STILE



**COLONIST®**  
Smooth Wide Stile  
Cove & Bead Sticking  
6'8" & 7'0"  
Product Details pg. 25




**CAMBRIDGE™**  
Smooth Wide Stile  
Ovolo Sticking  
6'8" & 7'0"  
Product Details pg. 25



**CONTINENTAL™**  
Smooth Wide Stile  
Ovolo Sticking  
6'8" & 7'0"  
Product Details pg. 25

Selection varies by market. See your JELD-WEN sales representative for details.

# PRODUCT DETAIL




## SANTA FE™

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	0	Smooth	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	10"	4" (1'6") 5" (1'8")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	0	Smooth	•	•	•
1'10" 2'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	14"	4" (1'10") 5" (2'0")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	0	Smooth	•	•	•
2'2" 2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	18"	4" (2'2") 5" (2'4")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	0	Smooth	•	•	•
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	21"	4-1/2"	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	0	Smooth	•	•	•
2'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	23"	4-1/2"	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	0	Smooth	•	•	•
2'10" 3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	24"	5" (2'10") 6" (3'0")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	0	Smooth	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-3/8"	7"	9-7/8"	0	Smooth	•	•	•
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	10"	4" (1'6") 5" (1'8")	N/A	4-3/8"	7"	9-7/8"	0	Smooth	•	•	•
1'10" 2'0"	8'0"	Two	1-3/8" 1-3/4"	14"	4" (1'10") 5" (2'0")	N/A	4-3/8"	7"	9-7/8"	0	Smooth	•	•	•
2'2" 2'4"	8'0"	Two	1-3/8" 1-3/4"	18"	4" (2'2") 5" (2'4")	N/A	4-3/8"	7"	9-7/8"	0	Smooth	•	•	•
2'6"	8'0"	Two	1-3/8" 1-3/4"	21"	4-1/2"	N/A	4-3/8"	7"	9-7/8"	0	Smooth	•	•	•
2'8"	8'0"	Two	1-3/8" 1-3/4"	23"	4-1/2"	N/A	4-3/8"	7"	9-7/8"	0	Smooth	•	•	•
2'10" 3'0"	8'0"	Two	1-3/8" 1-3/4"	24"	5" (2'10") 6" (3'0")	N/A	4-3/8"	7"	9-7/8"	0	Smooth	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



CAMBRIDGE™

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	5-9/16"	3-7/32"	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
1'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7-9/16"	3-7/32"	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
1'3"	6'8" 7'0"	Two	1-3/8" 1-3/4"	8-9/16"	3-7/32"	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-9/16"	3-7/32"	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-9/16"	3-7/32" (1'6") 4-7/32" (1'8")	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
1'10" 2'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	13-11/16"	4-5/32" (1'10") 5-5/32" (2'0")	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
2'2" 2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	17-11/16"	4-5/32" (2'2") 5-5/32" (2'4")	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
2'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-5/32"	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
2'10" 3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	23-11/16"	5-5/32" (2'10") 6-5/32" (3'0")	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-7/16"	7"	8-15/16"	0	Smooth	•	•	•
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	9-3/4"	4-1/8" (1'6") 5-1/8" (1'8")	N/A	4-7/16"	7"	8-15/16"	0	Smooth	•	•	•
1'10" 2'0"	8'0"	Two	1-3/8" 1-3/4"	13-11/16"	4-5/32" (1'10") 5-5/32" (2'0")	N/A	4-7/16"	7"	8-15/16"	0	Smooth	•	•	•
2'2" 2'4"	8'0"	Two	1-3/8" 1-3/4"	17-11/16"	4-5/32" (2'2") 5-5/32" (2'4")	N/A	4-7/16"	7"	8-15/16"	0	Smooth	•	•	•
2'6"	8'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	4-7/16"	7"	8-15/16"	0	Smooth	•	•	•
2'8"	8'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-5/32"	N/A	4-7/16"	7"	8-15/16"	0	Smooth	•	•	•
2'10" 3'0"	8'0"	Two	1-3/8" 1-3/4"	23-11/16"	5-5/32" (2'10") 6-5/32" (3'0")	N/A	4-7/16"	7"	8-15/16"	0	Smooth	•	•	•


CARRARA®



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-15/16"	3" (1'6") 4" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'0") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	17-11/16"	5-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'8" 2'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-5/32" (2'8") 6-5/32" (2'10")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	23-11/16"	6-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	7-1/16"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	11-15/16"	3" (1'6") 4" (1'8")	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
1'10" 2'0" 2'2"	8'0"	Two	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'10") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
2'4"	8'0"	Two	1-3/8" 1-3/4"	17-11/16"	5-5/32"	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
2'6"	8'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
2'8" 2'10"	8'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-5/32" (2'8") 6-5/32" (2'10")	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
3'0"	8'0"	Two	1-3/8" 1-3/4"	23-11/16"	6-5/32"	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



CAIMAN®

Panel Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-1/16"	1-15/32" (1'0") 2-15/32" (1'2") 2-31/32" (1'3") 3-15/32" (1'4")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-15/16"	3-1/32" (1'6") 4-1/32" (1'8")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'10") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	17-11/16"	5-5/32"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'8" 2'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-5/32" (2'8") 6-5/32" (2'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	23-11/16"	6-5/32"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	9-1/16"	1-15/32" (1'0") 2-15/32" (1'2") 2-31/32" (1'3") 3-15/32" (1'4")	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	11-15/16"	3-1/32" (1'6") 4-1/32" (1'8")	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
1'10" 2'0" 2'2"	8'0"	Two	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'10") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
2'4"	8'0"	Two	1-3/8" 1-3/4"	17-11/16"	5-5/32"	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
2'6"	8'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
2'8" 2'10"	8'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-5/32" (2'8") 6-5/32" (2'10")	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
3'0"	8'0"	Two	1-3/8" 1-3/4"	23-11/16"	6-5/32"	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•

CAMDEN®




Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	6-11/16"	2-21/32"	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7-1/2"	3-1/4" (1'2") 3-3/4" (1'3") 4-1/4" (1'4")	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-1/2"	4-1/4" (1'6") 5-1/4" (1'8")	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	14-15/16"	3-17/32" (1'10") 4-17/32" (2'0") 5-17/32" (2'2")	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	18-1/8"	4-15/16"	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	22-13/16"	4-19/32" (2'8") 5-19/32" (2'10")	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	25"	5-1/2"	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.





ROCKPORT™

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Five	1-3/8" 1-3/4"	5-7/8"	3-1/16"	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
1'2" 1'3" 1'4"	6'8" 7'0"	Five	1-3/8" 1-3/4"	8-7/8"	2-9/16" (1'2") 3-1/16" (1'3") 3-9/16" (1'4")	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Five	1-3/8" 1-3/4"	10-1/4"	3-7/8" (1'6") 4-7/8" (1'8")	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
1'10" 2'10"	6'8" 7'0"	Five	1-3/8" 1-3/4"	15-3/4"	3-1/8" (1'10") 4-1/8" (2'0")	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
2'2" 2'4"	6'8" 7'0"	Five	1-3/8" 1-3/4"	19-3/4"	3-1/8" (2'2") 4-1/8" (2'4")	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
2'6"	6'8" 7'0"	Five	1-3/8" 1-3/4"	21-3/4"	4-1/8"	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
2'8"	6'8" 7'0"	Five	1-3/8" 1-3/4"	23-3/4"	4-1/8"	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
2'10" 3'0"	6'8" 7'0"	Five	1-3/8" 1-3/4"	25-3/4"	4-1/8" (2'10") 5-1/8" (3'0")	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
1'0" 1'2" 1'3" 1'4" 1'6" 1'8"	8'0"	Six	1-3/8" 1-3/4"	8-1/2"	1-3/4" (1'0") 2-3/4" (1'2") 3-1/4" (1'3") 3-3/4" (1'4") 4-3/4" (1'6") 5-3/4" (1'8")	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A
1'10" 2'0" 2'2"	8'0"	Six	1-3/8" 1-3/4"	14-1/2"	3-3/4" (1'10") 4-3/4" (2'0") 5-3/4" (2'2")	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A
2'4"	8'0"	Six	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A
2'6"	8'0"	Six	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A
2'8" 2'10"	8'0"	Six	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A
3'0"	8'0"	Six	1-3/8" 1-3/4"	25-3/4"	5-1/8"	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A




COLONIST® SMOOTH

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Three	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 1/4"	6 3/4"	8 1/4"	CB	Smooth	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Three	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Six	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	N/A	•	N/A
2'4"	6'8" 7'0"	Six	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	N/A	•	N/A
2'6"	6'8" 7'0"	Six	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Six	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	N/A	•	N/A
3'0"	6'8" 7'0"	Six	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	N/A	•	N/A
1'0" 1'2" 1'3" 1'4"	8'0"	Three	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	N/A	•	N/A
1'6" 1'8"	8'0"	Three	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	N/A	•	N/A
1'10" 2'0" 2'2"	8'0"	Six	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	N/A	•	N/A
2'4"	8'0"	Six	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	N/A	•	N/A
2'6"	8'0"	Six	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	N/A	•	N/A
2'8" 2'10"	8'0"	Six	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	N/A	•	N/A
3'0"	8'0"	Six	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	N/A	•	N/A

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO

\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

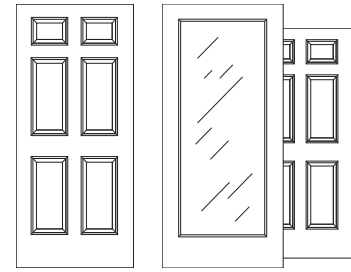

COLONIST® TEXTURED


Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-13/16"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Pine Grain	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	11-7/8"	3-1/16" (1'6") 4-1/16" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-13/16"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Pine Grain	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Six	1-3/8" 1-3/4"	6"	3-1/8" (1'10") 4-1/8" (2'0") 5-1/8" (2'2")	3-13/16"	4-1/4" (6'8") 6-1/4" (7'0")	6-13/16"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Pine Grain	N/A	•	N/A
2'4"	6'8" 7'0"	Six	1-3/8" 1-3/4"	8"	4-1/8"	3-13/16"	4-1/4" (6'8") 6-1/4" (7'0")	6-13/16"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Pine Grain	N/A	•	N/A
2'6"	6'8" 7'0"	Six	1-3/8" 1-3/4"	9"	4-1/8"	3-13/16"	4-1/4" (6'8") 6-1/4" (7'0")	6-13/16"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Pine Grain	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Six	1-3/8" 1-3/4"	10"	4-1/8" (2'8") 5-1/8" (2'10")	3-13/16"	4-1/4" (6'8") 6-1/4" (7'0")	6-13/16"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Pine Grain	N/A	•	N/A
3'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	12"	4-1/8"	3-13/16"	4-1/4" (6'8") 6-1/4" (7'0")	6-13/16"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Pine Grain	N/A	•	N/A
1'0" 1'2" 1'3" 1'4"	8'0"	Three	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/4"	6-7/8"	8-1/4"	CB	Pine Grain	N/A	•	N/A
1'6" 1'8"	8'0"	Three	1-3/8" 1-3/4"	11-7/8"	3" (1'6") 4" (1'8")	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Pine Grain	N/A	•	N/A
1'10" 2'0" 2'2"	8'0"	Six	1-3/8" 1-3/4"	6"	3-1/8" (1'10") 4-1/8" (2'0") 5-1/8" (2'2")	3-3/4"	5-1/4"	6-13/16"	8-1/4"	CB	Pine Grain	N/A	•	N/A
2'4"	8'0"	Six	1-3/8" 1-3/4"	8"	4-1/8"	3-3/4"	5-1/4"	6-13/16"	8-1/4"	CB	Pine Grain	N/A	•	N/A
2'6"	8'0"	Six	1-3/8" 1-3/4"	9"	4-1/8"	3-3/4"	5-1/4"	6-13/16"	8-1/4"	CB	Pine Grain	N/A	•	N/A
2'8" 2'10"	8'0"	Six	1-3/8" 1-3/4"	10"	4-1/8" (2'8") 5-1/8" (2'10")	3-3/4"	5-1/4"	6-13/16"	8-1/4"	CB	Pine Grain	N/A	•	N/A
3'0"	8'0"	Six	1-3/8" 1-3/4"	12"	4-1/8"	3-3/4"	5-1/4"	6-13/16"	8-1/4"	CB	Pine Grain	N/A	•	N/A

IMPRESSION™ MIRROR

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	Statement™	Paint	Woodview™
2'0"	6'8"	One	1-3/8"	15-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	Flat	CB	Pine Grain	N/A	•	N/A
2'4"	6'8"	One	1-3/8"	19-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	Flat	CB	Pine Grain	N/A	•	N/A
2'6"	6'8"	One	1-3/8"	21-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	Flat	CB	Pine Grain	N/A	•	N/A
2'8"	6'8"	One	1-3/8"	23-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	Flat	CB	Pine Grain	N/A	•	N/A
3'0"	6'8"	One	1-3/8"	27-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	Flat	CB	Pine Grain	N/A	•	N/A

REVERSE IS COLONIST 6-PANEL TEXTURE ONLY


MADISON®



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0" 1'2"	6'8" 7'0"	One	1-3/8" 1-3/4"	5-3/8"	3-5/16" (1'0") 4-5/16" (1'2")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
1'3" 1'4" 1'6"	6'8" 7'0"	One	1-3/8" 1-3/4"	7-13/16"	3-9/32" (1'3") 4-3/32" (1'4") 5-3/32" (1'6")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
1'8" 1'10"	6'8" 7'0"	One	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
2'0" 2'2"	6'8" 7'0"	One	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
2'4"	6'8" 7'0"	One	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
2'6"	6'8" 7'0"	One	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
2'8" 2'10"	6'8" 7'0"	One	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
3'0"	6'8" 7'0"	One	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
1'0" 1'2" 1'3" 1'4" 1'6"	8'0"	One	1-3/8" 1-3/4"	7-13/16"	2-3/32" (1'0") 3-3/32" (1'2") 3-19/32" (1'3") 4-3/32" (1'4") 5-3/32" (1'6")	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
1'8" 1'10"	8'0"	One	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
2'0" 2'2"	8'0"	One	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
2'4"	8'0"	One	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
2'6"	8'0"	One	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
2'8" 2'10"	8'0"	One	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
3'0"	8'0"	One	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



MONROE®

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	6"	3"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'2" 1'3"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7-1/2"	3-1/2" (1'2") 3-3/4" (1'3")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'0" 1'2" 1'3" 1'4" 1'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-1/4"	1-3/8" (1'0") 2-3/8" (1'2") 2-7/8" (1'3") 3-3/8" (1'4") 4-3/8" (1'6")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'8" 1'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'0" 2'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'8" 2'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'4" 1'6"	8'0"	Two	1-3/8" 1-3/4"	9-1/4"	3-3/8" (1'4") 4-3/8" (1'6")	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
1'8" 1'10"	8'0"	Two	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
2'0" 2'2"	8'0"	Two	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
2'4"	8'0"	Two	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
2'6"	8'0"	Two	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
2'8" 2'10"	8'0"	Two	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
3'0"	8'0"	Two	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•


BIRKDALE™



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	6"	3"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'2" 1'3"	6'8" 7'0"	Three	1-3/8" 1-3/4"	7-1/2"	3-1/2" (1'2") 3-3/4" (1'3")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'4" 1'6"	6'8" 7'0"	Three	1-3/8" 1-3/4"	9-1/4"	3-3/8" (1'4") 4-3/8" (1'6")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'8" 1'10"	6'8" 7'0"	Three	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'0" 2'2"	6'8" 7'0"	Three	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'6"	6'8" 7'0"	Three	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'8" 2'10"	6'8" 7'0"	Three	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
3'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'0"	8'0"	Three	1-3/8" 1-3/4"	6"	3"	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
1'2" 1'3"	8'0"	Three	1-3/8" 1-3/4"	7-1/2"	3-1/4" (1'2") 3-3/4" (1'3")	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
1'4" 1'6"	8'0"	Three	1-3/8" 1-3/4"	9-1/4"	3-3/8" (1'4") 4-3/8" (1'6")	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
1'8" 1'10"	8'0"	Three	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
2'0" 2'2"	8'0"	Three	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
2'4"	8'0"	Three	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
2'6"	8'0"	Three	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
2'8" 2'10"	8'0"	Three	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
3'0"	8'0"	Three	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



CRAFTSMAN III™

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	4"	4"	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
1'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	6"	4"	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	8-1/4"	3-3/8" (1'3") 3-7/8" (1'4")	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
1'6" 1'8" 1'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	10"	4" (1'6") 5" (1'8") 6" (1'10")	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
2'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	15"	4-1/2"	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
2'2" 2'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	17"	4-1/2" (2'2") 5-1/2" (2'4")	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
2'6" 2'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	21"	4-1/2" (2'6") 5-1/2" (2'8")	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
2'10" 3'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	25"	4-1/2" (2'10") 5-1/2" (3'0")	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•

CONMORE®




Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Five	1-3/8" 1-3/4"	6-25/32"	2-19/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
1'2"	6'8" 7'0"	Five	1-3/8" 1-3/4"	9-1/16"	2-15/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
1'3" 1'4" 1'6" 1'8"	6'8" 7'0"	Five	1-3/8" 1-3/4"	9-11/16"	2-21/32" (1'3") 3-5/32" (1'4") 4-5/32" (1'6") 5-5/32" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Five	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'10") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
2'4"	6'8" 7'0"	Five	1-3/8" 1-3/4"	19-11/16"	4-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
2'6"	6'8" 7'0"	Five	1-3/8" 1-3/4"	21-11/16"	4-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Five	1-3/8" 1-3/4"	23-11/16"	4-5/32" (2'8") 5-5/32" (2'10")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
3'0"	6'8" 7'0"	Five	1-3/8" 1-3/4"	25-11/16"	5-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
1'0"	8'0"	Five	1-3/8" 1-3/4"	6-25/32"	2-19/32"	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
1'2"	8'0"	Five	1-3/8" 1-3/4"	9-1/16"	2-15/32"	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
1'3" 1'4" 1'6" 1'8"	8'0"	Five	1-3/8" 1-3/4"	9-11/16"	2-21/32" (1'3") 3-5/32" (1'4") 4-5/32" (1'6") 5-5/32" (1'8")	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
1'10" 2'0" 2'2"	8'0"	Five	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'10") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
2'4"	8'0"	Five	1-3/8" 1-3/4"	19-11/16"	4-5/32"	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
2'6"	8'0"	Five	1-3/8" 1-3/4"	21-11/16"	4-5/32"	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
2'8" 2'10"	8'0"	Five	1-3/8" 1-3/4"	23-11/16"	4-5/32" (2'8") 5-5/32" (2'10")	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
3'0"	8'0"	Five	1-3/8" 1-3/4"	25-11/16"	5-5/32"	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO

\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.




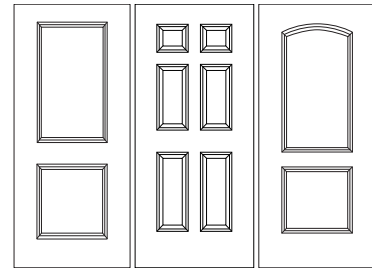

COMMERCIAL WIDE STILE

CAMBRIDGE™, COLONIST® AND CONTINENTAL™

Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
3'0" Cambridge™ Beaded	6'8" 7'0"	Two	1-3/8" 1-3/4"	23"	6-1/2"	N/A	4-7/16" (6'8") 6-1/4" (7'0")	6-3/8"	11-11/16" (6'8") 13-7/8" (7'0")	O	Smooth	N/A	•	N/A
3'0" Colonist®	6'8" 7'0"	Six	1-3/8" 1-3/4"	9-5/8"	6-1/2"	3-3/4"	5-7/8" (6'8") 7-7/8" (7'0")	6-3/4"	10-5/8" (6'8") 12-5/8" (7'0")	CB	Smooth	N/A	•	N/A
3'0" Continental™	6'8" 7'0"	Two	1-3/8" 1-3/4"	24"	6"	N/A	5-1/4" (6'8") 7-1/4" (7'0")	4-3/16"	10-13/16" (6'8") 12-13/16" (7'0")	O	Smooth	N/A	•	N/A



BIFOLDS

Door Design	Heights*	No. of Panels	Thickness	Widths* 2 doors or 1 unit	Widths* 4 doors or 2 units
Caiman®	6'7"; 6'11"; 7'11"	4	1-3/8"	1'10"; 2'0"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Cambridge™	6'7"; 6'11"; 7'11"	4	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Camden®	6'7"; 6'11"	4	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Carrara®	6'7"; 6'11"; 7'11"	4	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Colonist®	6'7"; 6'11"; 7'11"	6	1-3/8"	1'6"; 1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'0"; 3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Conmore®	6'7"; 6'11"	10	1-3/8"	1'10"; 2'0"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Craftsman III™	6'7"; 6'11"	4	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Madison®	6'7"; 6'11"; 7'11"	2	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Monroe®	6'7"; 6'11"; 7'11"	4	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Rockport™	6'7"; 6'11"; 7'11"	10	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Santa Fe™	6'7"; 6'11"; 7'11"	4	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Birkdale™	6'7"; 6'11"; 7'11"	6	1-3/8"	1'6"; 1'8"; 1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'0"; 3'4"; 3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"




## FLUSH INTERIOR DOOR

### SIMPLICITY AND RELIABILITY MEET


Our flush interior doors are offered in a variety of colors and woodgrains. They are built to endure everyday life, so you can be confident in their durability. All flush interior doors are available with ProCore The Quiet Door® construction, reducing sound transmission.

# FLUSH DOOR OPTIONS


## AVAILABLE SIZES



16 WIDTHS BETWEEN 1'0" - 4'0"




HEIGHTS OF 6'8", 7'0" OR 8'0"



THICKNESSES OF 1-3/8" OR 1-3/4"

## CORE OPTIONS




### PROCORE® SOLID CORE

Wood or MDF frame



20-minute fire rating

**PROCORE**  
THE QUIET DOOR®




### SOLID MINERAL CORE

Mineral composite frame



90-minute fire rating



### HOLLOW CORE

Combination wood/MDF frame

Corrugated honeycomb cell core

# FINISHING OPTIONS

You choose whether your flush door arrives unfinished, primed and/or embossed. Or let us paint your door for you; our factory finish process saves you time and creates a more durable finish than an at-home paint job.

## UNFINISHED HARDWOOD VENEER

Choose from several species. Check with your dealer for availability.



Sliced Red Oak  
Slab and Bifold



Rotary-Cut Birch  
Slab and Bifold




Hardwood  
Slab and Bifold

Doors are for interior applications only.



## PRIMED AND EMBOSSED HARDWOOD

Primed options arrive ready to paint. Embossed doors offer the look of real stained wood.



Primed



Imperial Oak  
Embossed



\*1-Year Factory Applied Prefinish Warranty. See [jeld-wen.com](http://jeld-wen.com) for details.

Actual colors may vary from samples shown due to printing process and/or differing monitor calibrations.

## PAINTED \*

Fresh colors add character to your spaces. Whether you prefer light or dark, there's a color for you. Select from 33 hues.



## FLUSH INTERIOR DOOR FEATURES

Doors	Thickness	Core	Stiles	Top and Bottom Rails	Lock Block	Construction	Standards
<b>Particleboard Core Doors</b>	1-3/8" 1-3/4"	Solid particleboard, mat-formed wood particleboard with density of approximately 28 lbs./cu ft. Meets or exceeds all industry requirements, including ANSI A 208.1, 1-LD-1 or 1-LD-2.	15/16" stile for 1-3/8" thick  1-1/16" stile for 1-3/4" thick	7/8" top rail and 2" bottom rail for 1-3/8" Thick  1" top rail and 2-1/4" bottom rail for 1-3/4" Thick	n/a	5-ply when using 2-ply hardwood faces.	Warnock Hersey International approved to fire endurance tests (1-3/4" only). WHI is an approved ICBO quality control agency.
<b>Hollow Core Doors</b>	1-3/8"	Expanded corrugated honeycomb to provide rigid strength.	15/16"	7/8" top rail and 2" bottom rail	3-1/2" x 16" both sides	5-ply when using 2-ply hardwood faces.	n/a
<b>20-Minute Fire Doors (Neutral Pressure)</b>	1-3/4"	Solid particleboard, mat-formed wood particleboard with density of approximately 28 lbs./cu ft. Meets or exceeds all industry requirements, including ANSI A 208.1, 1-LD-1 or 1-LD-2.	1-3/4"	1-3/4"	n/a	5-ply when using 2-ply hardwood faces.	Warnock Hersey International approved to fire endurance tests. WHI is an approved ICBO quality control agency.
<b>90-Minute Fire Doors (Neutral Pressure)</b>	1-3/4"	Homogeneous mineral non-asbestos. Meets or exceeds all industry requirements.	1-5/16" composite stile with 5/16" wood band.	1-3/4"	n/a	5-ply when using 2-ply hardwood faces.	Warnock Hersey International approved to fire endurance tests. WHI is an approved ICBO quality control agency.




## STUDIO™ COLLECTION

### CONTEMPORARY INTERIOR DOORS

The Studio™ Collection brings a new perspective to the interior door. Highlighting accent details on smooth surfaces, these doors present a distinct look.

# STUDIO™ DOOR OPTIONS


## AVAILABLE SIZES



10 WIDTHS BETWEEN 1'0" - 3'0"




HEIGHTS OF 6'8" OR 7'0"



THICKNESSES OF 1-3/8" OR 1-3/4"

## CORE OPTIONS




### PROCORE® SOLID CORE

Wood or MDF frame



20-minute fire rating

**PROCORE**  
THE QUIET DOOR®



### HOLLOW CORE

Combination wood/MDF frame

Corrugated honeycomb cell core


Not recommended for use with double door or bifold door applications due to alignment issues.

# FINISHING OPTIONS

Choose the stain or paint that suits your style. We'll do the work. Our factory finish process saves you time and creates a more durable finish than an at-home paint job.

## PAINTED \*

Fresh colors add character to your spaces. Whether you prefer light or dark, there's a color for you. Select from 33 hues.



Modern White



Brilliant White



Fog



Graphite



Granite



Slate



Black



Ash



Driftwood




Linen



Flagston



Timber Gray



French Vanilla



Bisque



Desert Sand



Pottery



Dark Chocolate



Chestnut Bronze



Cranberry



Mesa Red



Currant



Surf



Evergreen



Hartford Green



Serenity



Colony



Revival Blue



Eclipse



Marine



Caribbean Blue



Blue Heron



Persimmon




Marigold


## STATEMENT™ COLLECTION \*

Statement™ Collection finishing delivers an artisan, hand-brushed effect.

On-trend colors and texture blend for a beautiful appearance.



Black Cherry



Denim



Juniper



Saffron



Stone

\*1-Year Factory Applied Prefinish Warranty. See [jeld-wen.com](http://jeld-wen.com) for details.


Actual colors may vary from samples shown due to printing process and/or differing monitor calibrations.



# STUDIO™ COLLECTION



SL100  
Molded  
6'8" & 7'0"  
Product Details pg. 34




SL130  
Molded  
6'8"  
Product Details pg. 35

Not recommended for use with double door or bifold door applications due to alignment issues.



# PRODUCT DETAIL



## SL100

Width	Height	Thickness	Groove Width	Horizontal Grooves	No. of Panels	Panel Height	Head Height	Head Width	No. of Vertical Stripes	No. of Horizontal Stripes	Stripe Width
1'6"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
1'8"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
1'10"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'0"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'2"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'4"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'6"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'8"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'10"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
3'0"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
1'6"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
1'8"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
1'10"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'0"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'2"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'4"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'6"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'8"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'10"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
3'0"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A



SL130

Width	Height	Thickness	Groove Width	No. of Vertical Grooves	Horizontal Grooves	No. of Stiles	Stile Width	No. of Panels	Panel Height	Head Height	Head Width	No. of Vertical Stripes	No. of Horizontal Stripes	Stripe Width
1'6"	6'8"	1-3/8"	1/8"	1	3	1	5"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
1'8"	6'8"	1-3/8"	1/8"	1	3	1	5"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
1'10"	6'8"	1-3/8"	1/8"	1	3	1	5"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
2'0"	6'8"	1-3/8"	1/8"	1	3	1	5"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
2'2"	6'8"	1-3/8"	1/8"	1	3	1	5"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
2'4"	6'8"	1-3/8"	1/8"	1	3	1	5"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
2'6"	6'8"	1-3/8"	1/8"	1	3	1	5"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
2'8"	6'8"	1-3/8"	1/8"	1	3	1	6"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
2'10"	6'8"	1-3/8"	1/8"	1	3	1	6"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
3'0"	6'8"	1-3/8"	1/8"	1	3	1	6"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A



## TRIA™

### ELEGANT WOOD COMPOSITE DOORS


TRIA™ doors present so many design possibilities. Options include carved, clean lines and architectural details. You can even design your own. Their construction helps them stand up to everyday life, and their core works hard to keep noise from traveling. TRIA doors add charm to any room.

# TRIA™ DOOR OPTIONS

## STICKING PROFILES


### C-SERIES

Seamless, solid surface with raised panels and two etched profile choices



#### STANDARD

A wider groove for a traditional look and style




#### OGEE

A narrower groove for a sleeker and slimmer detail


### L-SERIES

Square profiles with true shadow lines and Shaker panel design



#### NO STICKING

A wider groove for a traditional look and style




#### SQUARE STICKING

A narrower groove for a sleeker and slimmer detail


### R-SERIES

Three molding options with real inlaid pieces and precision detailing




#### STANDARD

Standard molding profile



#### ARCHITECTURAL

A more intricate molding profile




#### DESIGNER


A more modern profile design

# TRIA™ DOOR OPTIONS


## AVAILABLE SIZES



WIDTHS BETWEEN 1'0" - 4'0"




HEIGHTS OF 6'8", 7'0" OR 8'0"



THICKNESSES OF 1-3/8" OR 1-3/4"


## CORE OPTIONS



### FOAM CORE

Wood frame

Available only in the C-Series




### FIRE CORE

Wood frame

Available in C, L and R-Series



20-, 60- and 90-minute fire rating



### SOLID CORE

Wood frame

Available in C, L and R-Series




20-minute fire rating


## SPECIALTY INSERT OPTIONS

- Chalkboard
- Dry erase
- Mirror
- Glass


## MOST POPULAR C-SERIES/R-SERIES/L-SERIES DESIGN OPTIONS




C2020  
R2020  
L2020  
6'8", 7'0" & 8'0"




C2030  
R2030  
L2030  
6'8", 7'0" & 8'0"




C2030V  
6'8", 7'0" & 8'0"




C2040  
R2040  
6'8", 7'0" & 8'0"




C2050  
R2050  
6'8", 7'0" & 8'0"




C3000  
R3000  
L3000  
6'8", 7'0" & 8'0"




C3070  
R3070  
L3070  
6'8", 7'0" & 8'0"




C3240  
R3240  
L3240  
6'8", 7'0" & 8'0"




C3340  
R3340  
6'8", 7'0" & 8'0"



C4100  
R4100  
L4100  
6'8", 7'0" & 8'0"




C5000  
R5000  
L5000  
6'8", 7'0" & 8'0"




C1000  
R1000  
L1000  
6'8", 7'0" & 8'0"

SERIES: C = RAISED PANEL, R = RAISED MOLDING, V = V-GROOVES, L = FLAT PANEL


## C-SERIES / R-SERIES DESIGN OPTIONS




C1000 ■  
R1000†◆




C1010  
R1010




C1020  
R1020




C1030  
R1030




C1040  
R1040




C1050  
R1050




C2000 ◆  
R2000◆




C2010  
R2010




C2020 ◆  
R2020◆




C2030  
R2030




C2040  
R2040




C2050  
R2050




C2070  
R2070




C2080  
R2080



C2090  
R2090




C2130  
R2130




C2140  
R2140




C2160  
R2160




C2200  
R2200




C2210  
R2210




C3000 ◆  
R3000◆




C3010  
R3010




C3020  
R3020




C3040  
R3040




C3050  
R3050




C3060  
R3060




C3070 ◆  
R3070◆




C3090  
R3090




C3100  
R3100




C3110  
R3110




C3150  
R3150




C3160  
R3160




C3170  
R3170




C3180  
R3180




C3190  
R3190




C3200  
R3200




C3210  
R3210




C3220  
R3220




C3230  
R3230




C3240  
R3240




C3250  
R3250




C3260  
R3260




C3270  
R3270




C3300  
R3300




C3310  
R3310




C3340  
R3340




C4000  
R4000




C4010  
R4010




C4020  
R4020




C4030  
R4030




C4050  
R4050




C4060  
R4060




C4070  
R4070




C4080  
R4080




C4090  
R4090




C4100 ◆  
R4100◆




C4110  
R4110



C4120  
R4120




C4130  
R4130



C4140  
R4140



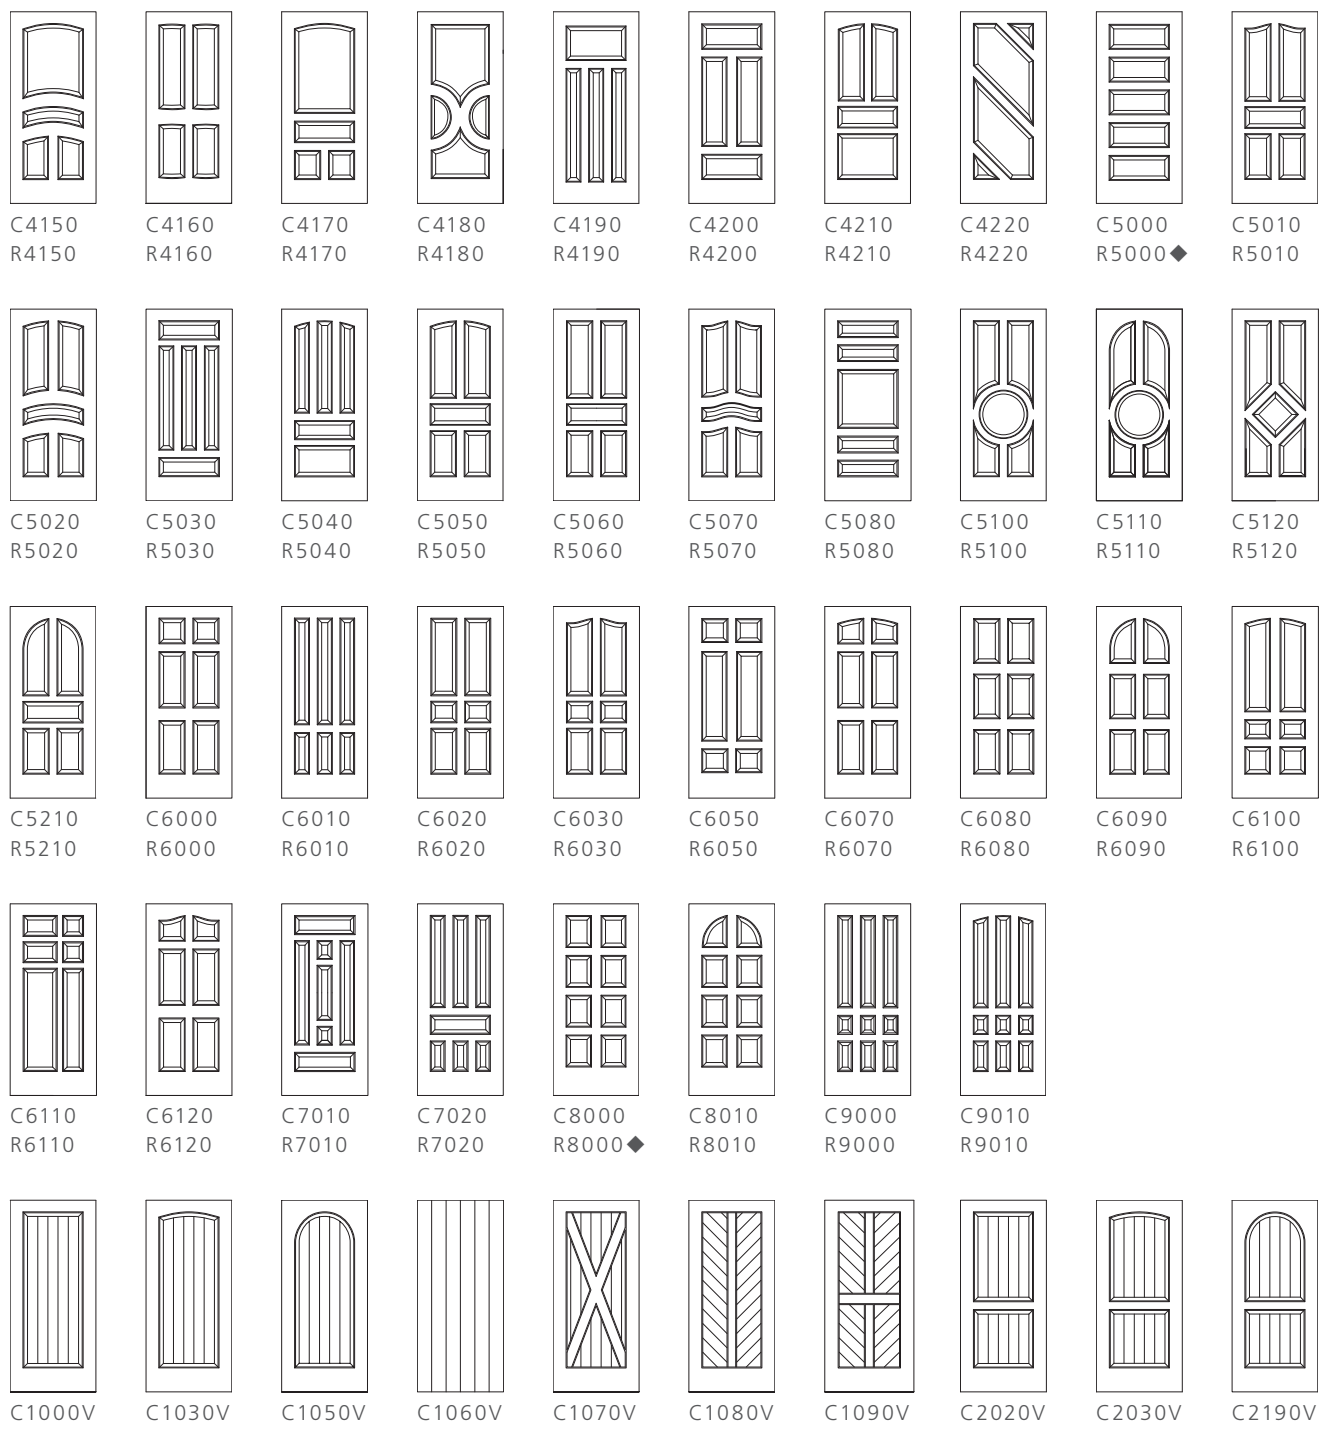

R-Series architectural and designer raised moldings only available in 1-3/4" doors, and not available in all radius, eyebrow or reverse designs  
 Bifold doors (flat back inside) available in all designs except C9000 and R3310


■ Chalkboard, dry erase and mirror specialty inserts are available in C1000 design (with a small bottom panel added) on the reverse side of any C-Series door design in 6'8" and 8'0"

† Mirror specialty insert is available in R1000 design (with a small bottom panel added) on the reverse side of any R-Series door design in 1-3/8" and 1-3/4" in 6'8" and 8'0"


◆ Glass options are available in R-Series in 1-3/8" and 1-3/4" in 6'8", 7'0" and 8'0"

**SERIES: C = RAISED PANEL, R = RAISED MOLDING, V = V-GROOVES**


## L-SERIES DESIGN OPTIONS




L1000 ■◆




L2000 ◆




L2020 ◆




L3000 ◆




L3010




L3060 ◆




L3070




L3100




L3190




L3220




L3240




L3250




L4000




L4060




L4100 ◆



L4110




L4140




L4200




L5000 ◆




L5030



L5060




L5080




L6000




L6010




L6020




L6050




L6080




L6110




L7010



L7020



L8000 ◆



L9000


Bifold doors (flat back inside) available in all designs except L9000

■ Chalkboard, dry erase and mirror specialty inserts are available in L1000 design (with a small bottom panel added) on the reverse side of any L-Series door design in 6'8" and 8'0"

◆ Glass options are available in L-Series in 1-3/8" and 1-3/4" in 6'8", 7'0" and 8'0"

SERIES: L = FLAT PANEL



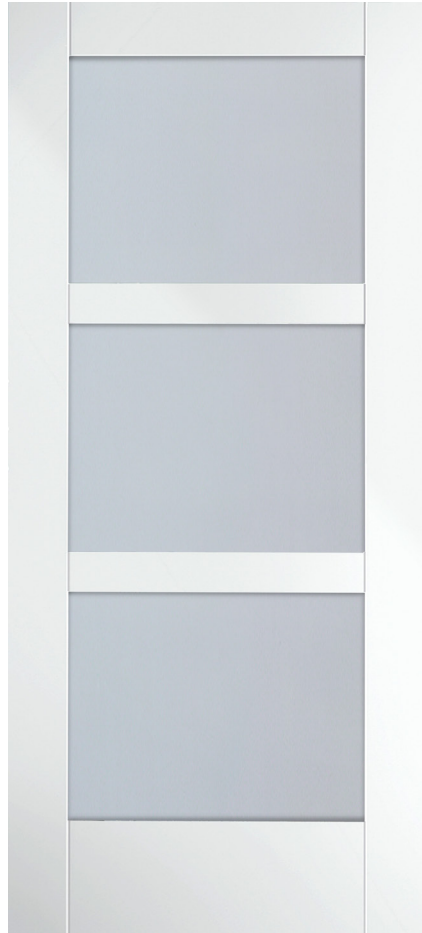


## MODA®


The MODA® Collection of interior doors plays up simplicity and clean lines. Choose from 21 unique styles with solid, translucent glass, mirror or clear glass panel options. MODA doors are an excellent way to add sophistication to any space. Conceal or reveal with MODA doors. Regardless of the panel configuration you choose, MODA doors allow you to create a consistent look throughout your home.

# MODA® DOOR OPTIONS


## PANEL OPTIONS




SOLID PANEL



CLEAR GLASS




TRANSLUCENT GLASS



MIRROR

A full lite mirror on one side and your choice of 21 panel options on the opposite side\*

## STICKING PROFILES




FLAT PANEL

## FINISH OPTIONS




PRIMED




RUSTIC

## AVAILABLE SIZES


10" bottom rail is ADA-compliant and comes standard. Custom sizes available.



6 WIDTHS BETWEEN 1'6" - 3'0"




HEIGHTS OF 6'8" OR 8'0"



THICKNESS OF 1-3/8"  
RAIL WIDTHS IN 2" OR 3-5/8"

## CORE OPTIONS



SOLID CORE


All-wood frame




20-minute  
fire rating

\*Mirror available on panel door only. No design option available over mirror.  
Additional lead times required.


## DESIGN OPTIONS




PMC1011  
PMP1011  
PMT1011  
6'8" & 8'0"



PMC1023  
PMP1023  
PMT1023  
6'8" & 8'0"




PMC1023N  
PMP1023N  
PMT1023N  
6'8" & 8'0"




PMC1024  
PMP1024  
PMT1024  
6'8" & 8'0"




PMC1024N  
PMP1024N  
PMT1024N  
6'8" & 8'0"




PMC1031  
PMP1031  
PMT1031  
6'8" & 8'0"




PMC1031N  
PMP1031N  
PMT1031N  
6'8" & 8'0"




PMC1032  
PMP1032  
PMT1032  
6'8" & 8'0"




PMC1033  
PMP1033  
PMT1033  
6'8" & 8'0"



PMC1035  
PMP1035  
PMT1035  
6'8" & 8'0"




PMC1035N  
PMP1035N  
PMT1035N  
6'8" & 8'0"




PMC1036  
PMP1036  
PMT1036  
6'8" & 8'0"


PMP = PANEL, PMT = TRANSLUCENT, PMC = CLEAR




PMC1036N  
PMP1036N  
PMT1036N  
6'8" & 8'0"




PMC1044  
PMP1044  
PMT1044  
6'8" & 8'0"




PMC1044N  
PMP1044N  
PMT1044N  
6'8" & 8'0"




PMC1055  
PMP1055  
PMT1055  
6'8" & 8'0"




PMC1055N  
PMP1055N  
PMT1055N  
6'8" & 8'0"



PMC1066  
PMP1066  
PMT1066  
6'8" & 8'0"



PMC1066N  
PMP1066N  
PMT1066N  
6'8" & 8'0"



PMC1071  
PMP1071  
PMT1071  
6'8" & 8'0"



PMC1072  
PMP1072  
PMT1072  
6'8" & 8'0"



## AUTHENTIC WOOD

### RICH BEAUTY IN EVERY STYLE

Authentic wood doors showcase warmth and elegance. They elevate the sophistication of any room. Choose from a variety of wood species, panel configurations and glass options for a customized look.



# AUTHENTIC WOOD DOOR OPTIONS

## WOOD SPECIES

We offer a variety of wood species to match the look you want for your home. Receive your door primed to add your own paint color.



Primed



Sustainable  
Pine



Sustainable  
Knotty Pine



Knotty Alder




Oak


Additional species available via special order. Contact your JELD-WEN sales representative for more details.

## STICKING PROFILES


Choose from traditional or contemporary sticking profiles.




1/2" FLAT PANEL  
PROFILE P, O




3/4" DOUBLE-HIP  
RAISED PANEL KA




3/4" DOUBLE-HIP  
RAISED PANEL PROFILE SP




3/4" SINGLE-HIP  
RAISED PANEL PROFILE O



3/4" V-GROOVE PANEL KA




9/16" SINGLE-HIP  
RAISED PANEL PROFILE KP




9/16" V-GROOVE  
PANEL PROFILE KP


## AVAILABLE SIZES



6 WIDTHS BETWEEN 1'0" - 3'0"




HEIGHTS OF 6'8" OR 8'0"




THICKNESS OF 1-3/8"


## RAISED PANEL




0022 KA  
6'8" & 8'0"




0028 SP, KA, O  
6'8" & 8'0"



0044 SP  
6'8" & 8'0"



0066 SP, KP, O  
6'8" & 8'0"




0028V KA  
6'8" & 8'0"  
V-Groove


Additional designs available via special order. Contact your JELD-WEN sales representative for more details.

SPECIES: P = PRIMED, SP = SUSTAINABLE PINE, O = OAK, KP = KNOTTY PINE, KA = KNOTTY ALDER


## FLAT PANEL




1011 P  
6'8" & 8'0"




1022 P  
6'8" & 8'0"




1033 P, O  
6'8" & 8'0"




1035 P  
6'8" & 8'0"



1055 P  
6'8" & 8'0"




0028V KP, KA  
6'8" & 8'0"  
V-Groove




0022V KP  
6'8" & 8'0"  
V-Groove


## LOUVERS



0730P P  
6'8" & 8'0"  
Plantation  
2-1/4" Slats




0732P P  
6'8" & 8'0"  
Plantation  
2-1/4" Slats




0730 P, SP  
6'8" & 8'0"  
Traditional  
1-1/4" Slats

# FRENCH DOORS


Door designs available with clear glass only.




1501 P, SP  
6'8" & 8'0"




1509 P, SP  
6'8" & 8'0"




1510 P, SP, O  
6'8" & 8'0"




1505 P, SP  
6'8" & 8'0"




1515 P, SP, O  
(2'4" TO 3'0")  
6'8" & 8'0"



1512 P, SP  
6'8" & 8'0"





1506 P, SP  
6'8" & 8'0"





1518 P, SP  
6'8" & 8'0"

SPECIES: P = PRIMED, SP = SUSTAINABLE PINE, O = OAK DOORS

## DECORATIVE GLASS SELECTIONS

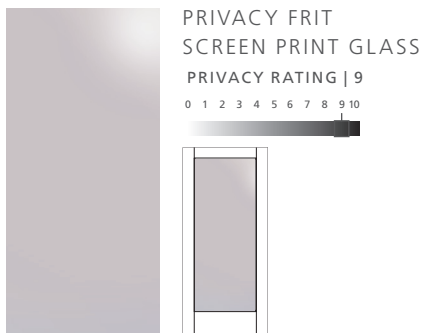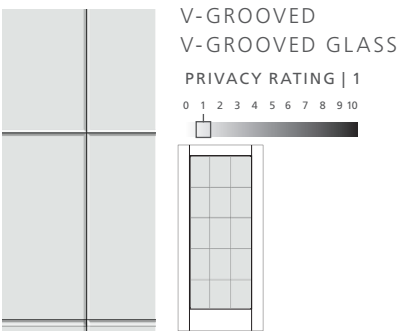

## DECORATIVE GLASS DOORS





Proudly Supplied By



615-885-0355 | [www.warrenbros.com](http://www.warrenbros.com)