



STEEL ENTRY DOORS
PRODUCT GUIDE

THE TAYLOR ADVANTAGE

We are dedicated to providing you with long lasting, quality products, leading-edge product innovation, and exceptional customer service.

SELECTION

- Wood-edge
- Steel-edge
- Fiberglass
- Available in a variety of textures and styles

COMPLIANCE


- Fire rated
- Texas Dept. of Insurance (TDI)
- ENERGY STAR
- Florida FBC
- ADA
- STC
- NFRC

CAPABILITY

- Custom width and heights
- Special face and edge preps
- Slabs or pre-hung
- Steel or wood frame
- Hinge and bore locations to your specs

AVAILABILITY

- Additional sizes & profiles available (*with extended lead time*)
- No order minimums

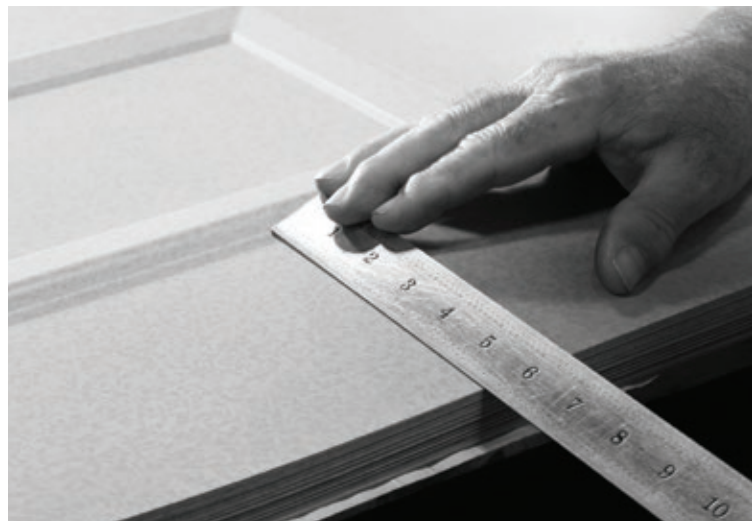

PROJECT TYPES

At Taylor Entrance Systems™, we use only top-quality materials to help bring your vision to life. We have a wide range of styles and textures to meet your architectural style or design needs. Taylor offers the perfect door solutions for multi-family and light commercial projects. We can provide you what you need, when you need it.

Shown: Grand Marais
1-Panel Shaker in Smooth





LET TAYLOR ENTRANCE SYSTEMS™ be a part of your next project

- ✓ Residential Living
- ✓ Office Buildings
- ✓ Hotel and Hospitality
- ✓ Multi-family
- ✓ Student Housing
- ✓ Assisted Living
- ✓ Hospitals and Clinics
- ✓ Places of Worship
- ✓ Financial Institutions
- ✓ Warehouses
- ✓ Manufacturing Facilities
- and more...



Shown: Cambridge Smooth Steel
6-Panel Horizontal in 8/0 height

STEEL

DOOR COLLECTIONS



8
CAMBRIDGE
SMOOTH STEEL



12
WESTGUARD
20-GAUGE STEEL



14
TRUGRAIN
PRE-FINISHED STEEL



16
NORWOOD
STAINABLE STEEL




18
TRUKOTE
PRE-FINISHED STEEL



20
EDGEWOOD
WOOD-EDGE STEEL

BUILT IN ADVANTAGES

Quality entrance systems start with quality components. Our steel door collections are made-to-order and built by talented craftspeople in West Branch, Michigan. We source American-made steel, guaranteeing quality and performance for years to come.

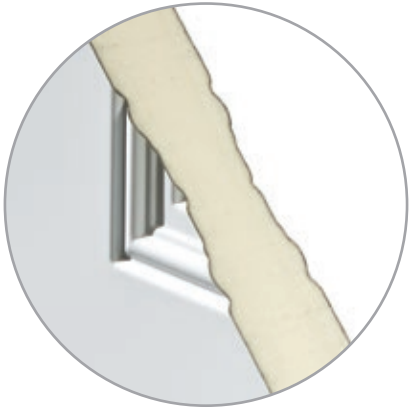

POLYURETHANE FOAM CORE

Polyurethane foam enhances sound proofing and has insulation properties that are at least four times greater than wood doors. The foam also acts as a bonding agent, locking all internal components in place for enhanced durability.



GRADE 40
SECURITY
RATING

FULL STEEL-EDGE PERIMETER

Our steel-edge doors receive the highest rating possible in the industry's toughest forced entry test. A door must withstand the force beyond seven hits from a 100 pound test weight to achieve a Grade 40 rating.



REINFORCED LOCK BLOCK AREA

Steel doors are constructed with a composite lock block to provide secure mounting of door hardware and better structural integrity. The reinforced lock area offers more screw-holding power than wood.



ADJUSTABLE HINGE PLATE

This one-of-a-kind hinge plate is built into our slab, allowing the door to be easily adjusted in any direction without removing it from the frame. Adjustments can be made with a screwdriver at any time.

CAMBRIDGE

SMOOTH STEEL COLLECTION




The Cambridge Collection is designed for strength, security and durability. This premium collection resists cracking, splitting, warping, twisting, rotting, and corrosion. Choose from our largest selection of door styles that range from traditional to modern to complement nearly any project type.

- Constructed out of 22- or 24-gauge hot-dip galvanized steel
- Full steel-edge perimeter grants an industry-leading Grade 40 Security Rating
- 20-gauge hinge reinforcements
- Polyurethane foam inner core provides superior insulation
- 90-minute fire rated
- Equipped with the Adjustable Hinge Plate System (*optional*)
- Baked-on polyester primer accepts exterior grade latex paint
- 10" ADA bottom rail available
- Limited Lifetime Warranty on 22-gauge steel, 10-Year Limited Warranty on 24-gauge steel *
- Available prehung, KD, or slab only (*wood or steel jambs*)

AVAILABILITY (24-GAUGE STEEL)

FLUSH ★

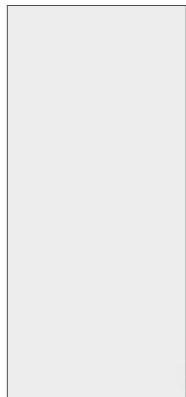

ADA 90 ru

H 6'8" 7'0" 8'0"
W 2'0" 2'2" 2'4"
2'6" 2'8" 2'10"
3'0" 3'2" 3'4" 3'6"

3'2", 3'4", and 3'6" widths not
available in 8'0" height

1-PANEL HD



ADA 90 ru

H 6'8" 7'0"
W 2'8" 2'10" 3'0"

2-PANEL HD ★



ADA 90 ru

H 6'8" 7'0" 8'0"
W 2'6" 2'8" 2'10"
3'0"

2'6" width available only with
single bore prep at standard
location; 2'6" width not
available in 8'0" height

2-PANEL HD
ARCH TOP ★

ADA 90 ru

H 6'8" 7'0"
W 2'8" 2'10" 3'0"

2-PANEL HD
ARCH TOP
PLANK

90 ru

H 6'8"
W 2'8" 2'10" 3'0"

2-PANEL HD
COTTAGE

90 ru

H 6'8"
W 2'8" 2'10" 3'0"

3/4 2-PANEL
SQUARE TOP HD

ADA 90 ru

H 6'8" 7'0"
W 2'8" 2'10" 3'0"

3-PANEL HD ★



90 ru

H 6'8"
W 2'8" 2'10" 3'0"

3-PANEL HD
CRAFTSMAN

ADA 90 ru

H 6'8" 7'0"
W 2'8" 2'10" 3'0"

CROSSBUCK



ADA 90 ru

H 6'8" 7'0"
W 2'6" 2'8" 2'10"
3'0"

4-PANEL BLANK
TOP HD ★

ADA 90 ru nf

H 6'8" 7'0"
W 2'6" 2'8" 2'10"
3'0"

TRUE 4-PANEL



ADA 90 ru

H 6'8" 7'0"
W 2'6" 2'8" 2'10"
3'0"

2'6" width available only with
single bore prep at standard
location; 2'6" width not
available in 7'0" height

5-PANEL
HORIZONTAL

ADA 90 ru

H 6'8" 7'0"
W 2'8" 2'10" 3'0"

6-PANEL HD* ★



ADA 90 ru nf

H 6'8" 7'0" 8'0"
W 2'6" 2'8" 2'10"
3'0"

* 8'0" height only available
with standard embossment

8-PANEL ★



ADA 90 ru

H 6'8" 7'0"
W 2'8" 2'10" 3'0"




















9-PANEL



ADA 90 ru

H 6'8" 7'0"
W 2'8" 2'10" 3'0"

AVAILABILITY (22-GAUGE STEEL)

FLUSH ★  ADA ♠90 ru H 6'8" 7'0" 8'0" W 2'0" 2'2" 2'4" 2'6" 2'8" 2'10" 3'0" 3'2" 3'4" 3'6" <small>3'2", 3'4", and 3'6" widths not available in 8'0" height</small>	1-PANEL HD  ADA ♠90 ru H 6'8" W 2'8" 2'10" 3'0"	1-PANEL FLAT SHAKER  ADA ♠90 ru H 6'8" 7'0" 8'0" W 2'8" 2'10" 3'0"	2-PANEL HD ★  ADA ♠90 ru H 6'8" 7'0" 8'0" W 2'6" 2'8" 2'10" 3'0" <small>2'6" width available only with single bore prep at standard location; 2'6" width not available in 8'0" height</small>	2-PANEL FLAT SHAKER  ADA ♠90 ru H 6'8" 7'0" 8'0" W 2'8" 2'10" 3'0"	2-PANEL HD ARCH TOP ★  ♠90 ru H 6'8" W 2'8" 2'10" 3'0"	2-PANEL HD ARCH TOP PLANK  ♠90 ru H 6'8" W 2'8" 2'10" 3'0"
3/4 2-PANEL SQUARE TOP HD  ADA ♠90 ru H 6'8" 7'0" W 2'8" 2'10" 3'0"	2-PANEL HD COTTAGE  ♠90 ru H 6'8" W 2'8" 2'10" 3'0"	3-PANEL HD ★  ADA ♠90 ru H 6'8" 7'0" W 2'6" 2'8" 2'10" 3'0" <small>2'6" width not available in 7'0" height</small>	3-PANEL HD CRAFTSMAN  ADA ♠90 ru H 6'8" 7'0" W 2'8" 2'10" 3'0"	3-PANEL FLAT SHAKER  ADA ♠90 ru H 6'8" 7'0" W 2'8" 2'10" 3'0"	CROSSBUCK  ADA ♠90 ru H 6'8" 7'0" W 2'6" 2'8" 2'10" 3'0"	
4-PANEL BLANK TOP HD ★  ADA ♠90 ru nf H 6'8" 7'0" W 2'6" 2'8" 2'10" 3'0" <small>7'0" height only available in 2'6" width</small>	TRUE 4-PANEL ★  ADA ♠90 ru H 6'8" 7'0" W 2'6" 2'8" 2'10" 3'0" <small>2'6" width available only with single bore prep at standard location</small>	5-PANEL HORIZONTAL  ADA ♠90 ru H 6'8" 7'0" 8'0" W 2'8" 2'10" 3'0" <small>8'0" height has a 6-panel embossment</small>	6-PANEL HD ★  ADA ♠90 ru nf H 6'8" 7'0" W 2'6" 2'8" 2'10" 3'0" 3'4" 3'6" <small>3'4" and 3'6" widths not available in 7'0" height</small>	8-PANEL ★  ADA ♠90 ru H 6'8" 7'0" W 2'8" 2'10" 3'0"	9-PANEL  ADA ♠90 ru H 6'8" 7'0" W 2'8" 2'10" 3'0"	

Availability is subject to change. ★ = matching sidelite available

ru = remodeler under-size units available

nf = 2'6" width available in narrow format only



EXPLORE

NEW HEIGHTS

8' DOOR STYLES

The Cambridge Smooth Steel Collection offers a variety of door styles designed to complement nearly any architectural style.

Today's trends are demanding larger than life openings with understated details. The simple and clean design of the 1-Panel and 2-Panel Flat Shaker styles make them the perfect, modern solution for large openings.

Shown: 1-Panel Flat Shaker in 8'0 height

FLUSH



△90 ru

H 8'0"
W 2'0" 2'2" 2'4"
2'6" 2'8" 2'10"
3'0"

1-PANEL FLAT SHAKER



△90

H 8'0"
W 2'8" 2'10" 3'0"

2-PANEL FLAT SHAKER



△90

H 8'0"
W 2'8" 2'10" 3'0"

2-PANEL HD



△90

H 8'0"
W 2'8" 2'10" 3'0"

6-PANEL HORIZONTAL



△90

H 8'0"
W 2'8" 2'10" 3'0"

6-PANEL STD



△90

H 8'0"
W 2'6" 2'8" 2'10"
3'0"

CUSTOM CAPABILITIES

At Taylor, we don't just build doors, we customize them. Our steel and fiberglass exterior doors are customized to fit your spec, including sized to fit hollow metal frames and prepped to accept virtually any locking hardware. Choose Taylor's custom door solutions for your next multi-family or commercial project.



CUSTOM HARDWARE PREP

Taylor's one-of-a-kind, state-of-the-art equipment has the capability to do virtually any lock, face bore, or edge prep that a commercial or residential job may require. Give us the template, we'll make the door.

- Custom face and edge preps on fiberglass, steel- and wood-edge steel doors
- Special lock preps
- Custom bore locations to your specs
- Closer and panic bar prep



HINGE PREP

Does your project require custom hinge locations? Taylor offers a variety of hinge preps to fit your project specs.



STANDARD 4" NON-
TEMPLATE HINGE PREP



STANDARD 4" ADJUSTABLE
NON-TEMPLATE HINGE PREP



4" TEMPLATE
HINGE PREP



4-1/2" COMMERCIAL
TEMPLATE HINGE PREP

CAMBRIDGE SERIES

The Cambridge Series is your gateway to unparalleled strength, security, and style. This premium, 22-gauge smooth steel door defends against damage and corrosion. With an extensive range of door styles, from timeless classics to contemporary designs, you can find the perfect match for any project. These doors offer Grade 40 security, ensuring peace of mind and enhanced protection against forced entries.

STANDARD SPECIFICATIONS	
FACE MATERIAL	G40 hot-dipped galvanized steel skin
SKIN GAUGE	22-gauge
SKIN SURFACE	Smooth
FINISH	Baked-on polyester primer
CORE MATERIAL	Injected polyurethane foam core
EDGE CONSTRUCTION	Full steel-edge perimeter
THICKNESS	1.720" (nominal 1-3/4")
LOCK BLOCK	Composite lock block
HINGE REINFORCEMENTS	20-gauge fixed hinge reinforcement
HINGE PREP	4" surface mount, fixed hinge prep

WARRANTY	
COMMERCIAL	Limited 7-Year Warranty *
RESIDENTIAL	Limited Lifetime Warranty *

*Refer to full warranty for details.

AVAILABLE OPTIONS	
HINGE PREP	4" surface mount, fixed hinge prep 4" surface mount, adjustable hinge 4" surface mount, template fixed hinge 4-1/2" surface mount, commercial template fixed hinge
CLOSER PREP	Steel closer reinforcement plates
PANIC PREP	Exit hardware reinforcement
ADA COMPLIANCE	10" ADA bottom rail on specific styles

DOOR TESTING	
Refer to Rating section for details.	
FIRE RATING	20-minute or 90-minute
SECURITY RATING	Grade 40
STC RATING	25
OITC RATING	24
U-VALUE	0.17




CAMBRIDGE SERIES

HEIGHT 6'8" & 7'0" PROFILE FL STYLE FLUSH



BIM | CAD | Specs

Additional drawing details available on ARCAT.

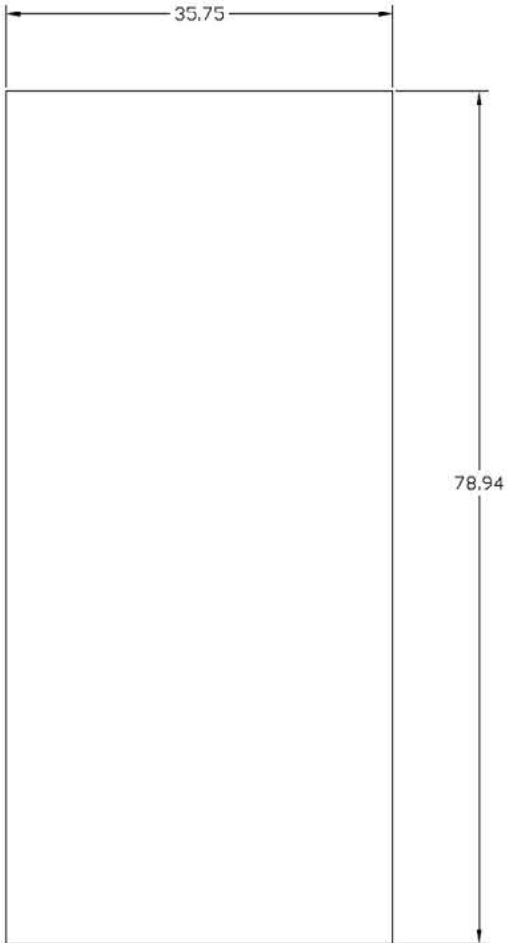


HINGE PREP OPTIONS	
4" surface mount, fixed hinge	
4" surface mount, adjustable hinge	
4" surface mount, template fixed hinge	
4-1/2" surface mount, commercial template fixed hinge	
ADA COMPLIANCE	
flush panel	
FIRE RATING	
20-minute	
90-minute	
SIDELITES	
available in 24-gauge only; refer to Midland series (page 73)	

SIZE AVAILABILITY	
	2'0" 2'2" 2'4" 2'6" 2'8" 2'10" 3'0" 3'2" 3'4" 3'6"
6'8"	• • • • • • • • • •
7'0"	• • • • • • • • • •
8'0"	• • • • • • • •
Minimum	2'0" W x 6'8" H
Maximum	3'0" W x 8'0" H
Custom or Remodeler Unit (RU) sizes available upon request.	

CUSTOM CUTOUTS	
available upon request	

STANDARD CUTOUTS		
Style #	Glass Size	Cutout Size
LT7	22" x 64"	23" x 65"
LT8	20" x 64"	21" x 65"
LT17	14" x 64"	15" x 65"
Additional standard cutouts available.		




CAMBRIDGE SERIES

HEIGHT 8'0" PROFILE FL STYLE FLUSH



BIM | CAD | Specs

Additional drawing details available on ARCAT.

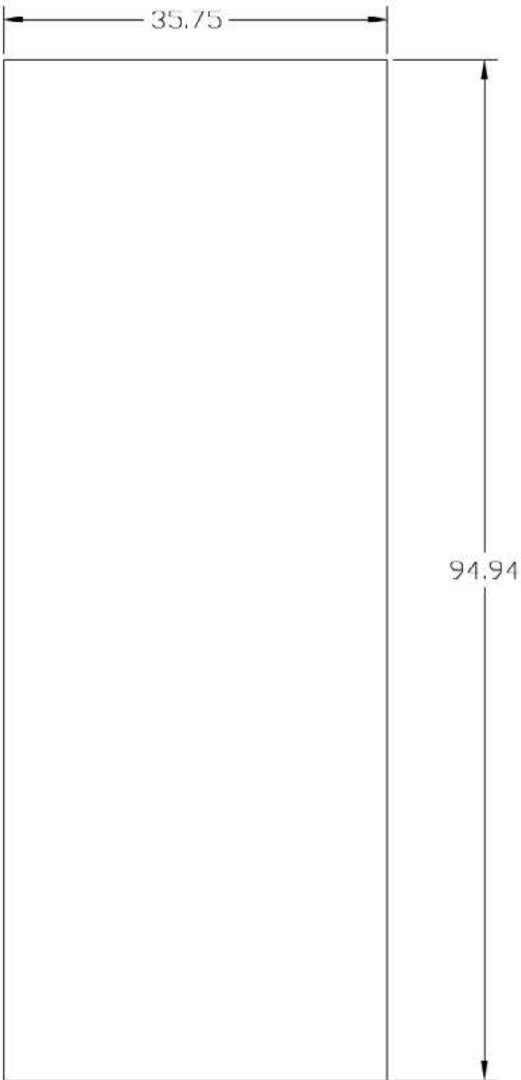

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge

ADA COMPLIANCE

flush panel

FIRE RATING

- 20-minute
- 90-minute

SIDELITES

available in 24-gauge only; refer to Midland series (page 73)

SIZE AVAILABILITY

	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	3'2"	3'4"	3'6"
6'8"	•	•	•	•	•	•	•	•	•	•
7'0"	•	•	•	•	•	•	•	•	•	•
8'0"	•	•	•	•	•	•	•			
Minimum	2'0" W x 6'8" H									
Maximum	3'0" W x 8'0" H									

Custom or Remodeler Unit (RU) sizes available upon request.

CUSTOM CUTOUTS

available upon request

CAMBRIDGE SERIES

HEIGHT 6'8" & 7'0" PROFILE 1FPS STYLE 1-PANEL FLAT SHAKER



BIM | CAD | Specs

Additional drawing details available on ARCAT.



HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge

ADA COMPLIANCE

10.44" bottom rail option

FIRE RATING

- 20-minute
- 90-minute

SIDELITES

available in 24-gauge only; refer to Midland series (page 73)


SIZE AVAILABILITY

	2'8"	2'10"	3'0"
6'8"	•	•	•
7'0"	•	•	•
8'0"	•	•	•
Minimum	2'8" W x 6'8" H		
Maximum	3'0" W x 8'0" H		

Custom or Remodeler Unit (RU) sizes available upon request.

CUSTOM CUTOUTS

available upon request

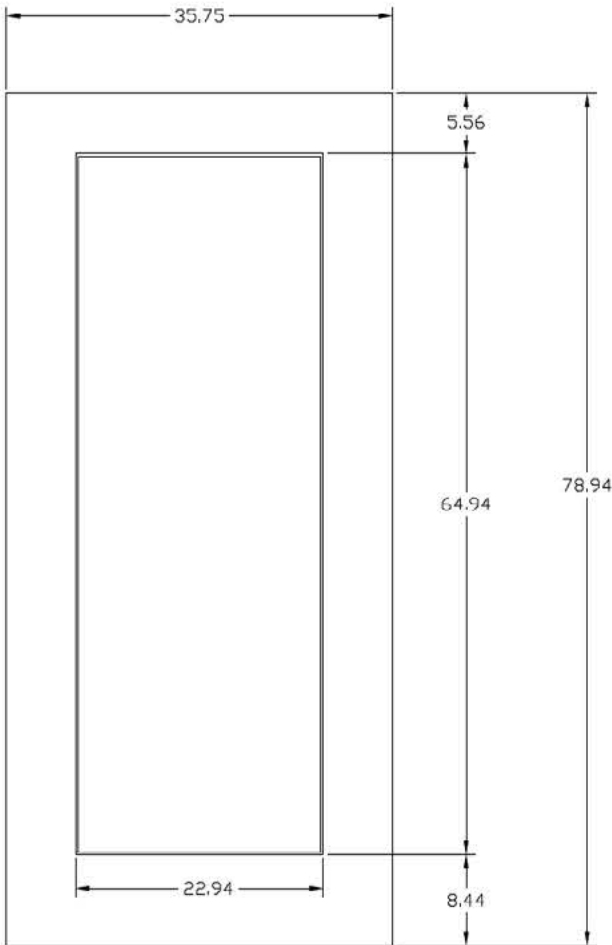


CAMBRIDGE SERIES

HEIGHT 8'0" PROFILE 1FPS STYLE 1-PANEL FLAT SHAKER



BIM | CAD | Specs

Additional drawing details available on ARCAT.

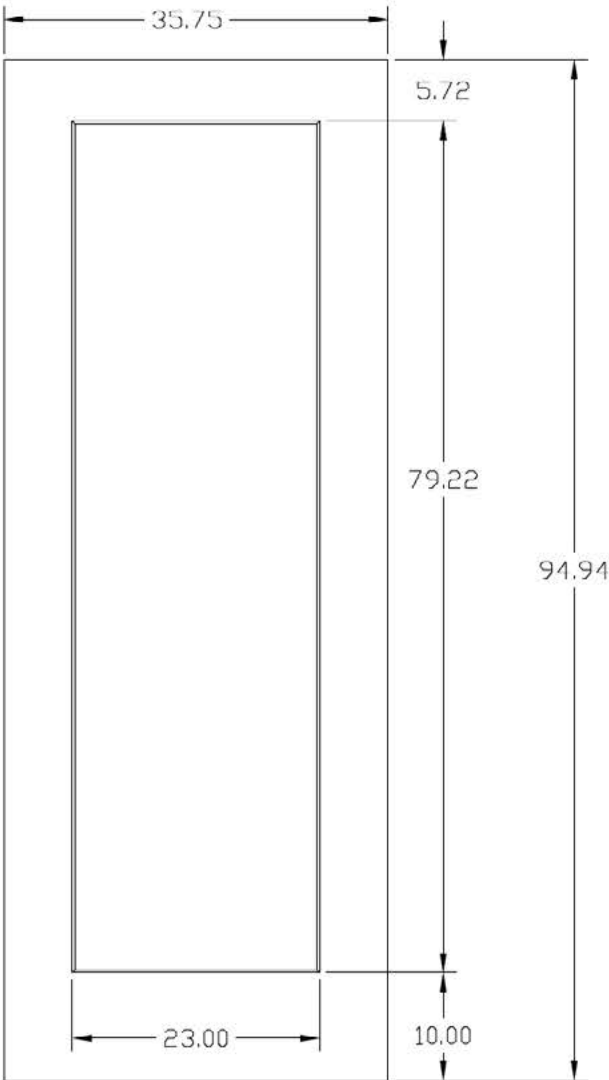

HINGE PREP OPTIONS

4" surface mount, fixed hinge

4" surface mount, adjustable hinge

4" surface mount, template fixed hinge

4-1/2" surface mount, commercial template fixed hinge

ADA COMPLIANCE

10" bottom rail

FIRE RATING

20-minute

90-minute

SIDELITES

available in 24-gauge only; refer to Midland series (page 73)

SIZE AVAILABILITY

	2'8"	2'10"	3'0"
6'8"	•	•	•
7'0"	•	•	•
8'0"	•	•	•
Minimum	2'8" W x 6'8" H		
Maximum	3'0" W x 8'0" H		

Custom or Remodeler Unit (RU) sizes available upon request.

CUSTOM CUTOUTS

available upon request


CAMBRIDGE SERIES

HEIGHT 6'8" & 7'0" PROFILE 2FPS STYLE 2-PANEL FLAT SHAKER



BIM | CAD | Specs

Additional drawing details available on ARCAT.

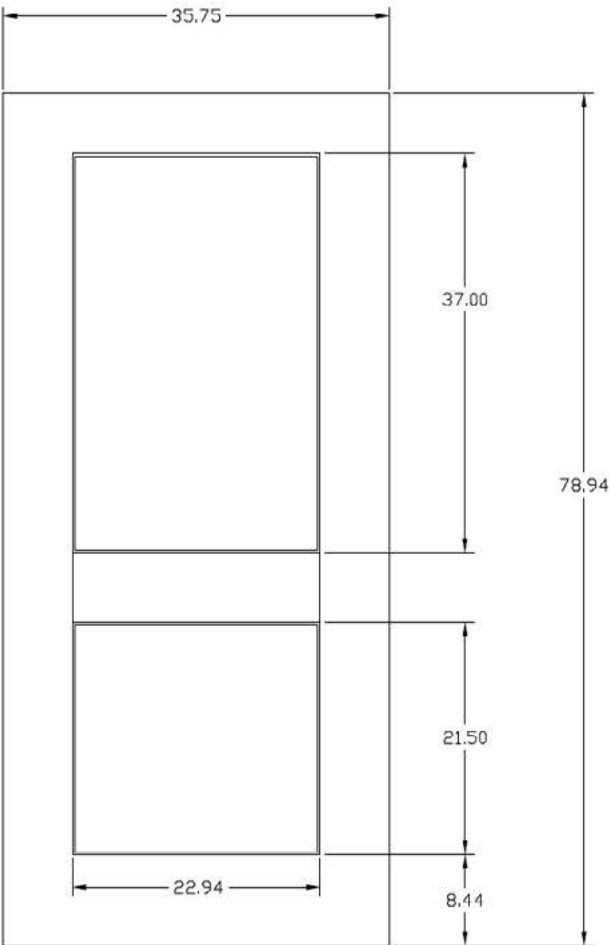

HINGE PREP OPTIONS

4" surface mount, fixed hinge

4" surface mount, adjustable hinge

4" surface mount, template fixed hinge

4-1/2" surface mount, commercial template fixed hinge

ADA COMPLIANCE

10.44" bottom rail option

FIRE RATING

20-minute

90-minute

SIDELITES

available in 24-gauge only; refer to Midland series (page 73)

SIZE AVAILABILITY

	2'8"	2'10"	3'0"
6'8"	•	•	•
7'0"	•	•	•
8'0"	•	•	•
Minimum	2'8" W x 6'8" H		
Maximum	3'0" W x 8'0" H		

Custom or Remodeler Unit (RU) sizes available upon request.

CUSTOM CUTOUTS

available upon request


CAMBRIDGE SERIES

HEIGHT 8'0" PROFILE 2FPS STYLE 2-PANEL FLAT SHAKER



BIM | CAD | Specs

Additional drawing details available on ARCAT.

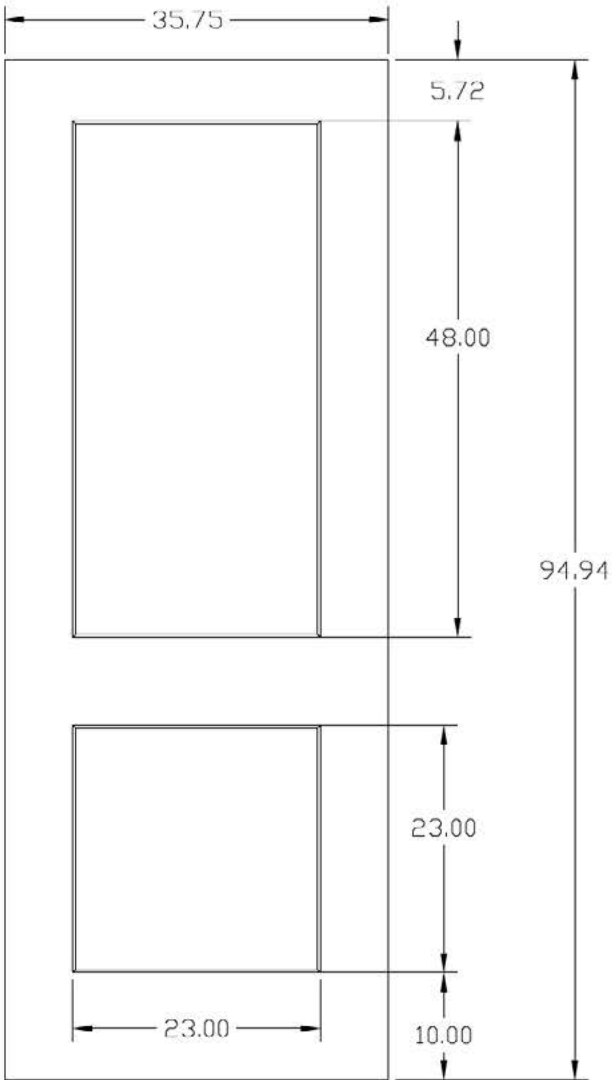

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge

ADA COMPLIANCE

- 10" bottom rail

FIRE RATING

- 20-minute
- 90-minute

SIDELITES

available in 24-gauge only; refer to Midland series (page 73)

SIZE AVAILABILITY

	2'8"	2'10"	3'0"
6'8"	•	•	•
7'0"	•	•	•
8'0"	•	•	•
Minimum	2'8" W x 6'8" H		
Maximum	3'0" W x 8'0" H		

Custom or Remodeler Unit (RU) sizes available upon request.

CUSTOM CUTOUTS

available upon request


CAMBRIDGE SERIES

HEIGHT 6'8" & 7'0" PROFILE 3/4-2PSTHD STYLE 3/4 2-PANEL RAISED



BIM | CAD | Specs

Additional drawing details available on ARCAT.

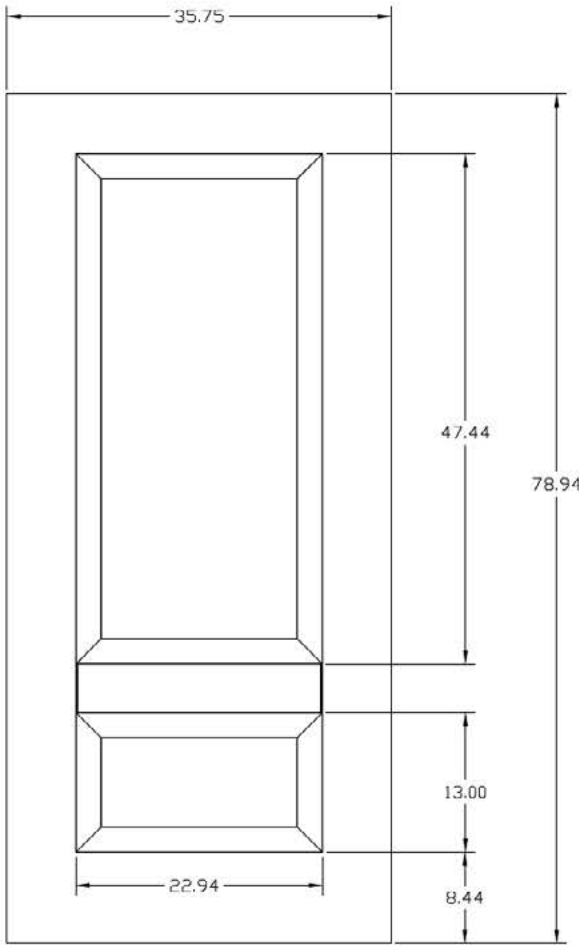

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge

ADA COMPLIANCE

- 10.44" bottom rail option

FIRE RATING

- 20-minute
- 90-minute

SIDELITES

available in 24-gauge only; refer to Midland series (page 73)

SIZE AVAILABILITY

	2'8"	2'10"	3'0"
6'8"	•	•	•
7'0"	•	•	•
8'0"			
Minimum	2'8" W x 6'8" H		
Maximum	3'0" W x 7'0" H		


Custom or Remodeler Unit (RU) sizes available upon request.

CUSTOM CUTOUTS

available upon request


CAMBRIDGE SERIES

HEIGHT 6'8" & 7'0" PROFILE 3PEFS STYLE 3-PANEL HORIZONTAL FLAT SHAKER

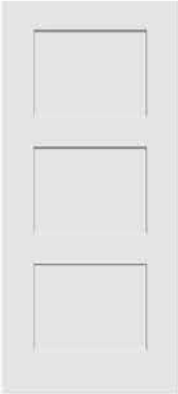

BIM | CAD | Specs

Additional drawing details available on ARCAT.

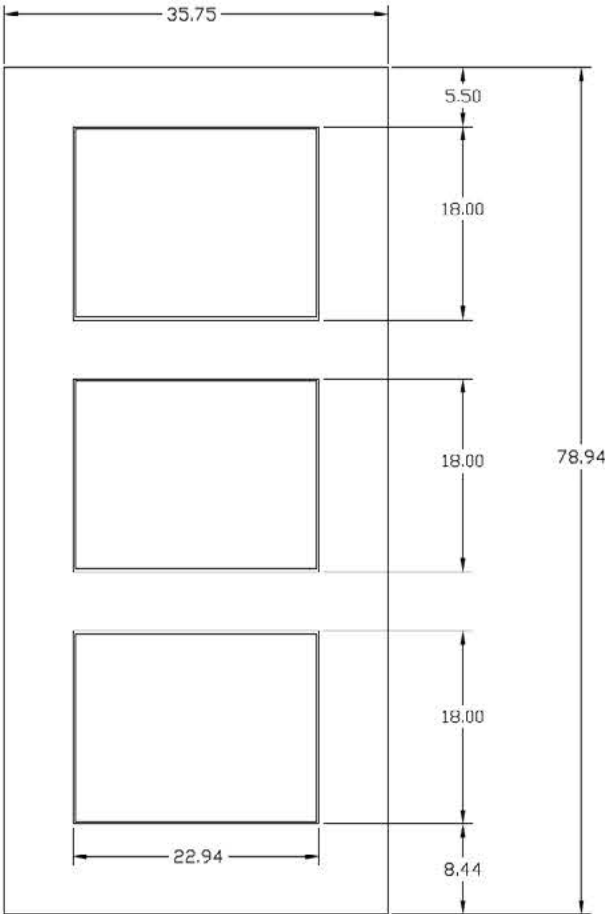

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge

ADA COMPLIANCE

10.44" bottom rail option

FIRE RATING

- 20-minute
- 90-minute

SIDELITES

available in 24-gauge only; refer to Midland series (page 73)

SIZE AVAILABILITY

	2'8"	2'10"	3'0"
6'8"	•	•	•
7'0"	•	•	•
8'0"			
Minimum	2'8" W x 6'8" H		
Maximum	3'0" W x 7'0" H		

Custom or Remodeler Unit (RU) sizes available upon request.

CUSTOM CUTOUTS

available upon request

CAMBRIDGE SERIES

HEIGHT 6'8" & 7'0" PROFILE 3FPS STYLE 3-PANEL FLAT SHAKER



BIM | CAD | Specs

Additional drawing details available on ARCAT.

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge

ADA COMPLIANCE

10.44" bottom rail option

FIRE RATING

- 20-minute
- 90-minute

SIDELITES

available in 24-gauge only; refer to Midland series (page 73)


SIZE AVAILABILITY

	2'8"	2'10"	3'0"
6'8"	•	•	•
7'0"	•	•	•
8'0"			
Minimum	2'8" W x 6'8" H		
Maximum	3'0" W x 7'0" H		

Custom or Remodeler Unit (RU) sizes available upon request.


CUSTOM CUTOUTS

available upon request

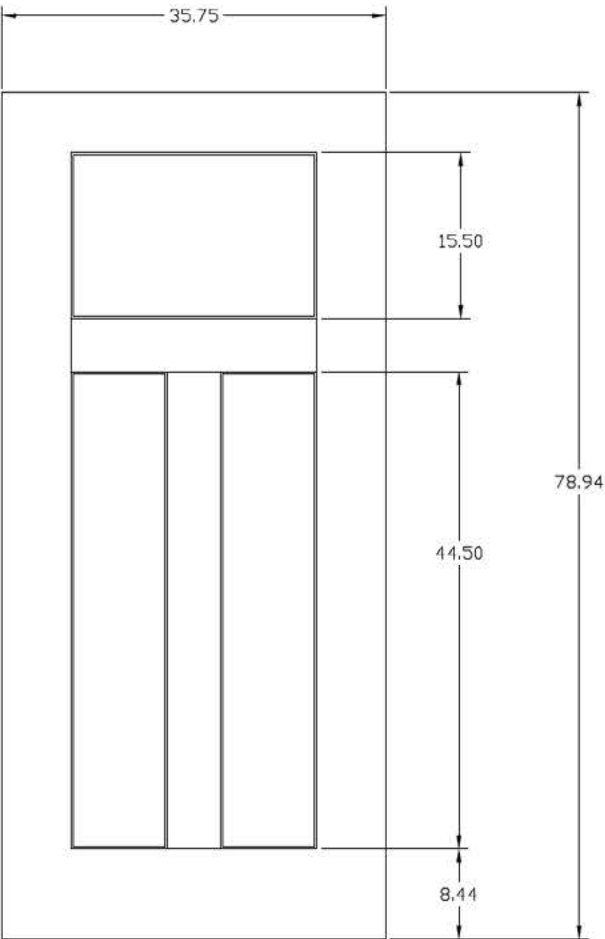

STANDARD CUTOUTS

Style #	Glass Size	Cutout Size
LT114	22" x 17"	23" x 18"



CAMBRIDGE SERIES

HEIGHT6'8" & 7'0"


PROFILE3PCRHD

STYLE3-PANEL CRAFTSMAN RAISED



BIM | CAD | Specs

Additional drawing details available on ARCAT.

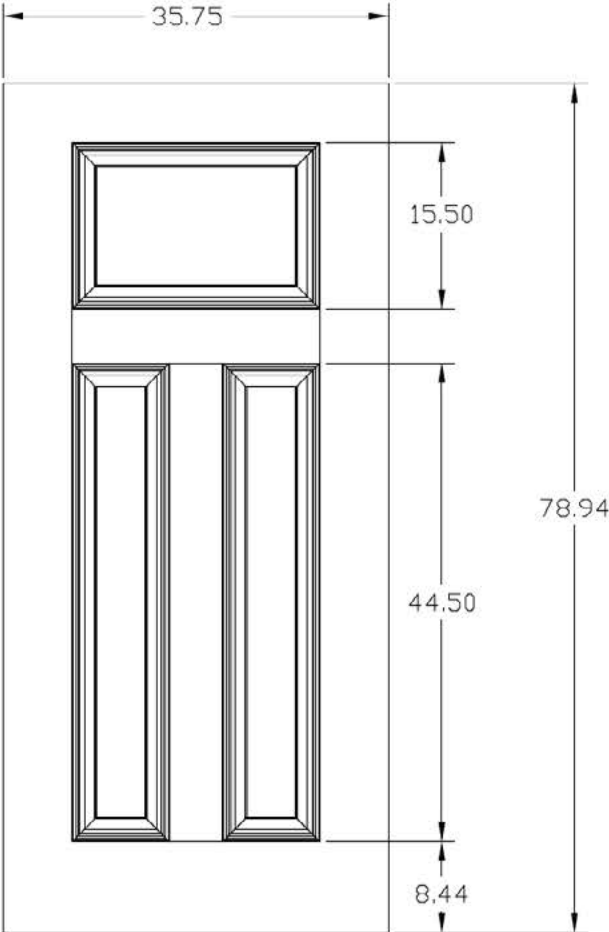

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge

ADA COMPLIANCE

- 10.44" bottom rail option

FIRE RATING

- 20-minute
- 90-minute

SIDELITES

- available in 24-gauge only; refer to Midland series (page 73)

SIZE AVAILABILITY

	2'8"	2'10"	3'0"
6'8"	•	•	•
7'0"	•	•	•
8'0"			
Minimum	2'8" W x 6'8" H		
Maximum	3'0" W x 7'0" H		



Custom or Remodeler Unit (RU) sizes available upon request.

CUSTOM CUTOUTS

- available upon request

STANDARD CUTOUTS

Style #	Glass Size	Cutout Size
LT62		23" x 15.5"
LT83	25" x 15-1/4"	26" x 16-1/4"
LT85	22" x 15-1/4"	23" x 26-1/4"
LT100	22" x 16"	23" x 17"



CAMBRIDGE SERIES

HEIGHT6'8" & 7'0"


PROFILE5PE

STYLE5-PANEL HORIZONTAL SHAKER



BIM | CAD | Specs

Additional drawing details available on ARCAT.

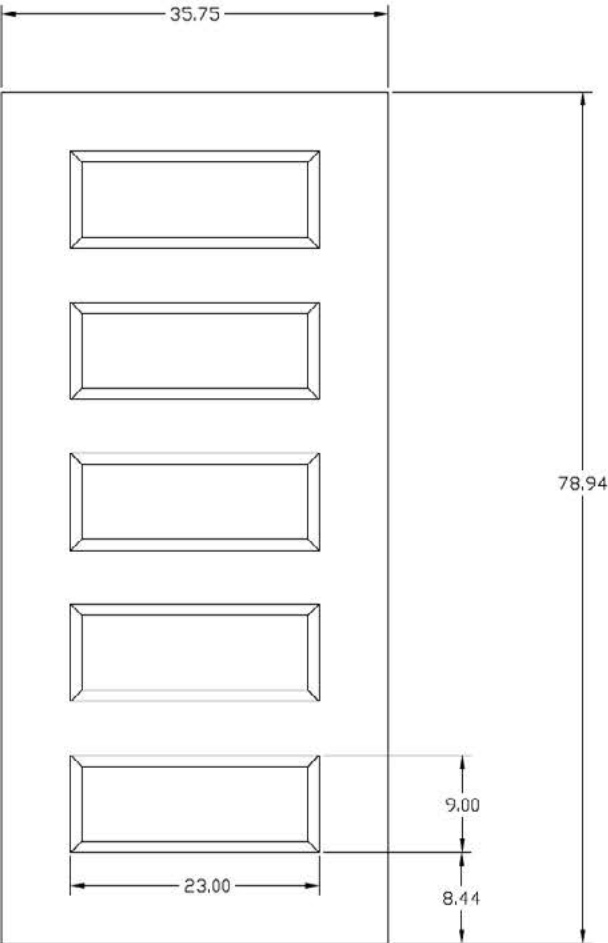

HINGE PREP OPTIONS

- 4" surface mount, fixed hinge
- 4" surface mount, adjustable hinge
- 4" surface mount, template fixed hinge
- 4-1/2" surface mount, commercial template fixed hinge

ADA COMPLIANCE

- 10.44" bottom rail option

FIRE RATING

- 20-minute
- 90-minute

SIDELITES

- available in 24-gauge only; refer to Midland series (page 73)

SIZE AVAILABILITY

	2'8"	2'10"	3'0"
6'8"	•	•	•
7'0"	•	•	•
8'0"	refer to profile #6PE		
Minimum	2'8" W x 6'8" H		
Maximum	3'0" W x 8'0" H		

Custom or Remodeler Unit (RU) sizes available upon request.

CUSTOM CUTOUTS

- available upon request


DOORS BUILT TO SPEC

At Taylor, we build entry doors one at a time, to any spec. These custom capabilities are available within the standard lead time.


- Specs to match competitive brands
- Specs to match hollow metal frames: Amweld, Republic, Ceco, Curries, Mesker, and more.
- Specs to match light gauge metal frames: IDP, Timely, RediFrame, and more.
- Special heights & widths




ADA SILLS




5" ADA Saddle
fits 4.5" - 5.5" wall thickness



6" ADA Saddle
fits 5.5" - 6.5" wall thickness



7" ADA Saddle
fits 6.5" - 7.5" wall thickness



8" ADA Saddle
fits 7.5" - 8.5" wall thickness

CLOSER & PANIC BAR PREPS



CLOSER
BLOCK



PANIC PREP
& CLOSER
PLATES



HEAD &
FOOT BOLT



MULTI-
PURPOSE
PREP

SPECIAL HEIGHT & WIDTH

STEEL-EDGE DOOR HEIGHT & WIDTHS

Up to 7/0 height, any width between 23.75" and 41.75"

Over 7/0 height, any width between 23.75" and 35.75"

Minimum height is 76"

Maximum height is 95.25"

HANDING

To hand a door, Face it from the outside or key side

Left Hand Inswing
Hinges on left
Opens inward



Right Hand Inswing
Hinges on right
Opens inward



Left Hand Reverse
Hinges on left
Opens outward



Right Hand Reverse
Hinges on right
Opens outward



TECHNICAL INFORMATION

We strive to build doors that work for every need and application. Whether you're looking for a fire-rated door, ADA-compliant features, or a door that is Texas Department of Insurance (TDI) approved, we have something for your project.




Download high quality design files and product specs from ARCAT.com for our fiberglass and steel entrance door systems.

- CAD drawings
- Revit & SketchUp BIM files
- LEED data
- Product specs




ARCAT

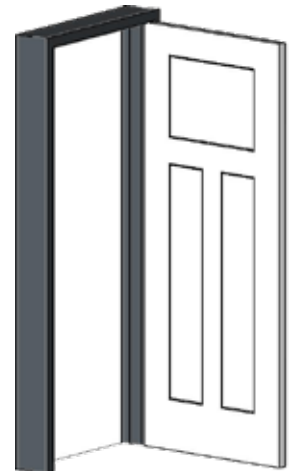

TAYLORDOOR.COM

Visit our website's Technical Library for tools to help you specify exterior doors for your next project.

- Fire ratings
- Product details
- STC and OITC ratings
- Impact & Design Pressure information
- Installation Guides



Technical Library



Literature

SOUND TRANSMISSION CLASS (STC) RATING

Product	STC Rating
WestGuard 20-Gauge Steel Door	21
WestGuard 20-Gauge Steel Door with 1" I.G. Full Lite	28
22-Gauge Steel-Edge Door	25
22-Gauge Steel-Edge Door with 1" I.G. Full Lite	28
24-Gauge Steel-Edge Door	22
24-Gauge Steel-Edge Door with 1" I.G. Full Lite	25
Edgewood® 25-Gauge Wood-Edge Steel Door	24
Grand Marais Fiberglass Door	25
Timbergrain Fiberglass Door	25

APPROVALS

- View products approved by HVHZ in our website's Technical Library, or from the Florida Building Code website.
- Our products meet the requirements for ENERGY STAR, coastal codes and industry security tests.




FIRE RATINGS

Product	Fire Rating
Cambridge Smooth Steel Collection	20 or 90 minute
WestGuard 20-Gauge Steel Collection	20 or 90 minute
Trugrain™ Steel Collection	20 or 90 minute
Norwood Stainable Steel Collection	20 or 90 minute
TruKote Steel Collection	20 or 90 minute
Edgewood® Wood-Edge Steel Collection	20 minute
Grand Marais Fiberglass Collection	20 minute (select styles)
Timbergrain Fiberglass Collection	not rated



FIRE GLASS

NOTE: Other styles available by request.

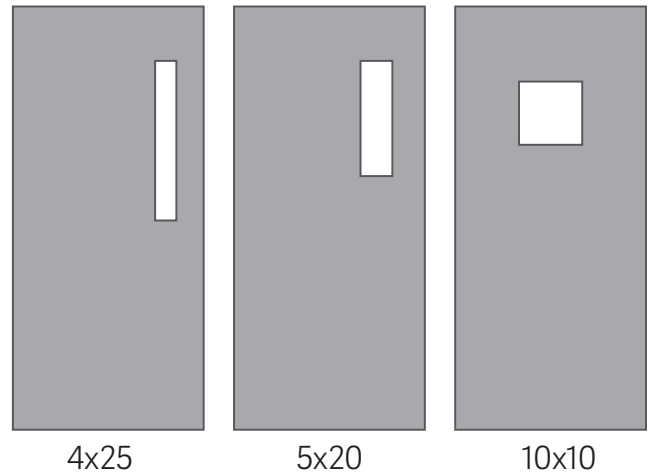

TEXAS HURRICANE & WIND LOAD APPROVALS

Texas Department of Insurance (TDI) approvals

Product	Description	TDI Approval Numbers
Impact	6/8 and 8/0 Glazed Steel Entry Doors, Inswing and Outswing, Singles and Doubles, with and without Sidelights	DR-737, TX4504, TX4505, TX4506, TX4507
Impact	7/0 Opaque Steel Entry Doors with IDP Adjustable Steel Door Frame, Inswing and Outswing, Singles	DR-740, TX4503
Impact	7/0 Opaque Steel Entry Doors with Dunbarton Adjustable Steel Door Frame, Inswing and Outswing	DR-964, TX4784
Impact	6/8 Opaque Wood Edge Steel Side Hinge Doors, Outswing and Inswing, Singles	DR-993, TX4862
Non-Impact	6/8 and 8/0 Glazed Steel Entry Doors, Inswing and Outswing, Singles and Doubles, with and without Sidelights	DR-734, TX4496, TX4497, TX4498, TX4495
Non-Impact	6/8 and 8/0 Opaque Steel Entry Doors, Inswing and Outswing, Singles and Doubles, with and without Sidelights	DR-739, TX4499, TX4500, TX4501, TX4502
Timbergrain Impact	6/8 and 8/0 Single Opaque Fiberglass Entry Doors, Inswing and Outswing	DR-606, TX4512, TX4513
Timbergrain Non-Impact	6/8 and 8/0 Glazed Fiberglass Entry Doors, Inswing, Singles & Doubles, with and without Sidelights	DR-619, TX4518, TX4259, TX4260, TX4261

HURRICANE & WIND LOAD

APPROVALS

Taylor Entrance Systems™ has products available to meet hurricane and wind load requirements. We manufacture products approved for sale in both the HVHZ (High-Velocity Hurricane Zone) and non-HVHZ areas of Florida. A detailed summary of the approvals is available from our website's Technical Library.

The approvals and details are available on the Florida Building Code (FBC) website at floridabuilding.org. To access these documents, search under the Product Approval section.

Florida Approval Number	Model, Number, or Name	Description	Approved for use in HVHZ	Approved for use outside HVHZ	Impact Resistant
FL-8845.1	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Single (X) Configuration up to 6/8 in Height	X	X	X
FL-8845.2	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Single with Sidelite (XO or OX) Configuration up to 6/8 in Height	X	X	X
FL-8845.3	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Single with Sidelites (OXO) Configuration up to 6/8 in Height	X	X	X
FL-8845.4	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Double (XX) Configuration up to 6/8 in Height	X	X	X
FL-8845.5	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Double with Sidelites (OXXO) Configuration up to 6/8 in Height	X	X	X
FL-8845.6	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Single (X) Configuration up to 8/0 in Height	X	X	X
FL-8845.7	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Single with Sidelite (XO or OX) Configuration up to 8/0 in Height	X	X	X
FL-8845.8	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Single with Sidelites (OXO) Configuration up to 8/0 in Height	X	X	X
FL-8845.9	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Double (XX) Configuration up to 8/0 in Height	X	X	X
FL-8845.10	Steel Edge Door - Glazed	Outswing or Inswing Insulated "Impact" Glazed Steel Edge Door - Double with Sidelites (OXXO) Configuration up to 8/0 in Height	X	X	X
FL-8845.11	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Single (X) Configuration up to 6/8 in Height	X	X	X
FL-8845.12	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Single with Sidelite (XO or OX) Configuration up to 6/8 in Height	X	X	X
FL-8845.13	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Single with Sidelites (OXO) Configuration up to 6/8 in Height	X	X	X
FL-8845.14	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Double (XX) Configuration up to 6/8 in Height	X	X	X
FL-8845.15	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Double with Sidelites (OXXO) Configuration up to 6/8 in Height	X	X	X
FL-8845.16	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Single (X) Configuration up to 8/0 in Height	X	X	X
FL-8845.17	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Single with Sidelite (XO or OX) Configuration up to 8/0 in Height	X	X	X
FL-8845.18	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Single with Sidelites (OXO) Configuration up to 8/0 in Height	X	X	X
FL-8845.19	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Double (XX) Configuration up to 8/0 in Height	X	X	X
FL-8845.20	Steel Edge Door - Opaque	Outswing or Inswing Insulated "Impact" Opaque Steel Edge Door - Double with Sidelites (OXXO) Configuration up to 8/0 in Height	X	X	X
FL-9542.1	Steel Edge Door - Glazed	6/8 "Non-Impact" Glazed Steel Edge Single Insulated Steel Door - Outswing / Inswing (X) Configuration		X	
FL-9542.2	Steel Edge Door - Glazed	6/8 "Non-Impact" Glazed Steel Edge Single Insulated Steel Door with or without "Non-Impact" Sidelite or Sidelites - Outswing / Inswing (OX or XO; OXO) Configurations		X	
FL-9542.3	Steel Edge Door - Glazed	6/8 "Non-Impact" Glazed Steel Edge Double Insulated Steel Door with or without "Non-Impact" Sidelites - Outswing / Inswing (XX; OXXO) Configurations		X	
FL-9542.4	Steel Edge Door - Glazed	8/0 "Non-Impact" Glazed Steel Edge Single Insulated Steel Door - Outswing / Inswing (X) Configuration		X	

Florida Approval Number	Model, Number, or Name	Description	Approved for use in HVHZ	Approved for use outside HVHZ	Impact Resistant
FL-9542.5	Steel Edge Door - Glazed	8/0 "Non-Impact" Glazed Steel Edge Single Insulated Steel Door with or without "Non-Impact" Sidelite or Sidelites - Outswing / Inswing (OX or XO; OXO) Configurations		X	
FL-9542.6	Steel Edge Door - Glazed	8/0 "Non-Impact" Glazed Steel Edge Double Insulated Steel Door with or without "Non-Impact" Sidelites - Outswing / Inswing (XX; OXXO) Configurations		X	
FL-14513.1	Steel Edge Door - Opaque	Up to a Nominal 3/6 x 7/0 Opaque Steel Edge Steel Door in a Two Piece Steel Frame System (K2A Series Steel frame). Inswing / Outswing Configuration (X)	X	X	X
FL-14513.2	Steel Edge Door - Opaque	Up to a Nominal 3/6 x 7/0 Opaque Steel Edge Steel Door in a Fixed Steel Frame System (F Series Steel frame). Inswing / Outswing Configuration (X)	X	X	X
FL-14513.3	Steel Edge Door - Opaque	Up to a Nominal 3/6 x 7/0 Opaque Steel Edge Steel Door in a Two Piece Steel Frame System (Rediflex Steel frame). Inswing / Outswing Configuration (X)		X	X
FL-15135.1	Wood Edge Door - Glazed	Insulated Glazed Wood Edge Steel Door - Single (X) Outswing/Inswing Configurations up to 6/8 in Height		X	
FL-15135.2	Wood Edge Door - Glazed	Insulated Glazed Wood Edge Steel Door - Single with or without Sidelites (OX or XO, OXO) Outswing/Inswing Configurations up to 6/8 in Height		X	
FL-15135.3	Wood Edge Door - Glazed	Insulated Glazed Wood Edge Steel Door - Double with or without Sidelites (XX, OXXO) Outswing/Inswing Configurations up to 6/8 in Height		X	
FL-15135.4	Wood Edge Door - Glazed	Insulated "Impact" Glazed Wood Edge Steel Door - Single (X) Outswing/Inswing Configurations up to 6/8 in Height		X	X
FL-15135.5	Wood Edge Door - Glazed	Insulated "Impact" Glazed Wood Edge Steel Door - Single with or without Sidelites (OX or XO, OXO) Outswing/Inswing Configurations up to 6/8 in Height		X	X
FL-15135.6	Wood Edge Door - Glazed	Insulated "Impact" Glazed Wood Edge Steel Door - Double with or without Sidelites (XX, OXXO) Outswing/Inswing Configurations up to 6/8 in Height		X	X
FL-15135.7	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Single (X) Outswing/Inswing Configurations up to 6/8 in Height		X	X
FL-15135.8	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Single with or without Sidelites (OX or XO, OXO) Outswing/Inswing Configurations up to 6/8 in Height (Utilizes Taylor "Impact" Sidelites)		X	X
FL-15135.9	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Double with or without Sidelites (XX, OXXO) Outswing/Inswing Configurations up to 6/8 in Height (Utilizes Taylor "Impact" Sidelites)		X	X
FL-15135.10	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Single with or without Sidelites (OX or XO, OXO) Outswing/Inswing Configurations up to 6/8 in Height (Utilizes ODL "Impact" Sidelites)		X	X
FL-15135.11	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Double with Sidelites (OXXO) Outswing/Inswing Configurations up to 6/8 in Height (Utilizes ODL "Impact" Sidelites)		X	X
FL-15135.12	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Single (X) Outswing/Inswing Configurations up to 8/0 in Height		X	X
FL-15135.13	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Single with or without Sidelites (OX or XO, OXO) Outswing/Inswing Configurations up to 8/0 in Height (Utilizes Taylor "Impact" Sidelites)		X	X
FL-15135.14	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Double with or without Sidelites (XX, OXXO) Outswing/Inswing Configurations up to 8/0 in Height (Utilizes Taylor "Impact" Sidelites)		X	X
FL-15135.15	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Single with or without Sidelites (OX or XO, OXO) Outswing/Inswing Configurations up to 8/0 in Height (Utilizes ODL "Impact" Sidelites)		X	X
FL-15135.16	Wood Edge Door - Glazed	Insulated "Impact" Opaque Wood Edge Steel Door - Double with Sidelites (OXXO) Outswing/Inswing Configurations up to 8/0 in Height (Utilizes ODL "Impact" Sidelites)		X	X
FL-15931.1	Timbergrain	Up to a 3/0 x 6/8 Opaque Fiberglass Door (X Configuration) Inswing/Outswing		X	X
FL-15931.2	Timbergrain	Up to a 3/0 x 6/8 Opaque Fiberglass Door with Non-impact Fiberglass Sidelite or Sidelites - Insulated Glass (XO or OX, OXO Configurations) Inswing or Outswing		X	
FL-15931.3	Timbergrain	Up to a 6/0 x 6/8 Opaque Fiberglass Door with or without Non-impact Fiberglass Sidelites - Insulated Glass (XX or OXXO Configurations) Inswing or Outswing		X	
FL-15931.4	Timbergrain	Up to a 3/0 x 6/8 Non-impact Glazed Fiberglass Door with Non-impact Glazed Fiberglass Sidelite or Sidelites - Insulated Glass (X, XO or OX, OXO Configurations) Inswing or Outswing		X	
FL-15931.5	Timbergrain	Up to a 6/0 x 6/8 Non-impact Glazed Fiberglass Door with or without Non-impact Fiberglass Sidelites - Insulated Glass (XX or OXXO Configurations) Inswing or Outswing		X	
FL-15931.6	Timbergrain	Up to a 3/0 x 8/0 Opaque Fiberglass Door (X Configuration) Inswing/Outswing		X	X
FL-15931.7	Timbergrain	Up to a 3/0 x 8/0 Opaque Fiberglass Door with Non-impact Fiberglass Sidelite or Sidelites - Insulated Glass (XO or OX, OXO Configurations) Inswing or Outswing		X	
FL-15931.8	Timbergrain	Up to a 6/0 x 8/0 Opaque Fiberglass Door with or without Non-impact Fiberglass Sidelites - Insulated Glass (XX or OXXO Configurations) Inswing or Outswing		X	
FL-15931.9	Timbergrain	Up to a 3/0 x 8/0 Non-impact Glazed Fiberglass Door with Non-impact Glazed Fiberglass Sidelite or Sidelites - Insulated Glass (X, XO or OX, OXO Configurations) Inswing or Outswing		X	
FL-15931.10	Timbergrain	Up to a 6/0 x 8/0 Non-impact Glazed Fiberglass Door with or without Non-impact Fiberglass Sidelites - Insulated Glass (XX or OXXO Configurations) Inswing or Outswing		X	

NOTE: Please visit the Florida Building Code website for full details of approvals.



75 YEARS OF INNOVATION

CUSTOM CAPABILITIES

Our entry doors can be customized to fit your spec.

ADDITIONAL AVAILABILITY

Additional sizes and styles may be available with extended lead times.

NO MINIMUMS OR MAXIMUMS

With no order requirements, you can get what you need, when you need it.



MICHIGAN MADE

Passion, hard work and respect – it's the culture of our workplace. We meticulously test for quality every day to ensure that you are receiving the best product we can produce. When you choose Taylor, you are choosing quality. Our products are built with pride and confidence, giving you the satisfaction of buying a high-quality, American made, reliable product.

HARD WORK + DEDICATION

We've established a management philosophy in which teamwork plays an important role. Our employees work together to manufacture quality entrance systems while our customers work closely with professionals to meet the demands of the end user.

PRODUCT INNOVATION

An unwavering commitment to beauty, quality, and value has allowed Taylor Entrance Systems™ to develop a long history of innovation, bringing numerous products to the market that have helped to further shape the fenestration industry.

We are dedicated to providing innovative solutions and value-added products to fill the needs in an ever-changing marketplace.

PARTNERSHIP

At Taylor Entrance Systems™, we credit our success to our dedicated employees, the quality of our products and the integrity of our customers. Building meaningful relationships in all aspects of our business is a priority.

Contact our exceptional Customer Service department for order inquiries.

Phone: 800.248.3600

Fax: 800.252.5468

Request a Quote: quotes@taylordoor.com

Place an Order: orders@taylordoor.com

Beauty, quality,
and value are on
display in every
product we make.



Shown: WestGuard Steel,
3-Panel Flat Shaker



WOOLF DISTRIBUTING

www.woolfdistributing.com

GREEN BAY, WI

551 Packerland Dr.

1-920-499-2117

Email:

woolfgb@woolfdistributing.com

Orders:

order-gb@woolfdistributing.com

PEORIA, IL

515 South Maxwell Rd.

1-309-697-1760

Email:

woolfpe@woolfdistributing.com

Orders:

order-pe@woolfdistributing.com

WOODSTOCK, IL

1625 West Lake Shore Dr.

woolf-ws@woolfdistributing.com

Building Materials: **1-815-477-9680**

order-ws@woolfdistributing.com

Millwork: **1-815-356-0438**

order-mw@woolfdistributing.com

Commercial: **1-815-527-9288**

commercialdoors@woolfdistributing.com