

WIDTH

4.75 ft (1.45 m)

**LENGTH PER ROLL** 80 ft (24.38 m)

**MAX. UV EXPOSURE** 120 days


COMPOSITION

Polypropylene tri-laminate

**VAPOR PERMEABILITY** 12 perms

ADHESION Continuous Acrylic

FIRE RATING
Class A

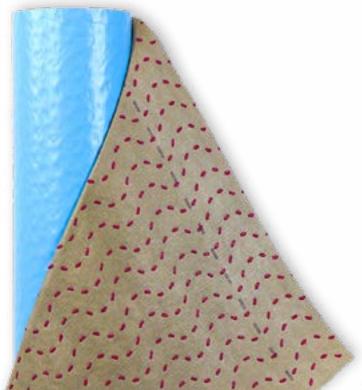

100% continuous acrylic adhesive technology provides true sealing around every fastener and penetration point

1mm spacers create a true drainage space with 96% drainage efficiency and removes water 2x faster than flat housewraps

Full line of flashing accessories available to complete the system and achieve warranty coverage for 20 years

Adheres to OSB, CDX, plywood, and CMU without the use of a prim-



**GREEN BAY, WI** 

551 Packerland Dr. **1-920-499-2117** 

Email:

woolfgb@woolfdistributing.com Orders:

order-gb@woolfdistributing.com

PEORIA, IL

515 South Maxwell Rd.

**1-309-697-1760** Email:

woolfpe@woolfdistributing.com
Orders:

order-pe@woolfdistributing.com

WOODSTOCK, IL

1625 West Lake Shore Dr.
woolf-ws@woolfdistributing.com
Building Materials: 1-815-477-9680
order-ws@woolfdistributing.com
Millwork: 1-815-356-0438
order-mw@wooldistributing.com
Commercial: 1-815-527-9288
commercialdoors@wooldistributing.com