SUPERIOR

MARWIN

300 to 350 lb Duty Rating

OVERVIEW

1x5 solid wood frame and stringer

1 1x6 solid wood treads with safety grooves

Fits ceiling heights from 7'6" to 10'4"

FEATURES

Fully assembled

Heavy duty galvanized steel hardware with "Safety Edge"

Adjustable spring tension

I Full-width continuous hinge

Complete easy-to-follow installation instructions

/ High grade, kiln-dried, yellow pine lumber

CARB certified plywood

Lifetime Spring Warranty

Clear plywood panel

OPTIONS

SP - Superior Plus 350 lb Duty Rated

Fire Retardant Treated panel compliant with ASTM E84

Energy Saving Packages

10'9" Model Available

I Pull down rod with eye hook

STANDARD OPENING SIZES

22-1/2" wide x 54" long

√ 30" wide x 54" long





THUDRAILS WITH SAFETY EDE





HETTA Strong and Durable 375 lb Load Capality

MARWII

These heavy duty aluminum attic stairs are made with high quality aluminum and offer a limited lifetime warranty on the springs and aluminum sections. The TITAN gives extra utility to what is already the best value component in a home: valuable attic storage.

OVERVIEW

1375 lb duty rating

Heavy duty aluminum sections

Standard Energy-Saver R-3 Door Panel

Adjustable Foot Support with rubberized foot pads

Meets or exceeds ANSI 14-9 Standards for Attic Stairs

FEATURES

Fully assembled and ready to install

Adjustable spring tension

/ Full-width continuous hinge

Heavy duty galvanized steel hardware

Pull-down rod with eye hook

Secure easy grip handrail

CARB certified plywood

Lifetime Spring Warranty

OPTIONS

Optional 12' Ceiling height

Optional Fire Retardant treated

panels compliant with ASTM E84





TIER CK. SAVER R-3 DOOR PRINT





PUBBERIZED FOOT PADS

THE ATLAS MARWIN

OVERVIEW

1 1x4 solid wood frame and stringer

1 1x4 tread with safety grooves

Fits ceiling heights from 7'6" to 10'4"

FEATURES

Meets or exceeds ANSI 14-9 Standards for attic stairs

Adjustable spring tension

/ Full-width continuous hinge

I High grade, kiln-dried, yellow pine lumber

I Full-width continuous hinge

Galvanized steel hardware with safety edge

3/16" steel rod under treads

Safety grooved treads

Securely bolted strong metal handrail

Clear plywood panel

OPTIONS

Fire Retardant Treated panels compliant with ASTM E84


Energy Saving Packages

Pull down rod with eye hook

STANDARD OPENING SIZES

22-1/2" wide x 54" long



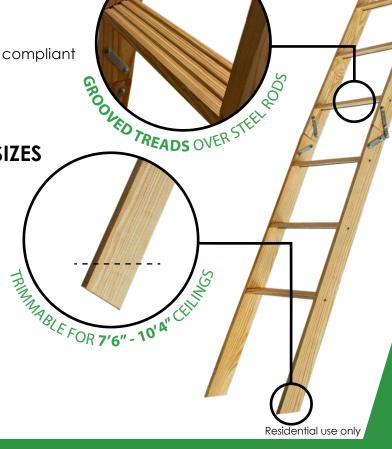

THE CONTINUOUS HINGS





MODEL#	ROUGH OPENING	CEILING HEIGHT	LANDING (1)	PROJECTION (2)
A-75	22½" X 48"	8'2"	54"	65"
A-80	22½" X 54"	8'9"	58"	67"
A-81	22½" X54"	10'0"	66"	77"
A-90	25½" X 48"	8'2"	54"	65"
A-100	25½" X 54"	8'9"	58"	67"
A-101	25½" X 54"	10'0"	66"	77"
A-102	25½" X 60"	8'9"	58"	69"
S-80	22½" X 54"	8'9"	59"	69"
S-81	22½" X 54"	10'0"	67"	79"
S-100	25½" X 54"	8'9"	59"	69"
S-101	25½" X 54"	10'0"	67"	79"
S-200	30" X 54"	8'9"	59"	69"
S-201	30" X 54"	10'0"	67"	79"
S-300	30" X 60"	8'9"	59"	71"
SP-89	22½" X 60"	10'9"	71"	83"
SP-109	25½" X 60"	10'9"	71"	83"
SP-309	30" X 60"	10'9"	71*	83"



GREEN BAY, WI

551 Packerland Dr.

1-920-499-2117 Email:

woolfgb@woolfdistributing.com Orders: order-gb@woolfdistributing.com PEORIA, IL

515 South Maxwell Rd.

1-309-697-1760

Email: woolfpe@woolfdistributing.com Orders:

order-pe@woolfdistributing.com

WOODSTOCK, IL

1625 West Lake Shore Dr. woolf-ws@woolfdistributing.com Building Materials: 1-815-477-9680 order-ws@woolfdistributing.com Millwork: 1-815-356-0438 order-mw@wooldistributing.com Commercial: 1-815-527-9288