












# Ridge Vent works on the basis of several principles.

Adequate soffit ventilation coupled with ridge ventilation produces a pathway for continuous airflow along the entire underside of the roof deck. Airflow is maintained two ways.

First, hot air naturally rises and exits out the ridge vent, pulling in cooler air from below. Second, positive airflow across the ridge of the house creates a "venturi effect", or a negative pressure, which pulls air out of the ridge vent and brings in cooler air from the soffits below. In calm or windy weather, the entire attic is vented by a constant flow of cooler, dryer outside air.

## HOW RIDGE VENT WORKS

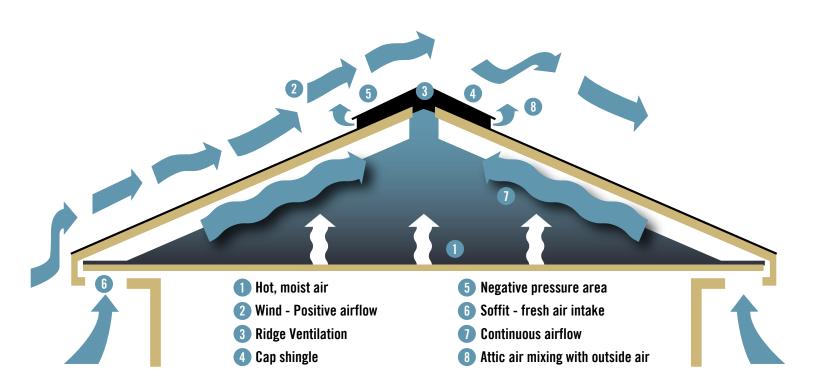

## Trying to decide which ridge vent is best for your project?

Take a look at some of the factors to consider when deciding which ridge vent works best for your style, installation, and aesthetic. Do you have a unique build that you would like to discuss in more detail? Give us a call at (800) 523-5261 or email us at techsupport@obdyke.com.

	STYLE INSTALLATION AESTHETIC  STYLE INSTALLATION AESTHETIC  Wall Comman Section  Section  Special Application									
Roll Vent standard	18	•		•		•		•	•	
Rapid Ridge standard	12.5	•			•	•		•	•	
Rapid Ridge 7	12.5	•			•			•	•	wood or slate
Cougar LP	13.5	•			•	•		•		
Xtractor Vent XLP	12.75		•		•	•	•			
Xtractor Vent X18	18		•	•		•	•			
Xtractor Vent X18 xtra	18		•	•			•		•	
Shark Vent XLP	12	•			•	•	•			



Roll Vent® ridge vent offers the most innovative, effective way to protect residential roofing from the deteriorating forces of excess heat and moisture build-up. Roll Vent is available in 20 or 50 foot rolls.

**Breathable weather barrier** that prevents rain, snow and insect infiltration

**Wing tip design prevents** shingles from folding over ridge vent, cutting off ventilation

End plug free installation saves time by shingling over

**See-through hinge** makes it easy to center over the ridge

Visible nail line for easier alignment

**Compression** resistant design

**NET FREE AREA** 

18 in<sup>2</sup>/ lin ft

WIDTH

10.5 in

LENGTH

20 ft & 50 ft rolls

**THICKNESS** 

.9 in

WARRANTY

Lifetime Limited



Texas Department of Insurance Product Evaluation (RV-01) - Standard Only Florida Building Code (FL 7751) - Standard Only Meets or exceeds: ICC, FHA, HUD, and NBC

800.523.5261 • techsupport@obdyke.com







Low profile design provides sleek and almost invisible protection

**Breathable weather barrier** prevents rain, snow, and insect infiltration

widths - Rapid Ridge Standard and Rapid Ridge 7.

Rapid Ridge® nail-gunnable ridge vent offers the quickest installation of any rolled roof ventilation product on the market, complete with superior weather and insect infiltration protection. The lightest ridge vent on a roll, Rapid Ridge is available in two

**Wing tip design** prevents shingles from folding over ridge vent, cutting off ventilation

**See-through hinge** makes it easy to center over the ridge

**End plug free** installation saves time by shingling over

Hot dipped collated galvanized ring-shank nails included

Nail-gunnable for fast installation

**Compression** resistant design

### **NET FREE AREA**

12.5 in<sup>2</sup>/ lin ft

WIDTH

10.5 in

LENGTH

20 ft & 50 ft rolls

**THICKNESS** 

.625 in


WARRANTY

Lifetime Limited

Code Approvals:

Fexas Department of Insurance Product Evaluation (RV-01) - Standard On Florida Building Code (FL 7751) - Standard On Meets or exceeds: ICC, FHA, HUD, and NR



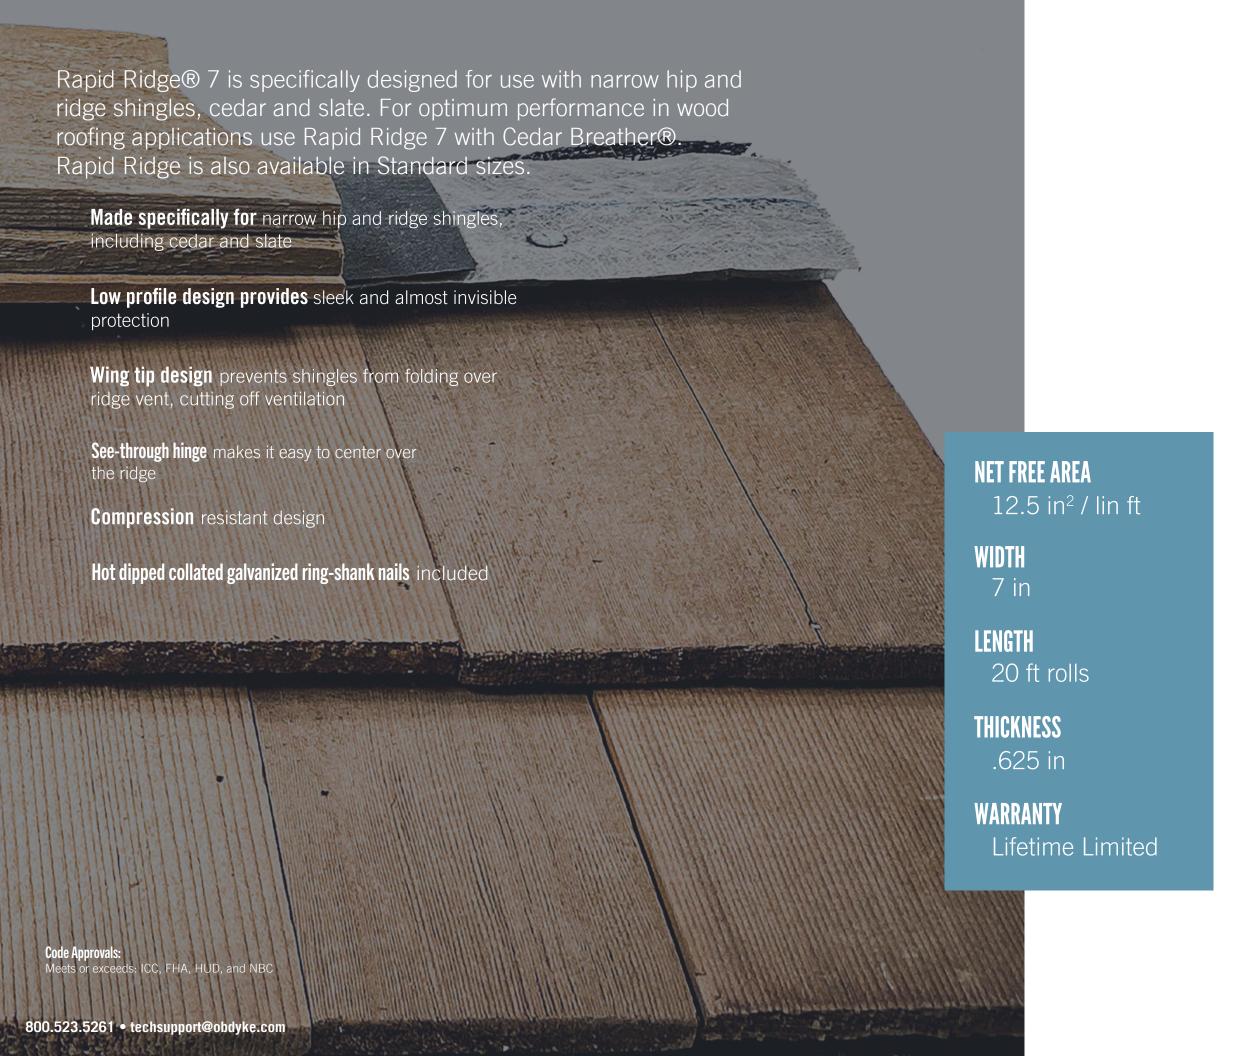





**NET FREE AREA** 

13.5 in<sup>2</sup> / lin ft

WIDTH

10.5 in

LENGTH

20 ft & 50 ft rolls

**THICKNESS** 

.6 in

WARRANTY

Lifetime Limited

Cougar® LP Ridge Vent is an easy to install classic style ridge vent. It can be installed by hand or with a pneumatic nail gun (coil nails are included).

**Low-profile design provides** a sleek and almost invisible protection

End plug free installation saves time by shingling over

Flat back for easy installation

Nail-gunnable for fast installation

Hot dipped collated galvanized ring-shank nails included

Easy to handle, lightweight roll

**Compression** resistant design

Code Approva

Florida Building Code (FL 7751)

Meets or exceeds: ICC, FHA, HUD, and NBC



Meet the best of both worlds. Shark Vent combines the rigidity of a sectional vent, with the fast installation of a roll. Also available in a filtered option for additional peace-of-mind in extreme weather areas.

**Patented internal and external** baffle system prevents wind-driven rain and snow infiltration

**Nail guides, slot guides, and center guide** to simplify the alignment of shingles and nail placement

**New external baffle design** that conforms better to architectural shingles

**Low-profile design** creates a smooth finish and resists cracking in cold weather applications

Hot dipped collated galvanized ring-shank nails included

Easy to handle, lightweight roll

**Compression** resistant design



### **NET FREE AREA**

12 in<sup>2</sup> / lin ft

#### WIDTH

14.75 in

### LENGTH

25 ft rolls

### **THICKNESS**

.625 in

### WARRANTY

Lifetime Limited

#### Code Approvals:

Miami Dade - XLP Only Florida Building Code (FL 7751) - XLP Only Meets or exceeds: FHA, HUD, ICC, MDC and NBC





**NET FREE AREA** 

18 in<sup>2</sup> / lin ft

WIDTH

14.75 in

LENGTH

4 foot sections

**THICKNESS** 

.8125 in

WARRANTY

Lifetime Limited

Xtractor Vent® X18 externally baffled, shingle over ridge vent offers maximum roof ventilation – 18 square inches of net free area per linear foot – for ultimate protection from heat and moisture. X18 is also available with an internal filter option for extra protection against extreme weather, X18 Xtra.

**Integrated end plugs throughout** for structural integrity and to reduce scrap

Pre-drilled nail holes for proper fastening of vent

**Embossed nail lines** for correct nail placement and an embossed center line for proper alignment on the ridge

**External and internal baffles** prevent wind driven rain and snow infiltration

**Maximum ventilation,** 18 square inches of net free area per linear foot

**Compression** resistant design

Narrow 1/8 in. wide vent holes

Available with filter fabic:



Code Approvals:

Texas Department of Insurance Product Evaluation (RV-28) Florida Building Code (FL 7751) Meets or exceeds: FHA, HUD, ICC, MDC and NBC



A low-profile externally baffled ridge vent, Xtractor Vent® XLP works in conjunction with a soffit system to extract heat and moisture out of the attic. XLP ridge vent is designed specifically for fast installation with the use of a nail gun. XLP is also available with an internal filter option for extra protection against extreme weather, XLP Xtra.

**Integrated end plugs throughout** for structural integrity and to reduce scrap

**Embossed nail lines** for correct nail placement and an embossed center line for proper alignment on the ridge

**External and internal baffles** prevent wind driven rain and snow infiltration

Hot dipped collated galvanized ring-shank nails included

Low-profile sectional design

**Compression** resistant design

Nail-gunnable for fast installation



### **NET FREE AREA**

12.75 in<sup>2</sup> / lin ft

## WIDTH

14 in

### LENGTH

4 foot sections

### **THICKNESS**

.625 in

### WARRANTY

Lifetime Limited

Code Approvals: Miami Dade Texas Department of Insurance Product Evaluation (RV-28) Florida Building Code (FL 7751) Meets or exce<u>eds: FHA, HUD, ICC, MDC and NBC</u>

## with Benjamin Obdyke Roof & Wall products **ROOF SYSTEMS** RIDGE VENTILATION PRODUCTS WOOD / METAL ROOF SYSTEM cedar breather® roll vent® rapid ridge® rapid ridge® 7 cougar® lp shark vent® xtractor vent® **WALL SYSTEMS UV-PROTECTED RAINSCREEN SYSTEM RAINSCREEN SYSTEM** AIR BARRIER DRAINABLE HOUSEWRAP SYSTEM invisiwrap® uv slicker® rainscreen hydrogap®sa hydroflash® uv+ flatwrap@hp hydroflash® la hydroflash® slicker® screen



DRAINABLE HOUSEWRAP SYSTEM

hydrogap® drainable housewrap

www.woolfdistributing.com

#### **GREEN BAY, WI**

551 Packerland Dr. **1-920-499-2117** 

Email:

woolfgb@woolfdistributing.com Orders:

order-gb@woolfdistributing.com

#### PEORIA, IL

515 South Maxwell Rd.

1-309-697-1760

Email:

HOUSEWRAP SYSTEM

flatwrap® hp

woolfpe@woolfdistributing.com Orders:

order-pe@woolfdistributing.com

#### WOODSTOCK, IL

batten uv

1625 West Lake Shore Dr.
woolf-ws@woolfdistributing.com
Building Materials: 1-815-477-9680
order-ws@woolfdistributing.com
Millwork: 1-815-356-0438
order-mw@wooldistributing.com
Commercial: 1-815-527-9288
commercialdoors@wooldistributing.com