



# **Woolf Distributing**

### **Dunbarton Adjustable Steel Frame Program**

### **Base Kits**

- FX5 (6'8" and 7'0") and FX19 (8'0")
- 18ga Steel, Bright White Finish, CRS (Cold Rolled Steel)
- 90 Minute Fire Rated (Embossed label)
- USP #5 Hinge Prep: 4" x 5/8" Radius, Non-template

Compatible Hinges:

Penrod 4" Radius Corner ThermaTru Classic Craft ThermaTru Spring ThermaTru Self-Aligned \* \*(Might not be compatible with your door)

- Strike Prep: 2-3/4" Adjustable T-Strike
- DB Strike Prep: 2-3/4" Strike, 5-1/2" On-

#### Center

- Brown weatherstrip
- Accessory Hardware Bag
- Sill (if applicable)
- All Sizes and Prep Locations to ThermaTru U1 Specifications


### **Casing Options**

Our Standard Frames are flat, non-lanced, and ready to accept any wood casing.

Steel casing and retainer clips are available on a special order basis.

### **Closure Kits**

- 22ga or 18ga steel, Bright White Finish, CRS (Cold Rolled Steel)
- Accessory Hardware Bag
- Sill Extender (if applicable)

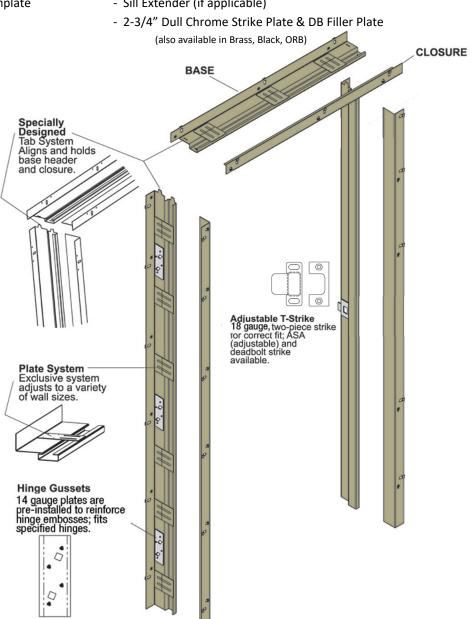





# **Woolf Distributing**

## **Dunbarton Adjustable Steel Frame Program**

### **Sill Options**

**Frame Sizes** 

2' 6"

2' 8"

2' 10"

3' 0"

Width


30 1/16"

32 1/16"

34 1/16"

36 1/16

- Fixed Vinyl Sill
   Riser Included in Base Kit
   Extension Included in Closure Kit
- ADA Sill Included in Base Kit
- No Sill (frame height reduced accordingly)



Fixed Vinyl Riser (Included in Fixed Sill Base Kit)





#### **Aluminum Extension**

(Included in Fixed Sill Closure Kit) 4.5" to 5.5" includes 3-3/4" Extension 5.5" to 6.5" includes 4-3/4" Extension 6.5" to 7.5" includes 5-3/4" Extension 7.5" to 8.5" includes 6 3/4" Extension

## **Standard Hinge & Strike Locations**

	6/8	7/0	8/0
Hng1	8 3/8"	8 3/8"	8 3/8"
Hng2	38 1/8"	40 1/8"	33 3/8"
Hng3	67 7/8"	71 7/8"	58 3/8"
Hng4	х	х	83 7/8"
	(Top of frame to top of hinge)		

Strike 44 3/32" 48 3/32" 60 3/32"

(Top of frame to center line)

Fixed Sill

**ADA Sill** 

No Sill

6' 8"

80 3/4"

80 1/4"

79 5/8"

Height

7′ 0″

84 3/4"

84 1/4"


83 5/8"

8' 0"


96 3/4"


96 1/4"

95 5/8"




4" X 5/8" RADIUS NON-TEMPLATE PATTERN






1 3/4 DOOR ADJUSTABLE STRIKE




ADJUSTABLE STRIKE

# **Closure Kit Actual Depths**

Kit Size	Actual Depth
4 1/2" - 5 1/2"	2"
5 1/2" - 6 1/2"	3"
6 1/2" - 7 1/2"	4"
7 1/2" - 8 1/2"	5"





REDIFLEX CORNER DETAIL