


# CLAM PRO

*Automatic opening  
electromagnet*




- **2 years** guarantee on the machine.
- **10 years guarantee** on heating element.
- **Automatic opening.**
- **Optimum distribution of pressure and heat.**
- **Large plate 40x50cm.**
- **Reversible lower plate 180°**
- **Optimized size and space**
- **« DRY » function for drying direct printing (optional)**
- **Compatible with laser printed paper (heavy pressure)**
- **Manufactured in France.**

*Front slide plate*

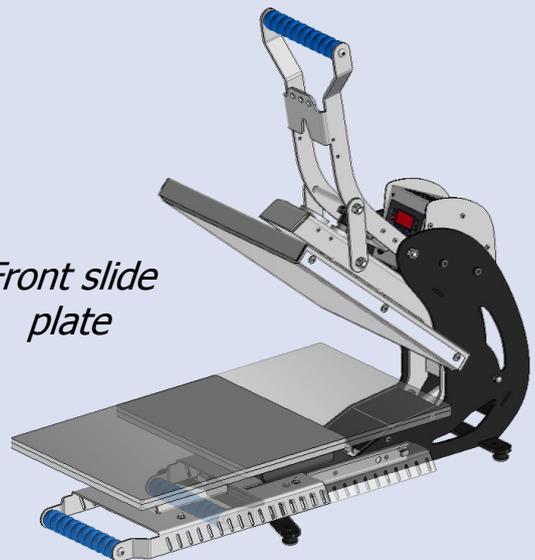

**Table**

## Accessories



**Plate Kit**




**Cover**

## Technical characteristics

Plates Sizes	400 x 500 mm
Weight	57 kg
Pressure	469 gr/cm <sup>2</sup>
Max Temperature	220°C
Power Supply	230 V
Electric Power	2500 W
Amperage	11 A


## Dimensions

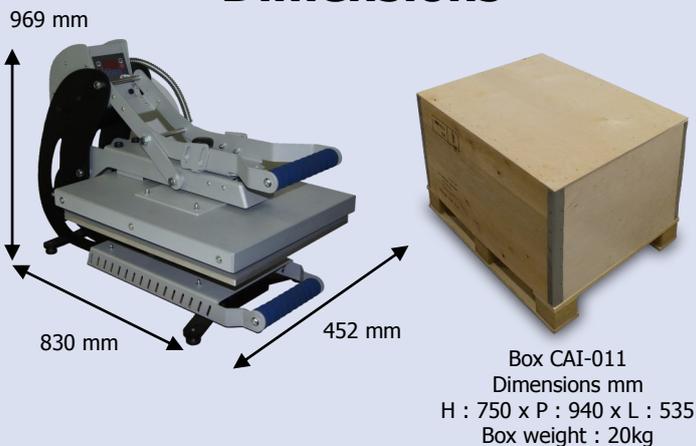

## Accessories



**Table TAB-PRO2-EXT :**  
Strong support table, perfect for Sefa presses  
With retractable extensions on each side



**Plates kit PLA-7A**  
Set of 4 plates,  
Useful for precise work.  
120x80 mm - 150x150 mm  
120x450 mm - 250x300 mm



**Cover HOU-50 :**  
High temperature resistant NO-MEX®  
Softer and gliding surface to easily put your textile on the plate.  
Protecting the foam as well.

## Settings



*Electronics developed by Sefa.*

Accurate and fast regulation (PID control) for a wide range of heat transfer products : Flex, lock, sublimation, screen printing transfer.



### Advanced electronics

Double timer (main + pre-heat)  
2 counters,  
3 programmes  
Power save mode


From 0 to 570 sec (precision +/- 1%).  
From 0 to 220°C (précision +/- 1%).

Temperature rising time from 0 to 180°C : 15 mn.

## Equipments

### Reversible lower plate 180°

*To put T-shirt either from the front or the back of the plate*

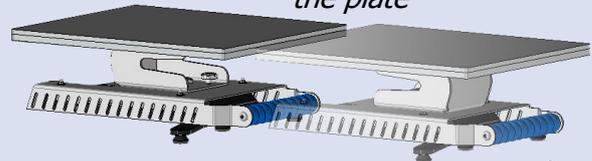


### Front slide plate

*For a complete clearance of the plate*



### « DRY » Function (optional)

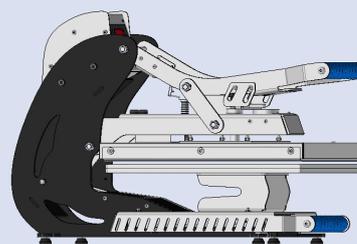

*Contactless approach for direct printing drying*