

# CR.BB.U.AG.RB.3

# Back Bar Refrigerators Refrigerated

Horizontal


**Product Code:**

|    |                          |
|----|--------------------------|
| CR | = Culinaire Refrigerated |
| BB | = Back Bar               |
| U  | = Under Bench            |
| AG | = Aluminium Framed Glass |
| RB | = Remote Control Box     |
| 3  | = 3 Door                 |

**Optional Extras:**
**Frameless Glass Doors**

- Add FG to code CR.BB.U.FG.RB.3

**Stainless Steel Framed Glass Doors,  
Continuous Folded Handle**

- Add SG to code CR.BB.U.SG.RB.3

**Stainless Steel Framed Glass Doors,  
Recessed Handle**

- Add SGR to code CR.BB.U.SGR.RB.3

**Equipment Legs**

 - Add EL to code CR.BB.U.AG.RB.EL.3  
 - Factory fitted

(If Required, must be nominated at time of order)

**Left Hand Services**
**Remote Control Box**

- Add L to code CR.BB.U.AG.RBL.3

**Self Contained**
**Self Contained Right Hand**

- Add SC to code CR.BB.U.AG.SC.3

**Self Contained Left Hand**

- Add SCL to code CR.BB.U.AG.SCL.3

**Technical Data:**

|                              |                         |
|------------------------------|-------------------------|
| Dimensions: W x D x H:       | 1670 x 700 x 960        |
| * Remote Refrigeration Load: | 1250 watts at -10°C SST |
| Refrigerant Type:            | R507 or 404A            |
| Pipe Connection Inlet        | 1/2"                    |
| Pipe Connection Outlet       | 1/4"                    |
| Total Connected Load:        | 0.6kW                   |
| Electrical Connection:       | 240V 1Ø + N + E         |

Note: Refrigeration load is calculated at the cabinet


Due to continuous product research and development, the information contained herein is subject to change without notice

**Product Information:**


- Keeps contents at a cool +1°C to +4°C in 32°C ambient temperature
- Air blown from rear to front over a full length cross fin coil to ensure maximum recovery and even temperature in the busiest environments
- High impact, low energy L.E.D. lighting ensures maximum product visibility
- Aluminum framed low energy double glazed, heated and toughened glass doors are self-closing and self-sealing to ensure ease of operation & improved efficiency (as standard)
- Serviceable heater wire in cabinet fascia to prevent condensation
- Choice of either stainless steel or black internal and external finishes (as standard)
- All doors are left hand hinged with hold open stays, as standard. Contact your local sales rep for other door configurations
- The refrigerator is plinth mounted as standard. 150mm equipment legs available as an optional extra, must be specified at the time of ordering
- All services are at the right hand end of the refrigerator as standard. Can be ordered as left hand by adding "L" to code (refer left hand services)
- Supplied with 4 adjustable shelves per door
- Available in 2-7 doors
- Supplied with a control box for connection to a remote condenser unit to be supplied separately and connected by a qualified refrigeration contractor and electrician
- Condensate is to be plumbed to waste

**Self Contained Refrigerators** (contact your Stoddart representative)


- Self contained refrigerators are available in 2-4 doors
- Condensate is to be plumbed to waste

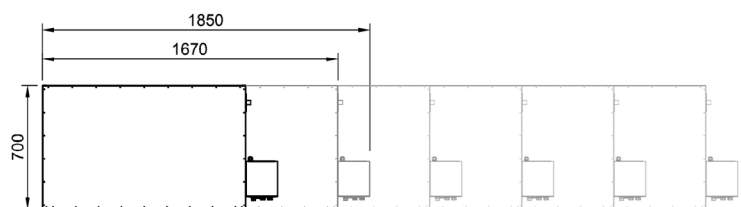

Plan View

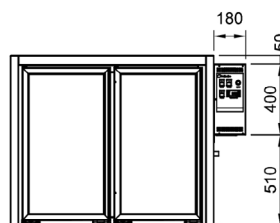

Front Elevation

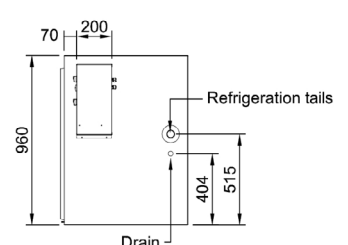

End Elevation


 Proudly Manufactured  
in Australia

**Manufactured By:**

Tom Stoddart Pty Ltd. ABN 16 009690251  
 39 Forest Way, Karawatha 4117 Queensland Australia  
 Tel : +61 7 3440 7600 Fax : +61 7 33441000  
 Web site: www.stoddart.com.au