

# CR.BB.U.AG.RB.5

# Back Bar Refrigerators Refrigerated

Horizontal


**Product Code:**

<b>CR</b>	= Culinaire Refrigerated
<b>BB</b>	= Back Bar
<b>U</b>	= Under Bench
<b>AG</b>	= Aluminium Framed Glass
<b>RB</b>	= Remote Control Box
<b>5</b>	= 5 Door

**Optional Extras:**
**Frameless Glass Doors**

 - Add **FG** to code CR.BB.U.FG.RB.5

**Stainless Steel Framed Glass Doors, Continuous Folded Handle**

 - Add **SG** to code CR.BB.U.SG.RB.5

**Stainless Steel Framed Glass Doors, Recessed Handle**

 - Add **SGR** to code CR.BB.U.SGR.RB.5

**Equipment Legs**

 - Add **EL** to code CR.BB.U.AG.RB.EL.5  
 - Factory fitted

(If Required, must be nominated at time of order)

**Left Hand Services**
**Remote Control Box**

 - Add **L** to code CR.BB.U.AG.RBL.5

**Self Contained**
**Self Contained Right Hand**

 - Add **SC** to code CR.BB.U.AG.SC.5

**Self Contained Left Hand**

 - Add **SCL** to code CR.BB.U.AG.SCL.5

**Technical Data:**

Dimensions: W x D x H:	2710 x 700 x 960
* Remote Refrigeration Load:	2050 watts at -10°C SST
Refrigerant Type:	R507 or 404A
Pipe Connection Inlet	1/2"
Pipe Connection Outlet	1/4"
Total Connected Load:	1.2kW
Electrical Connection:	240V 1Ø + N + E

Note: Refrigeration load is calculated at the cabinet


Due to continuous product research and development, the information contained herein is subject to change without notice

**Product Information:**


- Keeps contents at a cool +1°C to +4°C in 32°C ambient temperature
- Air blown from rear to front over a full length cross fin coil to ensure maximum recovery and even temperature in the busiest environments
- High impact, low energy L.E.D. lighting ensures maximum product visibility
- Aluminum framed low energy double glazed, heated and toughened glass doors are self-closing and self-sealing to ensure ease of operation & improved efficiency (as standard)
- Serviceable heater wire in cabinet fascia to prevent condensation
- Choice of either stainless steel or black internal and external finishes (as standard)
- All doors are left hand hinged with hold open stays, as standard. Contact your local sales rep for other door configurations
- The refrigerator is plinth mounted as standard. 150mm equipment legs available as an optional extra, must be specified at the time of ordering
- All services are at the right hand end of the refrigerator as standard. Can be ordered as left hand by adding "L" to code (refer left hand services)
- Supplied with 4 adjustable shelves per door
- Available in 2-7 doors
- Supplied with a control box for connection to a remote condenser unit to be supplied separately and connected by a qualified refrigeration contractor and electrician
- Condensate is to be plumbed to waste

**Self Contained Refrigerators** (contact your Stoddart representative)


- Self contained refrigerators are available in 2-4 doors
- Condensate is to be plumbed to waste

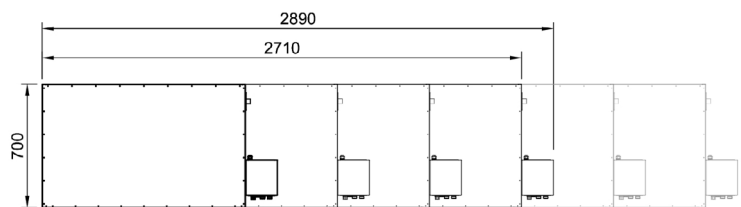

Plan View



Front Elevation



End Elevation


 Proudly Manufactured  
in Australia

**Manufactured By:**

 Tom Stoddart Pty Ltd. ABN 16 009690251  
 39 Forest Way, Karawatha 4117 Queensland Australia  
 Tel : +61 7 3440 7600 Fax : +61 7 33441000  
 Web site: www.stoddart.com.au