

CR.BB.U.AG.RC.PC.7

Back Bar Refrigerators Refrigerated

Horizontal


Product Code:

CR	= Culinaire Refrigerated
BB	= Back Bar
U	= Under Bench
AG	= Aluminium Framed Glass
RC	= Remote Service Compartment
PC	= Powder Coated
7	= 7 Door

Optional Extras:
Frameless Glass Doors

 - Add **FG** to code CR.BB.U.FG.RC.PC.7

Stainless Steel Framed Glass Doors, Continuous Folded Handle

 - Add **SG** to code CR.BB.U.SG.RC.PC.7

Stainless Steel Framed Glass Doors, Recessed Handle

 - Add **SGR** to code CR.BB.U.SGR.RC.PC.7

Equipment Legs

 - Add **EL** to code CR.BB.U.AG.RC.EL.PC.7
 - Factory fitted

(If Required, must be nominated at time of order)

Left Hand Services
Remote Service Compartment

 - Add **L** to code CR.BB.U.AG.RCL.PC.7

Self Contained
Self Contained Right Hand

 - Add **SC** to code CR.BB.U.AG.SC.PC.7

Self Contained Left Hand

 - Add **SCL** to code CR.BB.U.AG.SCL.PC.7

Technical Data:

Dimensions: W x D x H:	4050 x 700 x 960
* Remote Refrigeration Load:	3050 watts at -10°C SST
Refrigerant Type:	R507 or 404A
Pipe Connection Inlet	1/2"
Pipe Connection Outlet	1/4"
Total Connected Load:	1.8kW
Electrical Connection:	240V 1Ø + N + E

Note: Refrigeration load is calculated at the cabinet


Due to continuous product research and development, the information contained herein is subject to change without notice

Product Information:


- Keeps contents at a cool +1°C to +4°C in 32°C ambient temperature
- Air blown from rear to front over a full length cross fin coil to ensure maximum recovery and even temperature in the busiest environments
- High impact, low energy L.E.D. lighting ensures maximum product visibility
- Aluminum framed low energy double glazed, heated and toughened glass doors are self-closing and self-sealing to ensure ease of operation & improved efficiency (as standard)
- Serviceable heater wire in cabinet fascia to prevent condensation
- Choice of either stainless steel or black internal and external finishes (as standard)
- All doors are left hand hinged with hold open stays, as standard. Contact your local sales rep for other door configurations
- The refrigerator is plinth mounted as standard. 150mm equipment legs available as an optional extra, must be specified at the time of ordering
- All services are at the right hand end of the refrigerator as standard. Can be ordered as left hand by adding "L" to code (refer left hand services)
- Supplied with 4 adjustable shelves per door
- Available in 2-7 doors
- Supplied with a remote service compartment for connection to a remote condenser unit to be supplied separately and connected by a qualified refrigeration contractor and electrician
- Condensate is to be plumbed to waste

Self Contained Refrigerators (contact your Stoddart representative)


- Self contained refrigerators are available in 2-4 doors
- Condensate is to be plumbed to waste

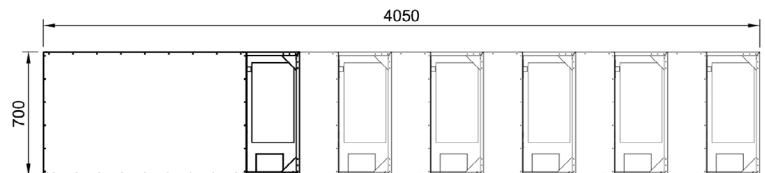

Plan View



Front Elevation

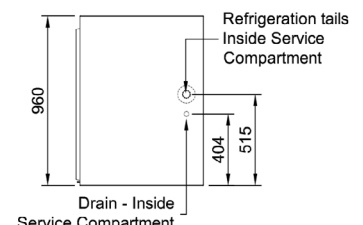

End Elevation


 Proudly Manufactured
in Australia

Manufactured By:

Tom Stoddart Pty Ltd. ABN 16 009690251
 39 Forest Way, Karawatha 4117 Queensland Australia
 Tel : +61 7 3440 7600 Fax : +61 7 33441000
 Web site: www.stoddart.com.au