

Reverse Osmosis (RO) is a water purification technique that reduces the quantity of total dissolved solids (TDS) in water. RO uses waterline pressure to push raw wastewater against a special semi-permeable membrane. Should water pressure drop, the unit has been fitted with an internal booster pump to maintain constant water pressure, ensuring optimal performance. RO is essentially a molecular squeezing process which causes water molecules to separate from the contaminants. The separated water molecules then pass through to the inside of the membrane on to a holding reservoir. The contaminants are washed from the membrane and disposed.



Features and Benefits:

- Sleek and compact stainless steel design. Fits under standard 6 and 10 tray Combi ovens
- Scale inhibitor four action system for the raw water inlet
- Four stages of filtration: "Stage 1" Sediment/Dirt Filter, "Stage 2" Chloride Reduction Filter and "Stage 3" Reverse Osmosis "Stage 4 Water Stabiliser.
- Scale free water for steaming
- TDS meter (included)
- High performance membrane to cater for highly demanding environment.
- Comes fully assembled and pre-plumbed, ready for connection
- Quick installation time of approximately 15 minutes
- Hoses and fittings supplied (plug and play)
- Only four connections: "IN" (Water Inlet from Mains), "APP" (Connection to the appliance), "DRAIN" (Connection to drain/waste water) and "Plug" (10 amp power plug)
- Can be serviced from front of unit without having to disconnect
- Easy cartridge replacement on side
- Internal booster pump to maintain water pressure
- 20 Litre internal storage tank
- WaterMark approved



WaterMark

AS 3497

Lic: 23066

**

Due to continuous product research and development, the information contained herein is subject to change without notice.

Manufactured by:

Tom Stoddart Pty Ltd. ABN 16 009690251
39 Forest Way, Karawatha 4117, Queensland Australia

Tel +61 7 3440 7600, Fax +61 7 3344 1000

Web site: www.stoddart.com.au




Email: info@stoddart.com.au

Specifications:

Construction: Stainless steel 304 grade.
 Water Supply: Single 15mm (1/2" BSP) Stopcock.
 Power Supply: 10Amp GPO
 Unit Fixing: Free standing

Models: SPPL.WF.RO1.20

Code Explanation:
 SPPL = Stoddart Product Plumbing
 WF = Water Filter
 RO1 = Reverse Osmosis Manual TDS Adjustment
 20 = 20 Litre Storage Tank

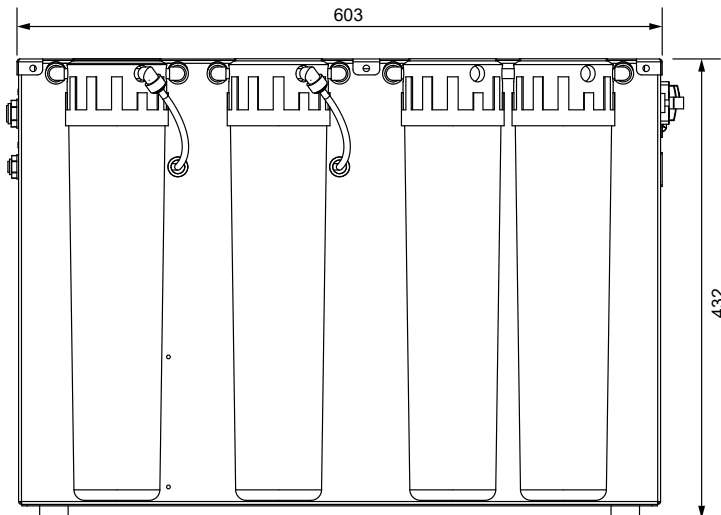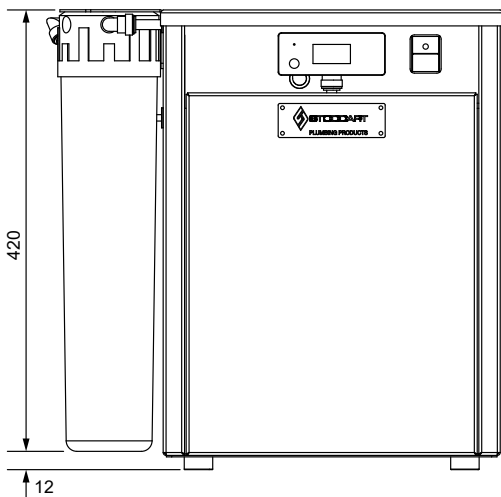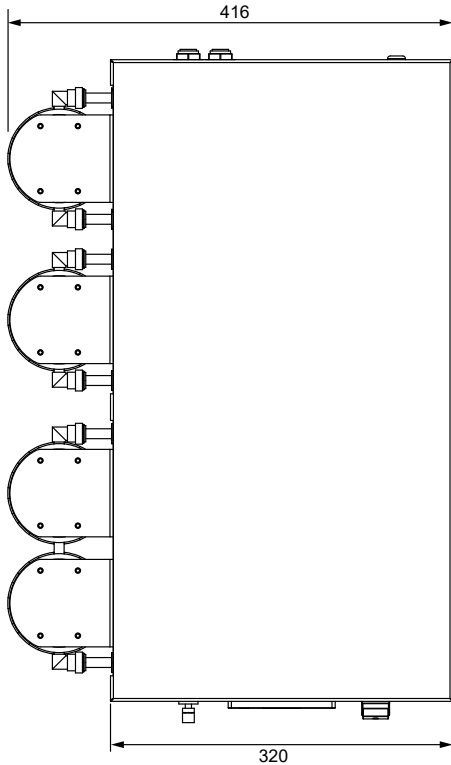

Model No.	Width (mm)	Length (mm)	Height (mm)	Power	Amps
SPPL.WF.RO1.20	416	603	432	240V 50Hz	1.4Amp Single Phase

Due to continuous product research and development, the information contained herein is subject to change without notice.