

Cold Food Displays - Flat Deck

W.CFSSNxx



Product Information:

- Ideal for back of house use in plating and dish assembly
- Supplied with removable acrylic well covers to seal cold well when not in use
- Designed for a maximum of 3 hours continuous use with open well. Lids must be used during service periods
- Unique blown air design passes a cold air blanket over the top of the food. The cold air then returns under and around the food pans creating an even cooling effect
- Complete with hygienic stainless steel top for easy cleaning
- Features a full length evaporator coil. Adjustable digital controller designed to hold temperature accurately between 2°C and 5°C
- Designed to operate in ambient temperatures up to 32°C
- Undermount refrigeration unit supplied with drain hose from well for connection to waste
- Insulated tank with double skin stainless steel construction
- Takes gastronorm pans up to 100mm deep (sold separately)
- Other pan sizes and combinations available
- Wide range of functional accessories available



Note:

- All Woodson units are designed for use with Woodson pans Other suppliers pans may fit, however this is not guaranteed
- Cabinets require ventilation for built in cold displays

Specifications

Model	W.CFSSN23	W.CFSSN24
Height	342mm	342mm
Width	10730mm	1398mm
Depth	800mm	800mm
Power	0.75kW (10A plug & lead fitted)	0.82kW (10A plug & lead fitted)
Gas	R134a	R134a

Model	W.CFSSN25	W.CFSSN26
Height	342mm	342mm
Width	1723mm	2048mm
Depth	800mm	800mm
Power	0.87kW (10A plug & lead fitted)	0.87kW (10A plug & lead fitted)
Gas	R134a	R134a

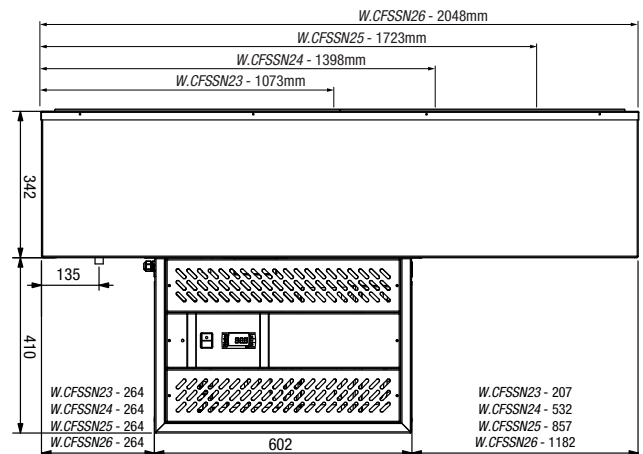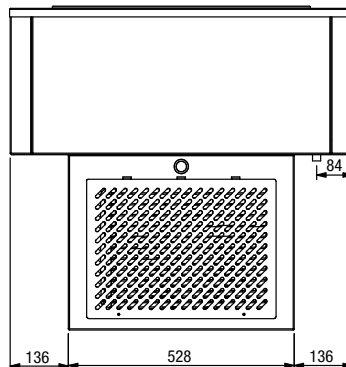

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: B - 27/08/2020

www.stoddart.com.au
www.stoddart.co.nz