

Intelliflush - Urinal Sensor

Model: SPPL.FD.IUFS.x

SPPL = Stoddart Plumbing Product
 FD = Flushing Device
 IUFS = Intelliflush Urinal Flush Sensor
 .x = 1 = Single Feed
 = 2 = Dual Feed
 = 3 = Triple Feed

eg.: for specification and ordering quote


Code: SPPL.FD.IUFS.2

Features and Benefits:

- Mains water supply eliminating the need for a cistern
- No touch, sensor operation
- Microwave sensor designed to penetrate through most roof and wall surface materials including plaster & timber, not including steel
- Concealed installation for vandal resistance
- Single feed compatible with Stoddart Urinals 1800mm long and under
- Dual feed compatible with Stoddart Urinals over 1800mm - 3600mm long
- Triple feed compatible with Stoddart Urinals over 3600mm long
- 24hr hygiene flush to prevent, trap and seal from evaporating
- Adjustable sensor range and flush volume
- Intelligent sensor user count settings to minimise water use



It is advised that access be provided for any future adjustments or necessary servicing requirements.

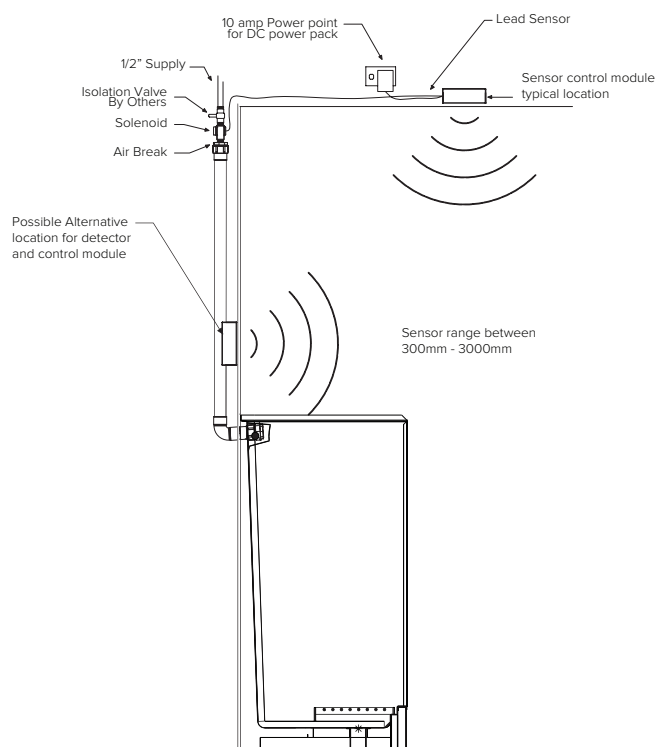

Specifications:

Water Connection: Single 15mm (1/2" BSP)
 Electrical Connection: 10 Amp power point required 2mm from where the sensor is to be installed
 Sensor Range: Between 300mm - 3000mm



Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 19/04/2021

www.stoddart.com.au

www.stoddart.co.nz

