



## Floor Troughs - Straight Length, Box Edge and Square Corners


**Model: SPFT.www.xxx.y.z**

SPFT = Stoddart Plumbing Floor Trough  
 www = Nominated Length  
 xxx = Nominated Width  
 y = E = End Waste  
 = C = Center Waste  
 z = A = Class A  
 = B = Class B  
 = C = Class C  
 = D = Class D

eg.: for specification and ordering quote  
 Code: SPFT.1200.300.E.C

**Features and Benefits:**

- Centre waste troughs <1800mm long can be made flat with cross break to provide some drainage
- Brackets allow fixing to floor & setting level prior to pouring concrete floor (check trench depth)
- The square top edge profile gives best results when concrete is poured in around the trough
- A removable stainless steel perforated basket with solid handle is fitted to recess in trough base
- Order grates with either 10mm apertures for max drainage or 5mm apertures for safety in areas exposed to high heeled shoes
- 316 grade stainless steel option available for optimum corrosion resistance
- Grate options are available for Class A to class D loading
- Optional fastening points can be ordered for securing grates into trough (recommended for wider troughs and security applications)
- Troughs are made to order in Australia & meet Australian Standards

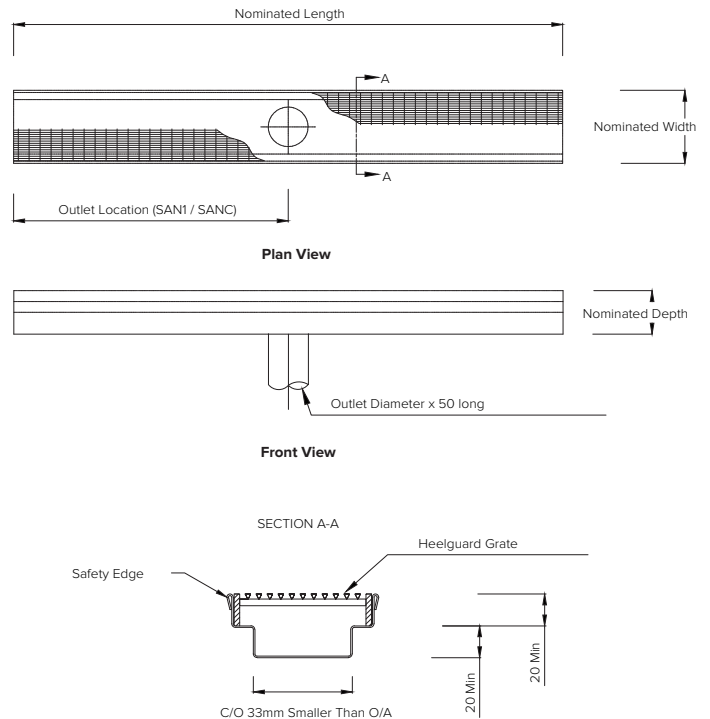

**Specifications:**

Construction: 1.2mm 304 grade stainless steel construction, no.4 satin finish.

Waste Connection: SS waste pipe for fitting into a 100mm outlet. Waste has a removable mesh basket and a fixed mesh strainer.

Unit Fixing: Brackets are fixed in position in trench. Trough is adjusted so top is level & at FFL prior to pouring floor.



Proudly Manufactured in Australia

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 21/06/2021

www.stoddart.com.au  
 www.stoddart.co.nz