



Refrigerated Undercounter 3 Door - 1/1GN

Product Information:

- Monoblock refrigeration system, for improved performance and ease of servicing
- Adjustable digital temperature controller (0°C 6°C)
- Fan forced ducted cooling for uniformed performance throughout the entire refrigerator
- Protective coating on refrigeration coil to help prevent corrosion
- Environmentally friendly R290 Hydrocarbon refrigerant
- Efficient LED lighting for increased product visibility
- Stainless Steel worktop as standard
- 1/1GN shelf configuration with adjustable runners
- 60mm CFC free polyurethane insulation
- Efficient and hygienic cleaning made easy with an innovative internal design
- High quality components including highly efficient compressors and EC fans
- Self-closing, lockable doors
- Supplied on standard and lockable castors for a 840mm finish height. Optional spacer to increase to 900mm working height
- 2 and 4 door models also available, with glass or solid doors



Designed and Engineered in Australia to meet Australian Standards 24 Months on-site parts and labour warranty

Optional Accessories:

- Height increase channel spacer pair (AXR.UCGN.CH) (2 required)
- 1/1GN shelf with runners (AXR.UCGN.SHELFKIT)

Specifications


AXR.UCGN.3 Model W x D x H (mm) 1795 x 700 x 840

Weight 122kg

Packed Dimensions (mm) 1825 x 730 x 880

Packed Weight 146kg 276 Litres **Net Capacity** 0°C - 6°C Operation R290 Refrigerant **Climate Class** Max Ambient 40°C 0.33kW Power 230VAC

10A plug & lead

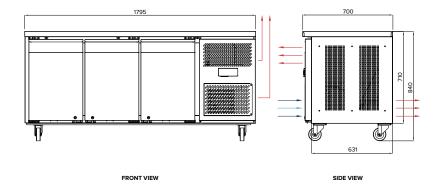

Due to continuous product research and development, the information contained herein is subject to change without notice.



www.stoddart.com.au www.stoddart.co.nz

