



### **Product Information:**

- Unit designed to be installed into a new or existing bench top cut-out.
   Complete with, 2-Tier 304 stainless steel gantry. (Gantry welded to bench top)
- Wet or dry operation (temperature varies greatly when run dry, should not be left unattended for long periods of time)
- Temperature regulation via digital control, designed to hold product between 65°C - 90°C.
- · Independent controlls for baine marie, hot cupboard and gantry
- 2-Tier overhead gantry fitted with Quartz IR heat lamps on the underside of the both shelves
- · Air insulated, double skinned tank for energy efficient heating
- Robust 304 grade stainless steel construction
- Manual fill and manual empty, valve operated waste
- 1/1 GN sized well, fits pans up to 150mm deep (sold separately).
   Supplied with pan dividers
- · 12-month parts and labour warranty



### **Specifications:**

 Model
 CH.BM.D.GDD.4

 W x D x H (mm)
 1477x 647 x 1035

 Cutout Dimensions (mm)
 1455 x 625

Total Connected Load 4.8kW

Electrical Connection 1Ø+N+E 240VAC / 50Hz

(Onsite connection)

Water Connection G 1/2" BSP Waste Connection 11/4" BSP

### **Optional Extras:**

Radius Well

Add **R** to code after the I CH.BM.D**R**.GDD.4

Note: Optional extras must be selected at time of order

## Accessories:


Large Pan Dividers CA.PXL
(To suit large GN pans)


Cross Pan Dividers CA.PXS

(To suit smaller GN pans)

# Legend:

- A Electrical Connection
- **B** Water Connection
- C Waste Connection

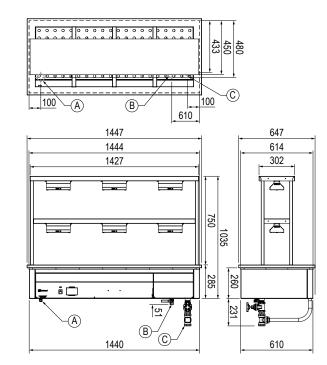



Revision: A - 09/11/2023 - 01







