



### **Product Information:**

- Unit designed to be installed into a new or existing bench top cut-out. Complete with, 2-Tier 304 stainless steel gantry. (Gantry welded to
- Wet or dry operation (temperature varies greatly when run dry, should not be left unattended for long periods of time)
- Temperature regulation via digital control, designed to hold product between 65°C - 90°C.
- Independent controlls for baine marie, hot cupboard and gantry
- 2-Tier overhead gantry fitted with Quartz IR heat lamps on the underside of the both shelves
- Air insulated, double skinned tank for energy efficient heating
- Robust 304 grade stainless steel construction
- Manual fill and manual empty, valve operated waste
- 1/1 GN sized well, fits pans up to 150mm deep (sold separately). Supplied with pan dividers
- 12-month parts and labour warranty



#### **Specifications:**

Model CH.BM.D.GDD.7 W x D x H (mm) 2497 x 647 x 1035 **Cutout Dimensions (mm)** 2475 x 625

**Total Connected Load** 

8.25kW **Electrical Connection** 3Ø+N+E 400VAC / 50Hz

(Onsite connection)

G 1/2" BSP Water Connection 11/4" BSP **Waste Connection** 

# **Optional Extras:**

Radius Well

CH.BM.DR.GDD.7 Add R to code after the I

Note: Optional extras must be selected at time of order

## **Accessories:**

CA.PXL Large Pan Dividers

(To suit large GN pans)

Cross Pan Dividers CA.PXS


(To suit smaller GN pans)


## Legend:

**Electrical Connection** 

Water Connection

Waste Connection

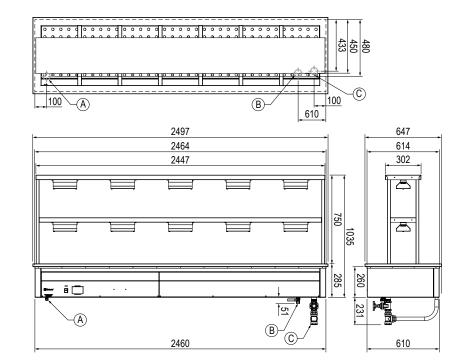



Revision: A - 09/11/2023 - 01





