

KMEST.0606

Dynamic Combi Oven - Stacked Electric, 6 x 1/1 GN + 6 x 1/1 GN






Product Information:

- Compact unit at only 519mm wide (30% less space required than traditional ovens)
- Highly efficient instant steam injection oven
- · Controlled humidity in the cooking chamber
- Innovative touch screen interface
- One Touch function for easy, icon controlled cooking
- Over 120 pre-set cooking programs, 1,000+ additional programs - 9 phase memory available
- Automatic, adaptive cooking, rack control, regeneration, sous vide and smoking programs
- Easy Service function and Recipe tuner as standard
- 3-speed inverter controlled fan for increased precision, control and reliability
- LED lighting for superior cavity illumination
- USB connection and core probe
- Oven cleaning system with liquid, via intergrated dispenser
- Left hand hinge door option available
- All combi ovens are supplied with either Standard or Reverse Osmosis Filtration system
- 24-month warranty (Terms and conditions apply)

General Drawing:

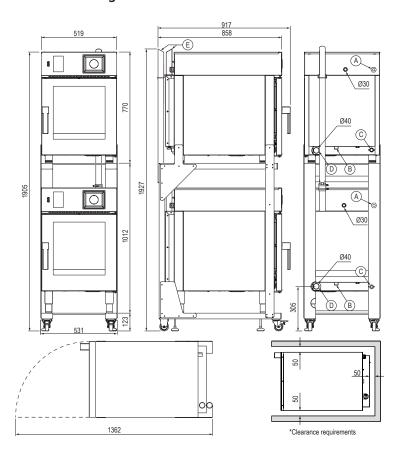

Specifications Stacked:

Standard Filter KMFST.0606.SF Reverse Osmosis KMEST.0606.RO **W x D x H (mm)** 531 x 917 x 1927* * Dimensions do not include water filtration system Weight 195kg **Total Power** 13.8kW 3Ø + N + E

Specifications Oven:

| Standard Filter | KM061WT.SF | KM061WT.SF |
|-------------------------------|---|---|
| Reverse Osmosis | KM061WT.RO | KM061WT.RO |
| Capacity | 6 x 1/1 GN Pans | 6 x 1/1 GN Pans |
| Electrical Connection | 3Ø + N + E 415VAC / 50Hz / 6.9kW OR 1Ø + N + E 240VAC / 50Hz / 6.9kW | 3Ø + N + E 415VAC / 50Hz / 6.9kW OR 1Ø + N + E 240VAC / 50Hz / 6.9kW |
| Cold Water Connection | 3/4 BSP 150-350 kpa Min 10°C - Max 30°C | 3/4 BSP 150-350 kpa Min 10°C - Max 30°C |
| Water Quality Requirements | Hardness: 60-100ppm TDS: <100mg/L Cl Chloride: <32mg/l | Hardness: 60-100ppm TDS: <100mg/L Cl Chloride: <32mg/l |

Legend:

| Α | Electrical Connection |
|---|---------------------------------------|
| В | Steam Generation Water Inlet 3/4" BSP |
| С | Wash System Water Inlet 3/4" BSP |
| D | Drain Connection 32mm |
| E | Humidity Vent |
| F | Detergent Line Inlet |
| | |

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 29/02/2024 - 01

www.stoddart.com.au www.stoddart.co.nz



