

Maxi Step Urinal

Model: SPPL.UR.G.MS.xxxx.yy

SPPL = Stoddart Plumbing Product
 UR = Urinal
 MS = Maxi Step
 xxxx = Nominated Length
 yy = T = top entry water supply
 = R = rear entry water supply
 = L = left end waste
 = R = right end waste

eg.: for specification and ordering quote


Code: SPPL.UR.G.MS.1500.TL

***L & U shaped configurations available.**




Features and Benefits:


- Fully supported on legs for easy installation (no need to fill void under trough with slurry)
- 600mm depth sides for superior hygiene
- Concealed vandal resistant sparge to ensure proper wash with each flush
- The unit can be set into floor (recessed so the top grate is flush with floor), or set on floor (can be fitted with optional stainless steel front kick panel)
- Stainless steel grate is high strength, slip resistant, and hinged for cleaning access
- Internal corners have large radius for easy cleaning and effective drainage
- Fall to waste of 1:80 ensures proper drainage
- Compressed fibre-cement backing provides 'anti-drum' noise suppression
- Optional freestanding finished end panels available where there are no walls
- Top edge can have either returned finished edge or tile edge
- Custom lengths available

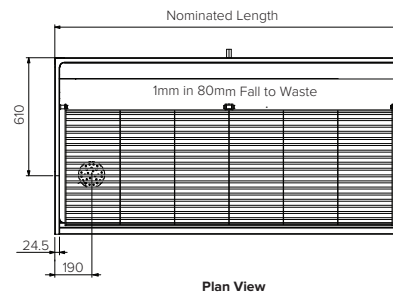

Plan View

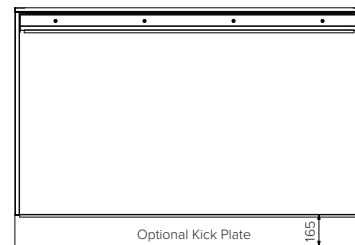

Front View



End View

Specifications:

- Construction:** Fully welded 1.2mm thick 304 stainless steel construction, no.4 satin finish.
- Water Connection:** Top entries in $\varnothing 25$ and $\varnothing 38$ dia. Rear entry in 25mm pressure pipe. Custom inlet positions available. Designed for WELS approved flush devices.
- Waste Connection:** 50mm to 100mm dropper outlets available. Custom waste positions available.

Sold Separately

Flushing Device Options:



FD.CI.PC



FD.EUFS.MIC



Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 9/05/2024

www.stoddart.com.au
www.stoddart.co.nz