



TASK CHAIR ASSEMBLY INSTRUCTIONS

1. Insert cylinder into base and remove red cap.

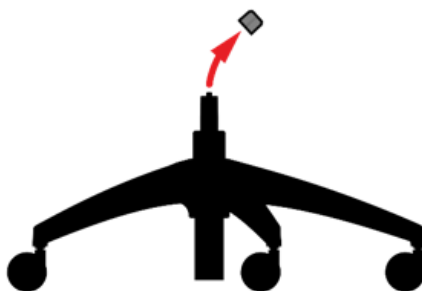

3. Place chair frame onto base assembly.

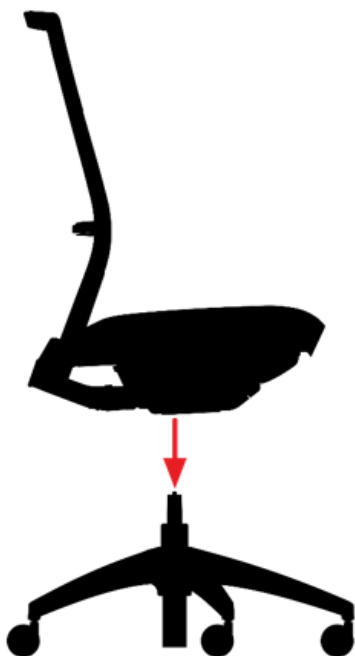

4. Apply downward force to the seat to affix the chair frame to the base assembly.



WARNING

Failure to install product as instructed, use of hardware other than that which is provided, or failure to comply with instructions can result in product failure, personal injury, or property damage.