

MultiSync® PN-P Series Large Format Displays

PN-P556



Say goodbye to dull, inconsistent displays

Professionally Crafted for High-Impact Messaging

The Sharp MultiSync® PN-P Series is your trusted choice for bold, ultra-reliable digital signage—built to perform in environments with higher ambient lighting and extended runtime needs such as healthcare, command centers, finance, retail, and corporate settings. Featuring factory-calibrated color precision, flexible performance options, and a tough all-metal chassis, these displays deliver stunning visuals and commercial-grade durability straight out of the box.

Key Pain Points—Solved

Tired of inconsistent colors across displays? SpectraView™ Engine gives you pixel-perfect factory calibration and pro-level customization.

Looking for more accurate color reproduction? These displays have wide color gamut panels, allowing you access to a broader range compared to standard displays. This will give you more accurate color reproduction for retail, corporate or education branding.

Dealing with outdated or clunky setups? Enjoy seamless modular upgrades with Intel® SDM and Raspberry Pi Compute Module 4 support.

Struggling with overheating or display dimming? Smart cooling tech keeps your visuals bright and your system protected.


Need 24/7 uptime in tough environments? Full metal build, active cooling, and secure LAN controls ensure long-term reliability.

High-End UHD Visuals, All Day, Every Day

Get next-level clarity with native 3840 x 2160 resolution and anti-glare, high-haze glass across the entire PN-P Series lineup. Imagery and messaging can become more vivid and lifelike than ever before! Additionally, these models boast an impressive 700 cd/m² in brightness, ensuring that your message cuts through—even in high-ambient light spaces.


Consistent Color with SpectraView™ Engine

Pre-calibrated for luminance, white point, gamma, and uniformity, every PN-P display features SpectraView Engine Technology and is ready to go, right out of the box. Want deeper control? Through the SpectraView Engine, dial in white point with adjustments of 100k, select brightness based on luminance level, or even input your own CIE color coordinates, giving users capabilities like never before. Bonus: backlight stabilization keeps your visuals looking fresh longer - no early fade-outs here. *All of these features are specifically engineered to give you the best visual quality for an extended duration.*

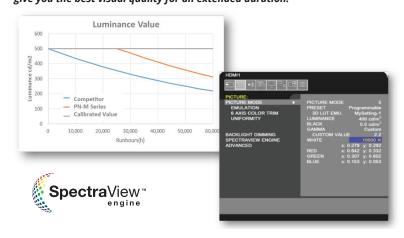

Smarter Daisy Chaining & Multi-Display Sync

Connect up to 4 independent displays from one source thanks to DisplayPort 1.4 connectivity and HBR3 capabilities with Multi-Stream Transport (MST*). MST capabilities can drive up to 4 independent displays from a single DisplayPort source by multiplexing several video streams into a single stream and sending it to the display that then acts as a branch device to demultiplex the signals into the original streams -ideal for menu boards, video walls, and synchronized signage. Additionally, the display can daisy chain the LAN connection, which allows for the pass-through of RS-232C, TCP/IP and IR communications. This gives the customer the ability to control full arrays of displays remotely or via the IR remote control, streamlining the ease of use to the customer.

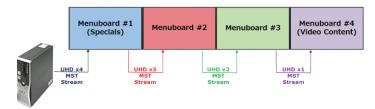

*MST capabilities depends on the video card driving the system.

Power, Connect, Control—Simplified

Each PN-P product features an integrated USB hub, with a USB-C input that supports both DP-Alt mode and upstream data transfer. It includes two downstream USB ports (one USB-A and one USB-C) for connecting and managing peripherals. This built-in hub reduces the need for additional equipment, lowering overall setup costs. Additionally, the USB-C input provides 65W of Power Delivery, enabling devices like laptops to charge directly from the display—ideal for huddle spaces and presentation environments.




Commercial Toughness You Can Trust

A full-metal chassis, carrying handles, and active cooling system mean it's ready for harsh environments without compromising the sleek design. Integrated temperature sensors keep your brightness consistent without thermal dimming - your content stays front and center, even in the harsher conditions found in commercial environments.




Built for Flexibility

The MultiSync PN-P Series is **modular by design**, ready to integrate Intel® Smart Display Modules (SDM-L/SDM-S) and Raspberry Pi Compute Module 4 for embedded intelligence without external gear or messy cabling. Through clever mechanical and electrical design, the PN-P Series allows for sleek all-inone intelligence and interoperability in a small form factor setting, giving you everything you need for digital signage applications while also offering the ability to enhance your screen through multiple integrated professional technologies - all while simplifying installations and allowing for clean and easy set-up.

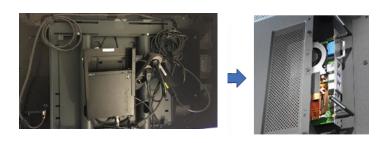

Built-in Security for IT Peace of Mind

With IEEE802.1x authentication via the LAN connection, SSL/TLS browser control, LAN and USB port disabling, and MAC/IP filtering, the MultiSync PN-P Series helps keep your network secure and locked down.

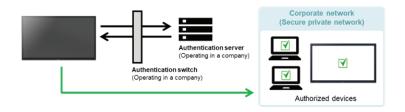

Total Control with NaViSet Administrator™

Remotely manage all your PN-P Series - and other Sharp or NEC displays - from a single, centralized dashboard using **NaViSet Administrator 2**™. Perfect for multi-display setups, this free tool lets you monitor status, automate tasks, generate reports, and make on-demand changes from anywhere. Want even more power? Upgrade to the **Server Edition** for enhanced features and full remote access across your ecosystem.





Smart Input Prioritization

Auto-switch between up to three prioritized inputs or power on with a live signal - no more blank screens or manual resets. If a primary source goes down, the display will automatically switch to whatever the customer has prioritized next. The first detect option also allows for the display to automatically switch to any source that plugs into it, allowing the display to wake on any synced signal.

Typical Display



PN-P Series



First Detect




Bottom Line:


The Sharp MultiSync PN-P Series brings next-gen display power, all-day reliability, and built-in flexibility—wrapped in a clean, modern design that makes your content pop. Whether you're running a control room or creating an unforgettable retail experience, the PN-P Series is here to boost your signage game and keep it fresh 24/7.

PNP506 Specifications

	1121.6 (PN-P506)	
645.2 (PN-P506)		
-		

Bottom Panel
023456789/0008
_
Input Panels Side Panel
1. USB-A (Service)
2. Audio Mini Jack Out
3. LAN1 (Control In) 4. LAN2 (Control Out)
5. IR Remote IN
6. HDMI IN2
7. HDMI Out
8. HDMI IN1 (ARC)
9. DisplayPort In
10. DisplayPort Out 11. LISR-C1 (Unstream DP-Alt Mode 65W PD)
11. USB-C1 (Upstream, DP-Alt Mode, 65W PD) 12. USB-A (2.0/3.2 Gen1, Downstream)
13. USB-C2 (2.0/3.2 Gen1, Downstream)
14. RS-232C In

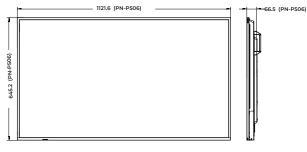

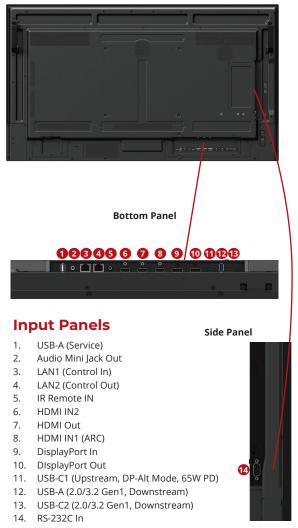









All SDM Option Cards, Raspberry Pi Compute Module 4 with optional NEC Interface Board, Human Sensor (PN-KTRC3) OTHER ACCESSORIES The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons 3.0 Attribution License. Sharp, MultiSync, NaViSet and TileMatrix and all related trademarks are trademarks or registered trademarks of Sharp Corporation and/or its affiliated companies. The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks or tegistered trademar



MODEL

LCD MODULE

CONNECTIVITY

POWER CONSUMPTION

PHYSICAL SPECIFICATIONS

SENSORS

ENVIRONMENTAL CONDITIONS

LIMITED WARRANTY

ADDITIONAL FEATURES

SHIPS WITH

Panel Technology

Viewable Image Size Native Resolution

Brightness (Typical)

Viewing Angle Aspect Ratio

Color Gamut Displayable Colors

Orientation

Digital

Analog

Audio

Digital

Analog

Audio External Control

On (Typ/Max Brightness/ All Max)

Network Standby

Normal Standby Current Rating

Speaker Rating

stand: W x H x D)

Net Weight

Bezel Width (L/R, T/B)

Net Dimensions (Without

VESA Hole Configuration

Ambient Light Sensor

Temperature Sensor

Operating Humidity Operating Altitude

Operating Temperature

Human Sensor

NFC Sensor

Input

Terminals

Output

Terminals

Panel Haze (%)

External Control

Contrast Ratio (Typical)

PN-P556

IPS 54.6"

3840 x 2160

700 cd/m²

1200:1

178° Vert., 178° Hor. (89U/89D/89L/89R) @ CR>10

16:9 92% DCI

Over 1.07 Billion (10bit dithered)

Landscape and Portrait (CCW Rotation)

HDMI 2.0 x2, DP 1.4 2, USB-C (Upstream with DP-Alt Mode and 65W Power Delivery)

N/A

N/A

LAN (100Mbit), 3.5mm Mini Jack IR Remote, RS-232C USB-C (Upstream with DP-Alt Mode and 65W Power Delivery), USB-A 2.0 (Service), USB-A (Downstream), USB-C (Downstream)

HDMI x1, DisplayPort x1 (Carries DP or DP-Alt signals via USB-C)

N/A

3.5mm Mini Jack

LAN (100Mbit, carries RS-232C and IR)

115W/180W/365W 0.5W

4.1A - 1.7A @ 100V - 240V

Optional through SP-RM3a

11.0mm/11.0mm, 11.0mm/13.9mm

1121.6 x 645.2 x 66.5mm

4 x M6 (300 x 300)

Integrated Optional through PN-KTRC3

Integrated and programmable; linked to cooling fans

N/A

0 to 40C

20-80%

3000m (9843ft)

3 years Advanced Replacement

3 years Advanced Replacement

AMX Support, Automated Email Alert Function, CEC Support through HDMI, Crestron Connected V2 Support with XiO Cloud, IEEE802.1x Wired Network Authentication, SSH, Naviset Secure, Signed FW upon Install, Admin Login, IP Address Filtering, SMAC Address Filtering, SMMP V1/2/3, USB/LAN Lockout Capability, PD Comms Tool Support, NEC Firmware Update Tool, Display Browser Control, Display Wall Calibrator Compatible, HDR Support (PQ, HLG, HDR10), Key Guide, NaViSet Administrator 2 Compatible, OSD Rotation for Portrait Orientation, SDM Compatible, PLink Support, USB Power Delivery via USB-C (65W), Raspberry Pi Compute Module Compatible, Real Time Clock, Local Dirmming, Multi Picture Mode, SpectraView Engine Technology, Quick Input Change, Quick Start, Internet Time Server, Auto ID/IP Settings, Energy Star 8.0

AC Power Cord, 2.0m HDMI Cable, IR Remote Control,

Batteries, AAA batteries

20.5kg