

So functional, so smart, so fitting



smart **b**usiness **p**artner

Unified Cloud Connection

Sign in just once on the MFD to connect to multiple cloud services, such as Microsoft Teams. Downloading apps from the cloud is easy. And updates are displayed clearly, so you're always using the latest version of services.

Solid Security

The BP-C533WD has multiple levels of security to protect itself—and your data. When booting up, the MFD checks for anomalies in the BIOS firmware. And optional software prevents attacks on connected devices.

Link Mobile Devices

Mobile devices installed with the Sharpdesk Mobile app can connect directly to the MFD for printing or downloading scanned data. The MFD is also equipped with AirPrint and the Sharp Print Service Plugin.

Wireless LAN Connection

The BP-C533WD works with the 5 GHz band to ensure minimal radio interference and stable high-speed communications. The MFD also supports Wi-Fi Protected Setup™, so it can connect to a wireless LAN without the need for an SSID and security key.

7.0-inch Full-flat Touchscreen

With a variety of functions accessible via simple, intuitive icons, MFD operation is smooth and easy.

High-performance DSPF

The DSPF (duplex single pass feeder) scans both pages of two-sided documents in one pass—in batches of up to 100 sheets. With scanning speeds of up to 130 opm* (two-sided), the MFD is quick to finish even large jobs. A dedicated business card feeder on the DSPF scans batches of up to 25 cards.

Smart Scanning


Simply tap the Auto Set button and the BP-C533WD will automatically determine the optimal resolution, gradation, and compression rate for your scan jobs. It also automatically reorients pages right side up and corrects any skewed sheets.

On-screen System Information

The LCD shows the state of your MFD, displaying current operation and notifications for things like paper, toner, and maintenance.

* Originals per minute; when feeding A4 sheets.

SYSTEM CONFIGURATION

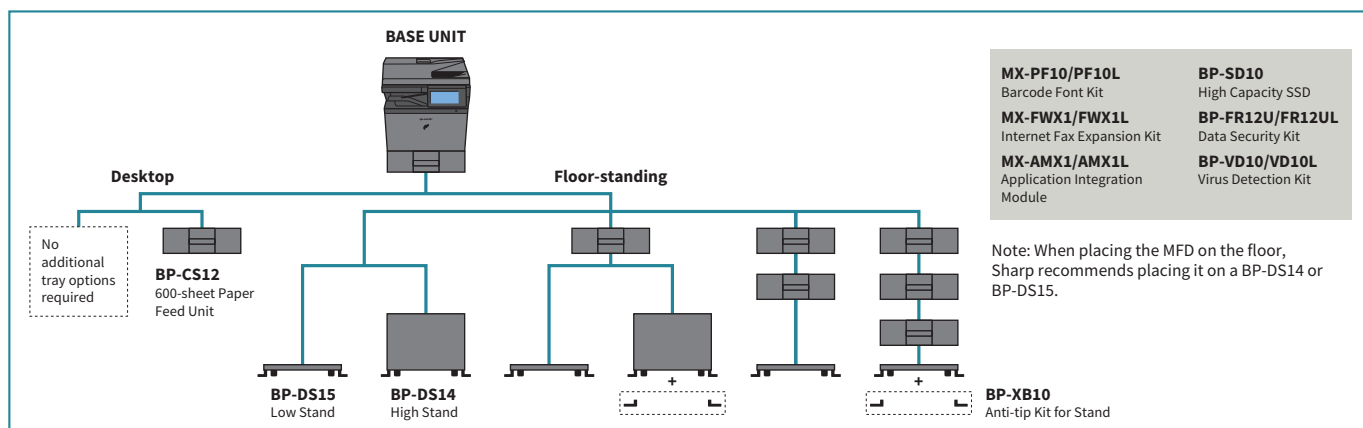

SPECIFICATIONS

General

| | |
|---------------------------------------|---|
| Type | Desktop |
| Engine speed | A4 ^{*1} : Max. 33 ppm |
| Control panel display | 7.0-inch colour LCD touchscreen |
| Paper size | Max. A4, min. A6 |
| Paper capacity (80 g/m ²) | Standard: 550 sheets (500-sheet tray and 50-sheet multi-bypass tray) Maximum: 2,350 sheets (550 sheets & optional 600-sheet tray x 3) |
| Paper weight | Tray 1: 60 g/m ² to 176 g/m ² Trays 2-4 (BP-CS12): 55 g/m ² to 220 g/m ² Multi-bypass tray: 55 g/m ² to 220 g/m ² |
| Warm-up time ^{*2} | 16 sec. |
| Memory | Standard: 5 GB (copy/print shared) 128 GB SSD ^{*3*4} Option: 512 GB SSD ^{*3*4} |
| Power requirements | Rated local AC voltage ±10%, 50/60 Hz |
| Power consumption | Max. 1.84 kW (220 V to 240 V) |
| Dimensions (W x D x H) ^{*5} | 491 x 610 x 602 mm |
| Weight (approx.) | 40 kg |

Copier

| | |
|-------------------------------|--|
| Original paper size | Max. A4 |
| First copy time ^{*6} | Colour: 6.7 sec. B/W: 5.5 sec. |
| Continuous copy | Max. 9,999 copies |
| Resolution | Scan: 600 x 600 dpi, 600 x 400 dpi Print: 600 x 600 dpi, 9,600 (equivalent) x 600 dpi (depending on copy mode) Equivalent to 256 levels |
| Gradation | 25% to 400% (25% to 200% using DSPF) in 1% increments |
| Zoom range | Metric: 10 ratios (5R/5E), inch: 7 ratios (4R/3E) |
| Preset copy ratios | |

Scanner

| | |
|---|---|
| Scan method | Push scan (via control panel) Pull scan (TWAIN-compliant application) |
| Scan speed ^{*7} (colour & B/W) | One-sided: Max. 65 originals/min. Two-sided: Max. 130 originals/min. |
| Resolution | Push scan: 100, 150, 200, 300, 400, 600 dpi Pull scan: 75, 100, 150, 200, 300, 400, 600 dpi 50 dpi to 9,600 dpi via user setting ^{*8} |
| File formats | TIFF, PDF, PDF/A-1a, PDF/A-1b, encrypted PDF, XPS, compact PDF ^{*9} , JPEG ^{*9} , searchable PDF, OOXML (docx, xlsx, pptx), text (TXT [UTF-8]), rich text (RTF) Email/desktop ^{*10} /FTP server/network folder (SMB)/USB drive/local drive |
| Scan destinations | |

^{*1}: Short-edge feeding.

^{*2}: In a standard measurement environment. May vary depending on operating conditions and environment.

^{*3}: Storage capacity depends on procurement and sourcing status.

^{*4}: Replacing the standard-equipped SSD with the optional BP-SD10 increases storage capacity to 512 GB.

^{*5}: Including protuberances.

^{*6}: Short-edge feeding of A4 sheets from 1st paper tray, using document glass, without Auto Colour Selection and Auto Colour mode, MFD in fully ready condition. May vary depending on operating conditions and environment.

^{*7}: Based on Sharp's A4 standard chart, using document feeder, short-edge feeding, and factory default settings with Auto Colour Selection off. Scan speed will vary depending on the type of document and the scan settings.

^{*8}: Resolution will vary depending on the size of the scanned area.

^{*9}: Colour/greyscale only.

^{*10}: Requires Network Scanner Tool Lite.

^{*11}: Storage capacity will vary depending on the type of document and the scan settings.

^{*12}: Output speed is lower when resolution is set at 1,200 x 1,200 dpi.

^{*13}: Based on Sharp's standard chart with approx. 700 characters (A4 short-edge feeding) at standard resolution in Super G3 mode, 33,600 bps, JBIG compression.

Document Filing

| | |
|---|--|
| Document filing capacity ^{*11} | [Standard] Main and custom folders: Max. 5,000 pages or 500 files Quick file folder: Max. 5,000 pages or 500 files [Option] Main and custom folders: Max. 20,000 pages or 3,000 files Quick file folder: Max. 10,000 pages or 1,000 files |
| Stored jobs | Copy, print, scan, fax |
| Storage folders | Quick file folder, main folder, custom folder (max. 1,000 folders) |

Printer


| | |
|--------------------|--|
| Resolution | 1,200 x 1,200 dpi ^{*12} , 600 x 600 dpi, 9,600 (equivalent) x 600 dpi |
| Interface | USB 2.0 (host, high-speed), USB 3.0 (host, super speed), 10Base-T/100Base-TX/1000Base-T, wireless LAN (IEEE 802.11 a/b/g/n/ac) |
| Supported OS | Windows Server 2016, Windows Server 2019, Windows Server 2022, Windows 10, Windows 11, Mac OS 10.15, 11, 12, 13, 14, 15, 26 |
| Network protocols | TCP/IP |
| Printing protocols | LPR, Raw TCP (port 9100), POP3 (email printing), HTTP, FTP for downloading print files, IPP, IPP Everywhere, SMB, WSD |
| PDL | PCL 6 emulation, Adobe PostScript 3 |
| Available fonts | 80 fonts for PCL, 139 fonts for Adobe PostScript 3 |

Facsimile

| | |
|-------------------------|--|
| Compression method | MH/MR/MMR/JBIG |
| Communication protocol | Super G3/G3 |
| Transmission time | Less than 3 seconds ^{*13} |
| Modem speed | 33,600 bps to 2,400 bps with automatic fallback |
| Transmission resolution | From Standard (203.2 x 97.8 dpi) to Ultra Fine (406.4 x 391 dpi) |
| Recording size | A4 to A5 |
| Memory | 4 GB (built-in) |
| Greyscale levels | Equivalent to 256 levels |

• Design and specifications are subject to change without prior notice.

• Microsoft Teams, Windows, and Windows Server are trademarks of the Microsoft group of companies. AirPrint and Mac are trademarks of Apple Inc., registered in the US and other countries. Wi-Fi Protected Setup is a trademark of Wi-Fi Alliance®. PCL is a registered trademark of Hewlett-Packard Company. Adobe and PostScript are either registered trademarks or trademarks of Adobe in the US and/or other countries. All other brand names and product names may be trademarks or registered trademarks of their respective owners.

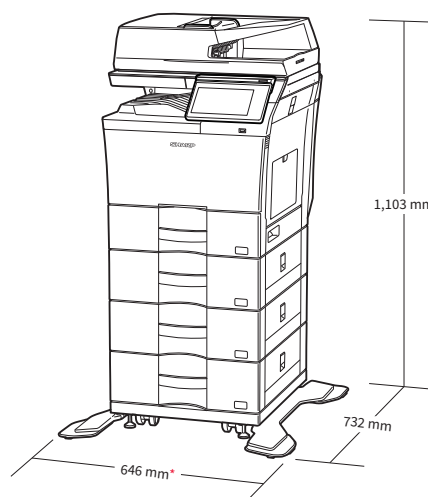

* 736 mm when the Anti-tip Kit for Stand is attached and the multi bypass tray is extended.

Shown with optional equipment.

SHARP

Distributed by:

SHARP CORPORATION OF AUSTRALIA PTY LTD

ABN 40 003 039 405

P.O. Box 84, Macquarie Park, NSW 2113

Tel: 1300 135 022

www.sharp.net.au

©SHARP CORPORATION (DEC.2025)