

TN 5800 TN 6400 TC 5800 F TC 6400 F

ACTIO™-Full chassis with oscillation • Steering wheels • Front and rear final drive

4 equal wheel drive		4 unequal wheel drive	
Direct injection	Direct injection	Direct injection	Direct injection
• Counter rotating		• Counter rotating	
Stage 3A	Stage 3A	Stage 3A	Stage 3A
4	3 Turbo	4	3 Turbo
2188	2082	2188	2082
36,5/49,7	41,2/56	36,5/49,7	41,2/56
3000	2600	3000	2600
139/1800	195/1400	139/1800	195/1400
Water	Water	Water	Water
42	42	42	42
Synchronized 24 speed gear box: 12 forward and 12 reverse with inverter			
Independent, with mechanic control, standard speed 540 rpm and synchronized			
3-points hitch Cat. 1 - Capacity (Kg): 2200			
130	130	130	130
Hydraulic with 2 double acting pistons with "Load Sensing" system			
Mechanic rear oil bath disc brakes - Steering brakes			
Rear axle and parking handbrake with control lever operating the main device			
1630	1650	1760	1780

Standard Features

- Front and rear differential locks, foot lock, with mechanic control
- Adjustable suspension seat
- Safety belts
- Rear adjustable height tow hitch
- Front tow hitch
- Foldable protection roll bar
- Adjustable wheel rims
- Horn
- Lights, braking and turning indicators
- Unipolar socket and 7 way trailer socket
- Series of control lights
- Tachometer/revolution counter
- Safety starting switch
- Battery isolation switch


Optional Features

- Hydraulic power lift with draft and position control
- PTO at 540 and 1000 rpm
- Rear revolving working light
- 4 types of ancillary hydraulic systems with single-acting and double-acting manifolds (up to 5 rear quick couplers)
- Steering column adjustable in tilt
- Digital speedometer
- Pneumatic suspension seat
- Wheel ballasts
- Cast iron wheel flanges for 20" rear wheels (only for TC F)


TCF



DIMENSIONS: TN

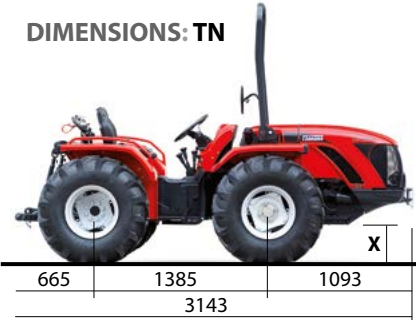

DIMENSIONS: TC F

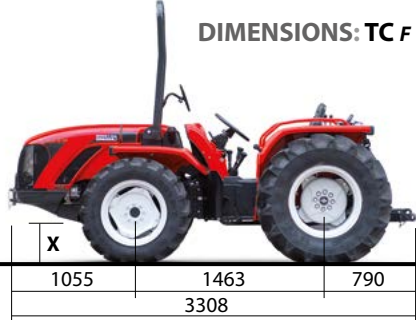

Wheels

Front	Rear	X	Y
8.25-16	280/85 R20	263	1325
300/80-15.3	360/70 R20	304	1465
280/70-18	360/70 R20	272	1435

