


Features

- Anti-ligature features
- Vandal resistant design
- 15 second concealed time flow cartridge.
- Machined identification button
- High flow bubbler
- High quality chrome finish for easy cleaning and hygiene maintenance

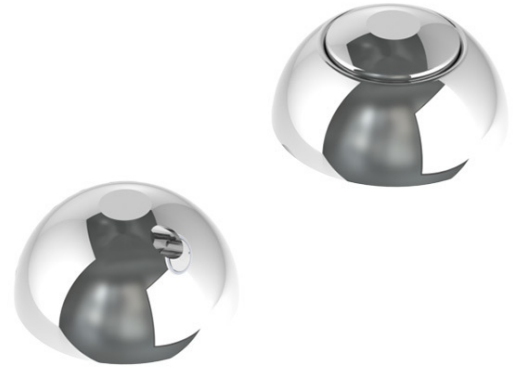

Technical Information

• WaterMark	AS 3718 Lic. WMKA0034
• WELS	6 Star Rating (3L/min)
• Nominal Flow Rate (LPM)	2.55
• Inlet	1/2" BSP - Male
• Outlet	Dome Outlet
• Headwork	Time Flow Cartridge
• Working Pressure Range (kPa)	100 Min - 500 Max
• Working Temperature Range (°C)	5 Min - 70 Max
• Finish	Chrome

