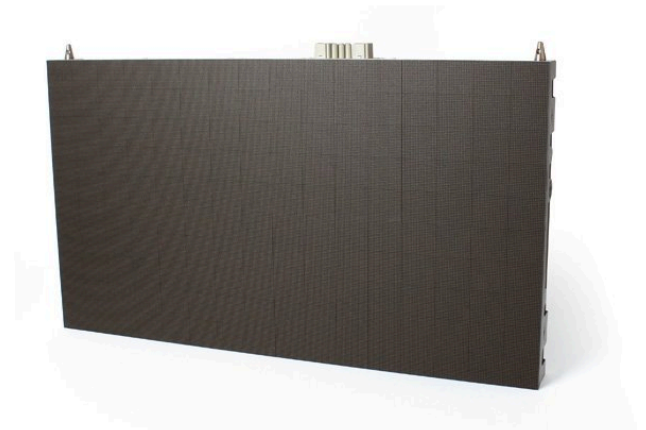
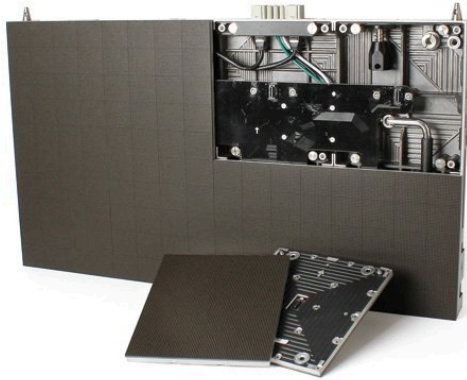


NEC LED-FA012i2

1.2 mm Indoor FinePitch LED Module

Datasheet**Nothing less than magnificent**

For premium large surface visualization, NEC's fine pitch LED FA series modules provide standard resolution, direct view LED screens for applications in meeting spaces and exclusive signage. With a depth of just 5 cm, plus complete internal cabling, the FA series presents a sleek profile for a bezel-free viewing experience. With excellent viewing angles, consistent vibrant colours and superb brightness; the FA series delivers content that gets noticed. Designed with high quality components and maintenance access from the front, the FA series provides a display solution with longevity and good return on investment. The prime solution for boardrooms, auditoria, luxury retail environments and control rooms.

Benefits

Ultimate Versatility - small 16:9 modules allowing excellent flexibility within the available space.

Secure performance for demanding applications - with high-end components and redundant module design with additional power supply and data cards to ensure ongoing operations with a minimal loss of brightness levels.

Large scale for perfectly detailed imagery - completely bezel-less design with high contrast rates deliver an unhindered viewing experience.

Slim design - with a flush rear profile, LED modules can be integrated very close to the wall with minimal gap necessary due to very low heat emission.

Visual excellence - high contrast and high brightness is inherent in LED delivery, benefit from NEC's long lasting quality.

Product Information

Product Name	NEC LED-FA012i2
Product Group	1.2 mm Indoor FinePitch LED Module
Order Code	LED-FA012i2

Display

Pixel Configuration	3-in-1 SMD (Black)
LED type	SMD (1010)
Pixel Pitch [mm]	1.2
Brightness (max.) [cd/m ²]	800
Lifetime	100000 hrs (50% brightness)
Contrast Ratio (typ.)	5000:1
Viewing Angle [°]	170 horizontal / 170 vertical
Dimming Capability	256 levels
Colour Processing	16 bit
Colours [Trill.]	281
LED Driving Method	1/27 dynamic scan
Frame Rate [Hz]	50/60
Refresh Rate [Hz]	≤ 3840
Colour Temperature [K]	3000 - 9500

Screen Resolution

Resolution per m ²	623269
Number of Pixel per module [dot]	480 x 270
Number of Pixel per card [dot]	120 x 135

Electrical

Power Consumption typ. [W]	315 per m ² (normal use)
Power Consumption max. [W]	600 per m ²

Environmental Conditions

Operating Temperature [°C]	-20 to 40
Operating Humidity [%]	10 to 80

Mechanical

Dimensions (W x H x D) [mm] per module	608 x 342 x 49
Weight [kg]	8.8

Additional Features

Special Characteristics	Cableless Connector for Data and Power; Flush Surface SMD Design; Humidity-proof SMD Design; Redundant Data Receiving Cards; Redundant Power Supplies
Manufacturer	NEC
Serviceability	Front Service
IP Level	IP20
Certifications	CE; ETL; FCC Class A; RoHS; RCM
Warranty	3 years warranty

This document is © 2024 Sharp Corporation of Australia .

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 04.03.2024