

SHARP

Be Original.

BP-70M75

Digital Multifunctional System

The smart way to get more done



smart business partner

High Productivity

The BP-70M75 delivers a fast output of 75 ppm^{*1}. And if toner runs out during a print job, the MFD continues printing your documents while you change the toner cartridge. Your productivity won't miss a beat.

All the Needed Finishing Options

Finishing options are available for all your common needs—there's an inserter, a folding unit, two types of saddle stitch finisher, and a trimming module. These let you easily create professional-looking direct mail, handouts, booklets, brochures, and more.

Unified Cloud Connection

You only need to sign in once to connect to multiple cloud services, such as Microsoft Teams, from the MFD. Applications can also be easily downloaded from the cloud. Updates are clearly displayed, so you're always using the latest version of services.

Solid Security

The BP-70M75 has multiple levels of security to keep the device—and your precious data—secure. When booting up, the MFD checks for any anomalies in the BIOS firmware. If it finds a problem, it aborts the startup. If there are other firmware-related issues, the MFD will attempt recovery to protect the system. You can also install optional software to prevent attacks on devices connected to the MFD.

Link Mobile Devices

Mobile devices installed with the Sharpsdesk Mobile application can connect directly to the MFD for printing or downloading scanned data. The MFD is also equipped with AirPrint and the Sharp Print Service Plugin. It's a smoother way to get the job done.

10.1-Inch Full-Flat Touchscreen

With a variety of functions accessible via simple, intuitive icons, MFD operation is smooth and easy.

On-Screen System Information

The control panel shows the state of your MFD, displaying current operation and notifications for things like paper, toner, and maintenance.

High-Performance DSPF

The DSPF (duplex single pass feeder) scans both pages of two-sided documents in one pass—in batches of up to 300 sheets. With scanning speeds of up to 280 opm^{*2} (two-sided), the MFD is quick to finish even large jobs. A dedicated business card feeder on the DSPF scans batches of up to 150 cards.

Smart Scanning

Simply tap the Auto Set button and the MFD will automatically determine the optimal resolution, gradation, and compression rate for your scan jobs. It also automatically reorients pages right side up and corrects any skewed sheets.

Eco-Friendly Design

Despite its many functions, this MFD achieves superb energy efficiency. For example, the use of low-temperature-fusing toner results in vastly reduced energy consumption for the MFD.

Remote Firmware Updates

The BP-70M75's firmware can be remotely updated—without the need for service operation—via a firmware update service. That way you're always using the latest system for your MFD.

^{*1}: A4, long-edge feeding. ^{*2}: Originals per minute; when feeding A4 sheets.

PROFESSIONAL-QUALITY IN-LINE FINISHING OPTIONS

A range of finishing options work to automate time-consuming finishing tasks. Options are available to suit a variety of workplaces and applications.

		MX-FN34 Finisher	MX-FN35 Saddle Stitch Finisher	MX-FN21 Finisher	MX-FN21 Finisher	MX-FN22 Saddle Stitch Finisher	MX-FN22 Saddle Stitch Finisher
					+		+
					MX-FD10 Folding Unit		MX-FD10 Folding Unit
Features	Stapling	✓	✓	✓	✓	✓	✓
	Stapleless stapling	✓	✓				
	Manual stapling	✓	✓				
	Punching ^{*1}	✓	✓	✓	✓	✓	✓
	Saddle folding		✓			✓	✓
	Saddle stitching		✓			✓	✓
	Half-folding				✓		✓
	Z-folding				✓		✓
	C-folding				✓		✓
	Accordion folding				✓		✓
	Double folding				✓		✓
	Trimming ^{*2}					✓	✓
Paper capacity ^{*3}	Finisher trays ^{*4}	3,250 sheets	3,250 sheets	4,250 sheets	4,250 sheets	4,250 sheets	4,250 sheets

^{*1}: Requires optional punch module. ^{*2}: Requires optional trimming module. ^{*3}: A4, 80 g/m². ^{*4}: Max. paper capacity of the finisher including the top tray.

Stapling

Rear corner Front corner 2-point side

Punching

2-hole punching 3-hole punching 4-hole punching 4-hole wide punching

Stapleless Stapling

Saddle Folding/Stitching

Saddle fold Saddle stitch

Trimming


Folding

Half-fold Z-fold C-fold Accordion fold Double fold

Insertion

Cover Inner page

SYSTEM CONFIGURATION

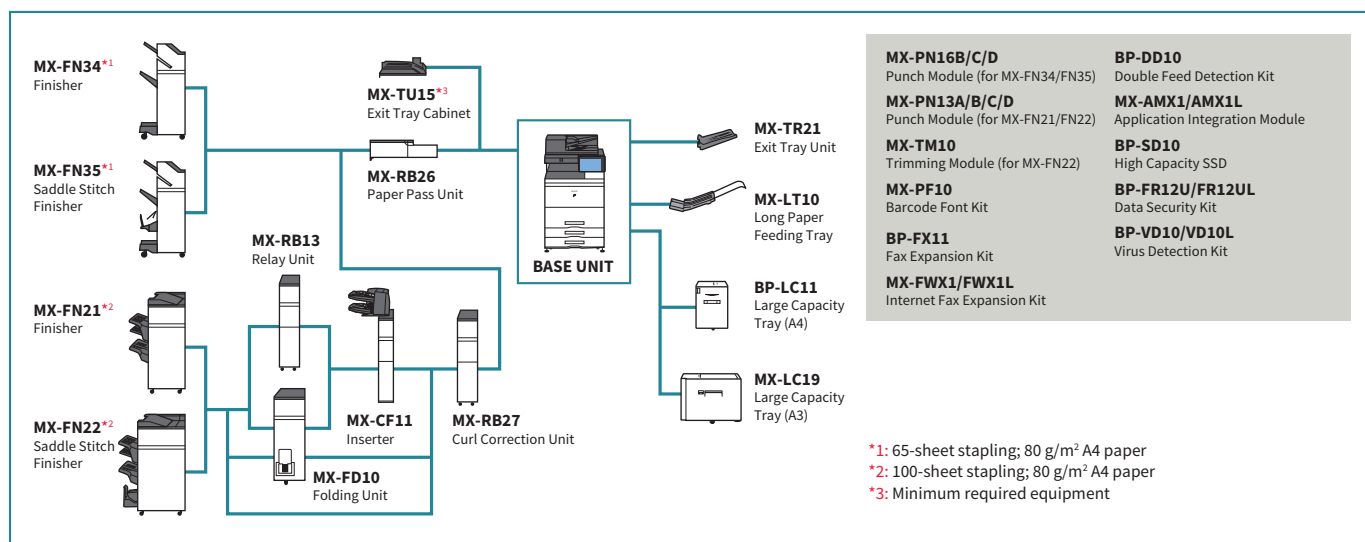

SPECIFICATIONS FOR OPTIONAL EQUIPMENT

MX-TR21 Exit Tray Unit

Paper size	A3W to A6 ^{*1}
Paper weight	55 to 256 g/m ²
Paper capacity	100 sheets

MX-FN34 Finisher

Paper size	Non offset Offset/staple Stapleless staple	A3W to A5 ^{*2} A3 to B5 ^{*3} A3, A4 ^{*3}
Paper weight	Non offset/offset/staple Stapleless staple	55 to 300 g/m ² 55 to 105 g/m ²
Paper capacity	Finisher tray (Non offset) (Offset) (Staple) (Stapleless staple) Top tray	3,000 sheets (A4 ^{*3} , B5 ^{*3}) 1,500 sheets (A3W, A3, B4, A4 ^{*2} , B5 ^{*2} , A5 ^{*2}) 3,000 sheets (A4 ^{*3} , B5 ^{*3}) 1,500 sheets (A3, B4, A4 ^{*2}) 200 sets or 3,000 sheets (A4 ^{*3} , B5 ^{*3}) 100 sets or 1,500 sheets (A3, B4, A4 ^{*2}) 200 sets (A4 ^{*3}), 100 sets (A3) 250 sheets (A4 ^{*3} , B5 ^{*3} , A5 ^{*2}) 125 sheets (A3W, A3, B4, A4 ^{*2} , B5 ^{*2}) 65 sheets (A4 ^{*3} , B5 ^{*3}), 30 sheets (A3, B4, A4 ^{*2})
Stapling capacity ^{*4}	Staple Stapleless staple Manual staple	5 sheets ^{*5} (A3, A4 ^{*3}) Total paper thickness 9 mm or less (65 sheets)
Staple position	Staple mode Stapleless staple mode Manual staple mode	3 locations (front, rear, or 2-point stapling) 1 location (rear) 1 location
Power requirements		Supplied by main unit
Dimensions	With tray stored With tray extended	533 x 653 x 1,103 mm (W x D x H) 635 x 653 x 1,167 mm (W x D x H)
Weight (approx.)		33 kg

MX-FN35 Saddle Stitch Finisher

Paper size	Non offset Offset/staple Stapleless staple	A3W to A5 ^{*2} A3 to B5 ^{*3} A3, A4 ^{*3}
Paper weight	Non offset/offset/staple Stapleless staple Saddle stitch Folding	55 to 300 g/m ² 55 to 105 g/m ² 60 to 256 g/m ² 55 to 256 g/m ²
Paper capacity	Finisher tray (Non offset) (Offset) (Staple) (Stapleless staple) Top tray Saddle stitch tray	3,000 sheets (A4 ^{*3} , B5 ^{*3}) 1,500 sheets (A3W, A3, B4, A4 ^{*2} , B5 ^{*2} , A5 ^{*2}) 3,000 sheets (A4 ^{*3} , B5 ^{*3}) 1,500 sheets (A3, B4, A4 ^{*2}) 200 sets or 3,000 sheets (A4 ^{*3} , B5 ^{*3}) 100 sets or 1,500 sheets (A3, B4, A4 ^{*2}) 200 sets (A4 ^{*3}), 100 sets (A3) 250 sheets (A4 ^{*3} , B5 ^{*3} , A5 ^{*2}) 125 sheets (A3W, A3, B4, A4 ^{*2} , B5 ^{*2}) 10 sets of 11–20 sheets, 15 sets of 6–10 sheets, 25 sets of 1–5 sheets
Stapling capacity ^{*4}	Staple Stapleless staple Manual staple	65 sheets (A4 ^{*3} , B5 ^{*3}), 30 sheets (A3, B4, A4 ^{*2}) 5 sheets ^{*5} (A3, A4 ^{*3}) Total paper thickness 9 mm or less (65 sheets)
Staple position	Staple mode Stapleless staple mode Manual staple mode	3 locations (front, rear, or 2-point stapling) 1 location (rear) 1 location
Power requirements		Supplied by main unit
Dimensions	With tray stored With tray extended	533 x 653 x 1,103 mm (W x D x H) 635 x 653 x 1,167 mm (W x D x H)
Weight (approx.)		57 kg

MX-FN21 Finisher

Paper size	Non offset Offset/staple	A3W to A5 ^{*2} A3 to B5 ^{*3}
Paper weight	Non offset/offset Staple	55 to 300 g/m ² 60 to 300 g/m ²
Paper capacity	Upper tray (Non offset) (Staple) Lower tray (Non offset) (Offset) (Staple) Middle tray (Non offset)	1,500 sheets (A4 ^{*3} , B5 ^{*3} , A5 ^{*2}) 750 sheets (A3W, A3, B4, A4 ^{*2} , B5 ^{*2}) 100 sets or 1,500 sheets (A4 ^{*3} , B5 ^{*3}) 50 sets or 750 sheets (A3, B4, A4 ^{*2}) 2,500 sheets (A4 ^{*3} , B5 ^{*3}), 1,500 sheets (A5 ^{*2}) 750 sheets (A3W, A3, B4, A4 ^{*2} , B5 ^{*2}) 1,500 sheets (A4 ^{*3} , B5 ^{*3}) 750 sheets (A3, B4, A4 ^{*2}) 100 sets (A4 ^{*3} , B5 ^{*3}), 50 sets (A3, B4, A4 ^{*2}) 250 sheets (A4 ^{*3} , B5 ^{*3} , A5 ^{*2}) 125 sheets (A3W, A3, B4, A4 ^{*2} , B5 ^{*2})
Stapling capacity ^{*4}		100 sheets (A4 ^{*3} , B5 ^{*3}), 50 sheets (A3, B4, A4 ^{*2})
Staple position		3 locations (front, rear, or 2-point stapling)
Power consumption (max.)		200 W, 350 W with MX-FD10
Power requirements		AC 230 V, 10 A
Dimensions	With tray stored With tray extended	654 x 765 x 1,040 mm (W x D x H) 782 x 765 x 1,040 mm (W x D x H)
Weight (approx.)		61 kg

Note: All specifications relating to paper capacity refer to 80 g/m² paper.

^{*1}: Short-edge feeding for A5 and A6 paper. ^{*2}: Short-edge feeding. ^{*3}: Long-edge feeding. ^{*4}: Using 80 g/m² paper, can include back and front covers (total of 2 sheets) of heaviest paper that can be stapled. ^{*5}: Guaranteed stapleable weight is up to 64 g/m² (4 sheets up to 81.4 g/m² and 3 sheets up to 105 g/m²). ^{*6}: Can include a single cover sheet of 300 g/m² or less. ^{*7}: Z-fold and half-fold pages are ejected from the finisher (MX-FN21/FN22).

MX-FN22 Saddle Stitch Finisher

Paper size	Non offset Offset/staple	A3W to A5 ^{*2} A3 to B5 ^{*3}
Paper weight	Non offset/offset Staple/saddle stitch/folding	55 to 300 g/m ² 60 to 300 g/m ²
Paper capacity	Upper tray (Non offset) (Staple) Lower tray (Non offset) (Offset) (Staple) Middle tray (Non offset) Saddle stitch tray	1,500 sheets (A4 ^{*3} , B5 ^{*3} , A5 ^{*2}) 750 sheets (A3W, A3, B4, A4 ^{*2} , B5 ^{*2}) 100 sets or 1,500 sheets (A4 ^{*3} , B5 ^{*3}) 50 sets or 750 sheets (A3, B4, A4 ^{*2}) 2,500 sheets (A4 ^{*3} , B5 ^{*3}), 1,500 sheets (A5 ^{*2}) 750 sheets (A3W, A3, B4, A4 ^{*2} , B5 ^{*2}) 1,500 sheets (A4 ^{*3} , B5 ^{*3}) 750 sheets (A3, B4, A4 ^{*2}) 100 sets (A4 ^{*3} , B5 ^{*3}), 50 sets (A3, B4, A4 ^{*2}) 250 sheets (A4 ^{*3} , B5 ^{*3} , A5 ^{*2}) 125 sheets (A3W, A3, B4, A4 ^{*2} , B5 ^{*2}) 5 sets of 16–20 sheets, 10 sets of 11–15 sheets, 15 sets of 6–10 sheets, 25 sets of 1–5 sheets
Stapling capacity ^{*4}		100 sheets (A4 ^{*3} , B5 ^{*3}), 50 sheets (A3, B4, A4 ^{*2})
Staple position		3 locations (front, rear, or 2-point stapling)
Power consumption (max.)		200 W, 350 W with MX-FD10
Power requirements		AC 230 V, 10 A
Dimensions	With tray stored With tray extended	767 x 765 x 1,040 mm (W x D x H) 896 x 765 x 1,040 mm (W x D x H)
Weight (approx.)		108 kg

MX-TM10 Trimming Module (for MX-FN22)

Paper size	A3W to A4 ^{*2}
Paper weight	60 to 300 g/m ²
Acceptable number of sheets ^{*7}	2 to 20 sheets (60 to 81.4 g/m ²) 2 to 10 sheets (81.4 to 105 g/m ²) 2 to 3 sheets (105 to 220 g/m ²)
Trim width	2 to 20 mm in 0.1 mm increments
Power requirements	Supplied by MX-FN22
Weight (approx.)	32 kg

Punch Modules

Model name	For MX-FN21/FN22	MX-PN13A	MX-PN13B	MX-PN13C	MX-PN13D
	For MX-FN34/FN35	–	MX-PN16B	MX-PN16C	MX-PN16D
Number of holes		2	3	4/2	4 (wide)
Paper weight	MX-PN13A/B/C/D MX-PN16B/C/D	55 to 256 g/m ² 55 to 300 g/m ²			
Power requirements		Supplied by MX-FN21/FN22/FN34/FN35			
Weight (approx.)	MX-PN13A/B/C/D MX-PN16B/C/D	3.7 kg 2.5 kg			

MX-FD10 Folding Unit

Folding mode		Z-fold, C-fold, Accordion-fold, Double-fold, Half-fold
Paper size	Z-fold	A3 to A4 ^{*2}
	Half-/C-/Accordion-/Double-fold	A4 ^{*2}
Paper weight		55 to 105 g/m²
Paper capacity	Z-fold ^{*7}	30 sheets (A3, B4), 10 sheets (A4 ^{*2})
	Half-fold ^{*7}	10 sheets (A4 ^{*2})
	C-/Accordion-fold	40 sheets (A4 ^{*2})
	Double-fold	25 sheets (A4 ^{*2})
Power requirements		Supplied by MX-FN21/FN22
Dimensions		336 x 793 x 1,050 mm (W x D x H)
Weight (approx.)		66 kg

MX-RB27 Curl Correction Unit

Paper size	A3W to A5 ^{*2}
Paper weight	55 to 300 g/m ²
Power requirements	Supplied by main unit
Dimensions	214 x 762 x 986 mm (W x D x H)
Weight (approx.)	19 kg

MX-CF11 Inserter

Paper size		A3W to A5 ^{*2}
Paper weight		60 to 220 g/m ²
Paper capacity	Upper/lower tray	200 sheets/each
Power requirements		Supplied by main unit
Dimensions	With tray stored	540 x 760 x 1,276 mm (W x D x H)
	With tray extended	690 x 760 x 1,276 mm (W x D x H)
Weight (approx.)		45 kg

BP-LC11 Large Capacity Tray (A4)

Paper size	A4 ^{*3}
Paper weight	60 to 220 g/m ²
Paper capacity	3,500 sheets
Power requirements	Supplied by main unit
Dimensions	371 x 575 x 525 mm (W x D x H)
Weight (approx.)	28 kg


MX-LC19 Large Capacity Tray (A3)

Paper size	A3W to B5 ^{*3}
Paper weight	60 to 220 g/m ²
Paper capacity	3,000 sheets
Power requirements	Supplied by main unit
Dimensions	694 x 589 x 519 mm (W x D x H)
Weight (approx.)	50 kg

MX-LT10 Long Paper Feeding Tray

Paper size	Width Length	90 to 305 mm 458 to 1,300 mm
Paper capacity		1 sheet
Dimensions	With tray stored With tray extended	338 x 195 x 107 mm (W x D x H) 581 x 195 x 130 mm (W x D x H)
Weight (approx.)		0.8 kg

SPECIFICATIONS

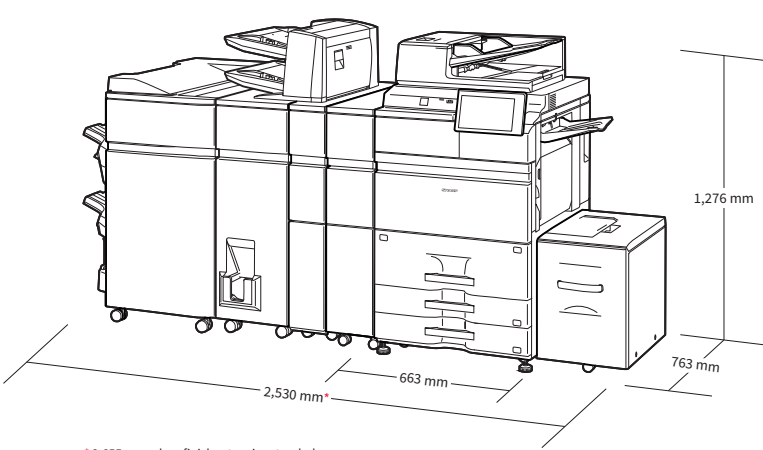General		Document Filing	
Type	Console	Document filing capacity ^{*14}	Main and custom folders: 20,000 pages or 3,000 files
Engine speed	A4 ^{*1} : Max. 75 ppm A3: Max. 37 ppm A3W: Max. 34 ppm	Stored jobs ^{*15}	Quick file folder: 10,000 pages or 1,000 files Copy, print, scan, fax
Control panel display	10.1-inch colour LCD touchscreen	Storage folders	Quick file folder, main folder, custom folder (max. 1,000 folders)
Paper size	Max. A3W, min. A6 ^{*2}	Printer	
Paper capacity (80 g/m²)	Standard: 3,200 sheets (1,250-sheet tray, 850-sheet tray, 500-sheet tray x 2, and 100-sheet bypass tray) Maximum: 6,700 sheets (3,200 sheets & optional 3,500-sheet tray)		
Paper weight	Tray 1&2: 60 g/m² to 105 g/m² Tray 3&4: 60 g/m² to 220 g/m² Bypass tray: 55 g/m² to 300 g/m²		
Warm-up time ^{*3}	25 sec. ^{*4}	Resolution	1,200 x 1,200 dpi, 600 x 600 dpi, 9,600 (equivalent) x 600 dpi
Memory	Standard: 5 GB (copy/print shared) 256 GB SSD ^{*5} Option: 512 GB ^{*5*6}	Interface	USB 2.0 (host, high-speed), USB 3.0 (host, super speed), 10Base-T/100Base-TX/1000Base-T, wireless LAN (IEEE 802.11 a/b/g/n/ac)
Power requirements	Rated local AC voltage ±10%, 50/60 Hz	Supported OS	Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019, Windows Server 2022, Windows 8.1, Windows 10, Windows 11, Mac OS 10.10 to 10.15, 11, 12, 13, 14, 15
Power consumption	Max. 2.07 kW (220 V to 240 V)	Network protocols	TCP/IP
Dimensions (W x D x H) ^{*7}	663 x 763 x 1,240 mm	Printing protocols	LPR, Raw TCP (port 9100), POP3 (email printing), HTTP, FTP for downloading print files, IPP, IPP Everywhere, SMB, WSD
Weight (approx.)	163 kg	PDL	PCL 6 emulation, Adobe PostScript 3
Copier		Available fonts	80 fonts for PCL, 139 fonts for Adobe PostScript 3
		Facsimile (requires optional BP-FX11)	
Original paper size	Max. A3	Compression method	MH/MR/MMR/JBIG
First copy time ^{*8}	3.5 sec.	Communication protocol	Super G3/G3
Continuous copy	Max. 9,999 copies	Transmission time	Less than 3 seconds ^{*16}
Resolution	Scan: 600 x 600 dpi, 600 x 400 dpi, 600 x 300 dpi ^{*9} Print: 1,200 x 1,200 dpi, 600 x 600 dpi, 9,600 (equivalent) x 600 dpi (depending on copy mode)	Modem speed	33,600 bps to 2,400 bps with automatic fallback
Gradation	Equivalent to 256 levels	Transmission resolution	From Standard (203.2 x 97.8 dpi) to Ultra Fine (406.4 x 391 dpi)
Zoom range	25% to 400% (25% to 200% using DSPF) in 1% increments	Recording size	A3 to A5
Preset copy ratios	Metric: 10 ratios (5R/5E), inch: 8 ratios (4R/4E)	Memory	4 GB (built-in)
Scanner		Greyscale levels	Equivalent to 256 levels
		<ul style="list-style-type: none"> • Design and specifications are subject to change without prior notice. • Microsoft Teams, Windows, and Windows Server are trademarks of the Microsoft group of companies. AirPrint and Mac are trademarks of Apple Inc., registered in the US and other countries. PCL is a registered trademark of Hewlett-Packard Company. Adobe and PostScript are either registered trademarks or trademarks of Adobe in the US and/or other countries. All other brand names and product names may be trademarks or registered trademarks of their respective owners. 	
Scan method	Push scan (via control panel) Pull scan (TWAIN-compliant application)		
Scan speed ^{*10} (colour & B/W)	One-sided: Max. 140 originals/min. Two-sided: Max. 280 originals/min.		
Resolution	Push scan: 100, 150, 200, 300, 400, 600 dpi Pull scan: 75, 100, 150, 200, 300, 400, 600 dpi 50 dpi to 9,600 dpi via user setting ^{*11}		
File formats	TIFF, PDF, PDF/A-1a, PDF/A-1b, encrypted PDF, XPS, compact PDF ^{*12} , JPEG ^{*12} , searchable PDF, OOXML (pptx, xlsx, docx), text (TXT [UTF-8]), rich text (RTF)		
Scan destinations	Email/desktop ^{*13} /FTP server/network folder (SMB)/USB drive/local drive	<p>^{*1}: Long-edge feeding.</p> <p>^{*2}: Only short-edge feeding can be used with A6 paper. A6-size paper output requires optional MX-TR21.</p> <p>^{*3}: In a standard measurement environment. May vary depending on operating conditions and environment.</p> <p>^{*4}: When starting the MFD via the power button. 38 seconds when starting via the main power switch.</p> <p>^{*5}: Storage capacity depends on procurement and sourcing status.</p> <p>^{*6}: Replacing the standard-equipped SSD with the optional BP-SD10 increases storage capacity to 512 GB.</p> <p>^{*7}: Including protuberances.</p> <p>^{*8}: Long-edge feeding of A4 sheets from 1st paper tray, using document glass, MFD in fully ready condition. May vary depending on operating conditions and environment.</p> <p>^{*9}: Not available when using document glass.</p> <p>^{*10}: Based on Sharp's A4 standard chart, using document feeder, long-edge feeding, and factory default settings. Scan speed will vary depending on the type of document and the scan settings.</p> <p>^{*11}: Resolution will vary depending on the size of the scanned area.</p> <p>^{*12}: Colour/greyscale only.</p> <p>^{*13}: Requires Network Scanner Tool Lite.</p> <p>^{*14}: Storage capacity will vary depending on the type of document and the scan settings.</p> <p>^{*15}: Some features require optional equipment.</p> <p>^{*16}: Based on Sharp's standard chart with approx. 700 characters (A4 long-edge feeding) at standard resolution in Super G3 mode, 33,600 bps, JBIG compression.</p>	