

TOILETS

Pan - Wall Faced, Type 3



The Wall Faced, Type 3 Toilet Pan from Stoddart has the most water efficient dual flush rating (certified by WELS for 4.5L full flush and 3L half flush).

Stoddart Toilet Pans have been tested to support over 1000kg loads and withstand years of harsh treatment in Prisons and public amenities.

This unit reduces maintenance costs, water usage costs and is the right choice for use in all high security prisons, detention centres, police stations, hospitals, schools and public amenities. The toilet seat is hydraulically formed to create a safe, strong, comfortable contoured and self draining profile.

The standard option has secured side access covers. A rear access option is available, this is ideal for high security prisons and detention centres.




Models:

SPPL.TP.WF.3.x.y.zzz.vvv

Code explanation:

SPPL = Standard Product Plumbing
 TP = Toilet pan
 WF3 = Wall faced type 3
 x = A - ambulant (H460mm, L650mm)
 = D - disabled (H460mm, L800mm)
 = S - standard (H400mm, L700mm or L650mm by request)
 y = S - heavy duty 2mm material
 zzz = BSA - both sides access
 = LSA - left side access
 = RSA - right side access (no side access panels)
 vvv = Variations
 = WA - addition of sound suppression material & provision of 5mm SS rivets for fastening access panels after installation
 For other variations contact Stoddart
 eg.: for specification and ordering
 SPPL.TP.WF.3.D.S.BSA

Flushing Device Options:



FD.CI.IW.PRF.CB



FD.CI.IW.PRF



FD.EFV.DF



FD.CI.IW.EDF

Toilet Seat Options:



CMPL.0675



CMPL.0814



CMPL.0915




CMPL.1005

Features and Benefits:

- Heavy duty (1000kg) load carrying capacity for bariatric applications.
- Plumbing and fixing points are concealed for security and vandal resistance.
- Access to plumbing is via side access panels (except for RA variation for cells with rear access).
- Toilet pan seat has an anti-contraband flushing rim for effective cell inspection.
- Seat has smooth hydraulically formed radius to both outer and inner edges for safety and comfort and has a self draining seat surface for improved hygiene.
- All external corners are rounded with a smooth radius for user safety.
- For domestic and school applications, these toilets can be ordered with vandal resistant thermoplastic toilet lids and seats with stainless steel hinges.
- These toilets can be flushed with either a flush valve or cistern (ordered separately)



Suitable for use where disabled access is required



Due to product research and development, the information contained herein is subject to change without notification

Data Sheet Revision Date 17/02/2016

Manufactured by:

Tom Stoddart Pty Ltd. ABN 16 009690251
 39 Forest Way, Karawatha 4117, Queensland Australia

Specifications:

- Construction:** Toilet bowl & Trap – 304 stainless steel.
Seat, Body and shroud – 2.0mm 304 stainless steel
Options; Super Heavy Duty: Seat – 3.0mm
316 grade outer Body & Seat.
- Flushing:** WELS approved 4.5L full flush/3L half flush.
Flushing Device Must be able to deliver 1.4 litres per second to the toilet pan (as per AS1172).
- Water Connection:** 60mm i.d. inlet Key-Seal supplied for 40mm PVC.
- Waste Connection:** P trap standard, 95mm ID stainless steel spigot with rubber coupling included to suit 100mm PVC or copper sewer pipe.
Optional P-S adaptors can be ordered separately.
- Unit Fixing:** The unit is designed to be fixed to the rear wall with 4 bolts. A Z-clip is supplied to secure the front of the base to the floor.

FOR SET-OUT SEE TABLE BELOW.
Models:
SPPL.TP.WF.3.x.y.zzz.vvv



Code explanation:

- SPPL = Standard Product Plumbing
TP = Toilet pan
WF3 = Wall faced type 3
x = A - ambulant (H460mm, L650mm)
= D - disabled (H460mm, L800mm)
= S - standard (H400mm, L700mm or L650mm by request)
y = S - heavy duty 2mm material
zzz = BSA - both sides access
= LSA - left side access
= RSA - right side access (no side access panels)
vvv = Variations
= WA - addition of sound suppression material & provision of 5mm SS rivets for fastening access panels after installation




For other variations contact Stoddart

eg.: for specification and ordering

SPPL.TP.WF.3.D.S.BSA

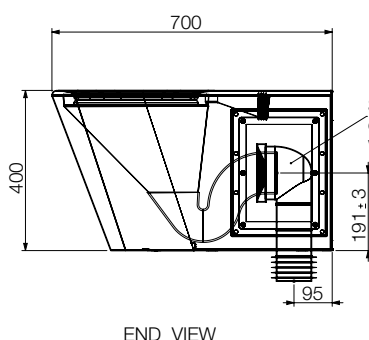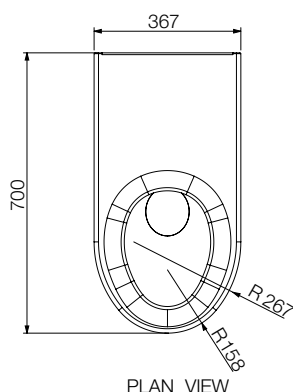

Removable rear angle, (in place for transport)

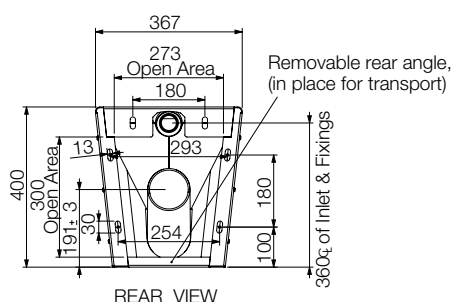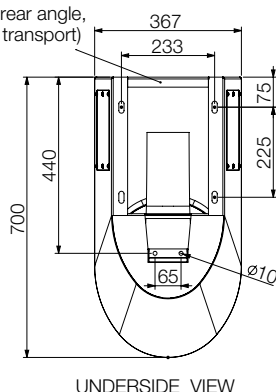
SPPL.TP.WF.3.S.S.BSA
Flushing Device Options:


FD.CI.IW.PRF.CB



FD.CI.IW.PRF



FD.EFV.DF



FD.CI.IW.EDF

Toilet Seat Options:


CMPL.0675



CMPL.0814



CMPL.0915



CMPL.1005

Description	Model & Type Variation	Length (mm)	Height (mm)	Inlet Height	Outlet Height	Waste Set-Out Std Bend	Waste Set-Out Q Bend
Disabled	SPPL.TP.WF - 3.D.S.BSA	800	460	420 ± 3	251 ± 3	195 ± 5	243 ± 5
Ambulant 650	SPPL.TP.WF - 3.A.S.BSA.650	650	460	420 ± 3	251 ± 3	176* See Plastec Universal Bend	
Standard 700	SPPL.TP.WF - 3.S.S.BSA.700	700	400	360 ± 3	191 ± 3	95 ± 5	143 ± 5

Manufactured by:

Tom Stoddart Pty Ltd. ABN 16 009690251
39 Forest Way, Karawatha 4117, Queensland Australia