

URINALS

Wall Hung Urinal Trough

Model: SPPL.UR.W.xxxx.yy

SPPL = Stoddart Plumbing Product
 UR = Urinal
 W = Wall Hung
 xxxx = Nominated Length
 yy = T = top entry water supply
 = R = rear entry water supply
 = L = left end waste
 = R = right end waste

eg.: for specification and ordering quote




Code: SPPL.UR.W.2400.TL

*L & U shaped configurations available.



Features and Benefits:

- Cost effective solution for site sheds and demountable buildings
- 50mm domed threaded waste can be ordered left or right
- 25mm internal radius corners
- Custom lengths available

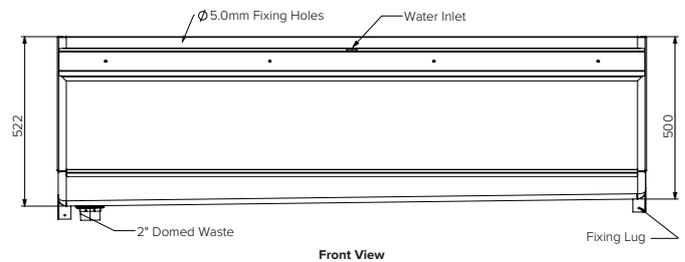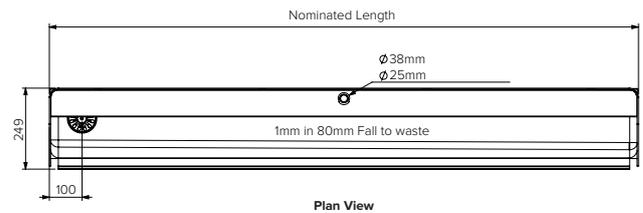

Specifications:

Construction: Fully welded 1.2mm thick 304 stainless steel construction, no.4 satin finish. Integrated mounting brackets.

Water Connection: Top entries in $\varnothing 25$ and $\varnothing 38$ dia. Rear entry in 25mm pressure pipe. Custom inlet positions available. Designed for WELS approved flush devices.

Waste Connection: 50mm threaded outlet Positioned 100mm from side wall.

Unit Fixing: Unit is designed to be positioned so as the front lip of the urinal is approximately 600mm from the finished floor level. Supplied with stainless steel mounting bracket at base for screw fixing to the wall. Unit should also be screwed to the wall through the top fixing edge.

Sold Separately

Flushing Device Options:



FD.CI.PC



FD.EUFS.MIC



Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 14/05/2021

www.stoddart.com.au

www.stoddart.co.nz