



PLUMBING PRODUCTS



SAFE ENSUITE | **2021**



- 01** Wall Mounted Wash Basin - Single Outlet
- 02** Wall Mounted Wash Basin - Dual Outlet
- 03** V2 Integrated Wash Basin
- 04** Low Profile Basin - Wall Hung
- 05** High Security WC Toilet Pan - Wall Hung
- 06** High Security WC Toilet Pan - Floor Mounted
- 07** Access WC Toilet Pan Spacer Box
- 08** Corner Soap Dish
- 09** Mirror
- 10** Mirror with Shelf
- 11** Programmable Tap Sensor
- 12** Programmable Bath Sensor
- 13** Programmable Urinal Sensor
- 14** Programmable Shower Sensor
- 15** Programmable Shower Sensor - Red Insert
- 16** Programmable Tap Sensor - Red Insert
- 17** Tactile Switch - Red Insert
- 18** Tactile Switch - Blue Insert
- 19** Programmable Tap Sensor - Blue Insert
- 20** Anti-Vandal Wave-on Sensor - Red Insert
- 21** Anti-Vandal Wave-on Sensor - Blue Insert

# CONTENTS




**Wash Basin - Wall Mounted**

**Model: SPPL.SE.WB.IS.xxx**

SPPL = Stoddart Plumbing Product  
 SE = Safe Ensuite  
 WB = Basin  
 IS = Integrated Splashback with Single Outlet  
 eg.: for specification and ordering quote  
 Code: SPPL.SE.WB.IS.106

**Features and Benefits:**

- Ideal for specialist hospitals, clinics, care homes and custodial applications
- Constructed from GRP moulded High Performance impact resistant material with polyester gel coat, formulated to resist chemicals and ultra violet rays
- Moulded impact resistant
- Moulded soap shelves
- Vandal and ligature resistant
- Programmable, wave-on or tactile activation sold separately

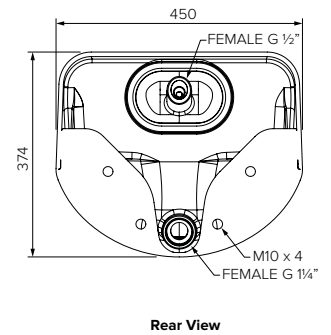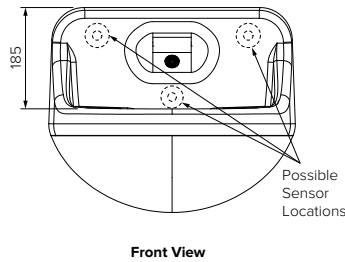

**Specifications:**

Construction: GRP High Performance Composite material  
 Gross Weight: 10kg  
 Tap Outlet: Integrated stainless steel water spout set at 5L /min  
 Waste Grid: 316 grade Stainless Steel anti-ligature  
 Cable Length: 3 metres (8/15m cable P.O.A available upon request)  
 Unit Fixing: Secure to wall with provided 4 x 10mm Stainless Steel all thread - to suit 100mm wall thickness only.

Model No.	Description	L x W x H (mm)
SPPL.SE.WB.IS.125	No sensor	450 x 300 x 374
SPPL.SE.WB.IS.106	Programmable centre sensor	450 x 300 x 374
SPPL.SE.WB.IS.119	Left hand Tactile button	450 x 300 x 374
SPPL.SE.WB.IS.120	Left hand Wave-on sensor	450 x 300 x 374
SPPL.SE.WB.IS.124	Left hand Programmable sensor	450 x 300 x 374
SPPL.SE.WB.IS.113	Right hand Tactile button	450 x 300 x 374
SPPL.SE.WB.IS.114	Right hand Wave-on sensor	450 x 300 x 374
SPPL.SE.WB.IS.118	Right hand Programmable sensor	450 x 300 x 374
SPPL.SE.WB.IS.107	Dual Tactile buttons	450 x 300 x 374
SPPL.SE.WB.IS.108	Dual Wave-on sensor	450 x 300 x 374
SPPL.SE.WB.IS.112	Dual Programmable sensor	450 x 300 x 374

Due to continuous product research and development, the information contained herein is subject to change without notice.  
 Revision: B - 20/05/2021


## Wash Basin - Wall Mounted

**Model: SPPL.SE.WB.ID.xxx**


SPPL = Stoddart Plumbing Product  
 SE = Safe Ensuite  
 WB = Basin  
 ID = Integrated Splashback with Dual Outlet  
 eg.: for specification and ordering quote  
 Code: SPPL.SE.WB.ID.105

**Features and Benefits:**


- Ideal for specialist hospitals, clinics, care homes and custodial applications
- Constructed from GRP moulded High Performance impact resistant material with polyester gel coat, formulated to resist chemicals and ultra violet rays
- Moulded impact resistant
- Moulded soap shelves
- Vandal and ligature resistant
- Programmable, wave-on or tactile activation sold separately

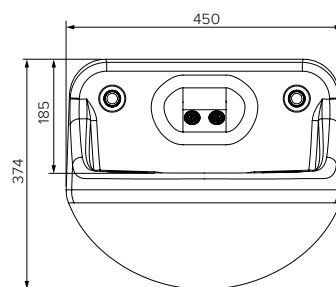

**Front View**

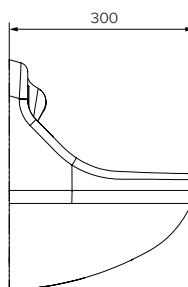

**End View**

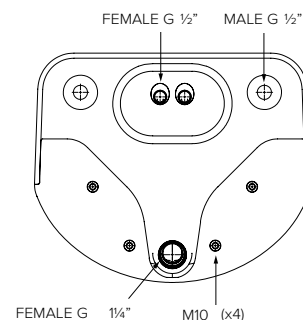

**Rear View**

**Specifications:**

Construction: GRP High Performance Composite material  
 Gross Weight: 10kg  
 Tap Outlet: Integrated stainless steel water spout set at 5L /min  
 Waste Outlet: Rear concealed waste outlet  
 Waste Grid: 316 grade Stainless Steel anti-ligature  
 Cable Length: 3 metres (8/15m cable P.O.A available upon request)  
 Unit Fixing: Secure to wall with provided 4 x 10mm Stainless Steel all thread - to suit 100mm wall thickness only.

Model No.	Description	L x W x H (mm)
SPPL.SE.WB.ID.100	Tactile Buttons	450 x 300 x 374
SPPL.SE.WB.ID.101	Wave-on Sensors	450 x 300 x 374
SPPL.SE.WB.ID.105	Programmable Sensors	450 x 300 x 374

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 20/05/2021


## V2 Integrated Wash Basin

**Model: SPPL.SE.WB.HD.xxx**


SPPL = Stoddart Plumbing Product  
 SE = Safe Ensuite  
 WB = Basin  
 HD = High Sided Integrated Splashback with Dual Outlet  
 eg.: for specification and ordering quote  
 Code: SPPL.SE.WB.HD.080

**Features and Benefits:**

- Ideal for specialist hospitals, clinics, care homes and custodial applications
- Constructed from GRP moulded High Performance impact resistant material with polyester gel coat, formulated to resist chemicals and ultra violet rays
- Basin and moulded soap shelves
- Moulded impact resistant
- Vandal and ligature resistant
- Wave-on and tactile activation sold separately

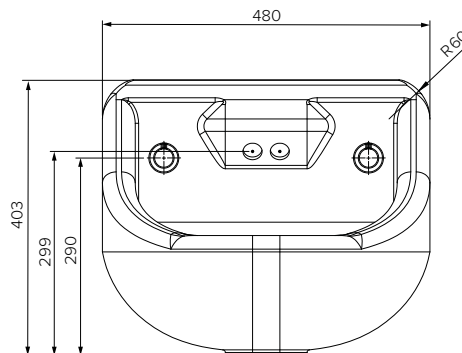

Front View

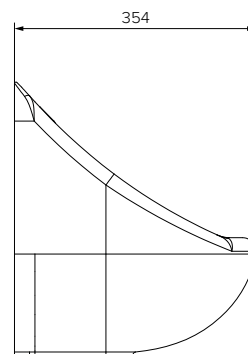

End View

**Specifications:**

Construction: GRP High Performance Composite material  
 Gross Weight: 13.6kg  
 Tap Outlet: Integrated stainless steel water spout set at 5L /min  
 Waste Outlet: Rear concealed waste outlet  
 Waste Grid: 316 grade Stainless Steel anti-ligature  
 Cable Length: 3 metres (8/15m cable P.O.A available upon request)  
 Unit Fixing: Secure to wall with provided 4 x 10mm Stainless Steel all thread - to suit 100mm wall thickness only.

Model No.	Description	L x W x H (mm)
SPPL.SE.WB.HD.080	Dual sensor, dual outlet	480 x 354 x 403

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: 20/05/2021

## Low Profile Basin - Wall Hung

**Model: SPPL.SE.WB.L.xxx**

SPPL = Stoddart Plumbing Product

SE = Safe Ensuite

WB = Wash Basin


L = Low Profile

eg.: for specification and ordering quote


Code: SPPL.SE.WB.L.081

**Features and Benefits:**


- Ideal for specialist hospitals, clinics, care homes and custodial applications
- Constructed from GRP moulded High Performance impact resistant material with polyester gel coat, formulated to resist chemicals and ultra violet rays
- Polyester gel coat formulated to resist chemicals and ultra violet rays
- Option of 0/1/2 tap holes available
- Vandal and ligature resistant
- Concealed rear waste outlet
- Fixing kit for walls up to 250mm thick provided

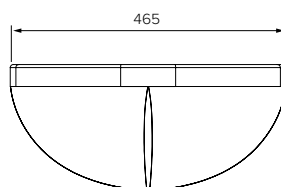

**Front View**



**End View**

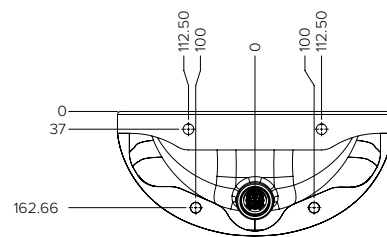

**Rear View**

**Specifications:**

- Construction: GRP High Performance Composite material
- Gross Weight: 7.95kg
- Waste Outlet: Rear concealed waste outlet
- Cable Length: 3 metres (8/15m cable P.O.A available upon request)
- Unit Fixing: Secure to wall with provided 4 x 10mm Stainless Steel all thread - to suit 100mm wall thickness. Optional fixing kit is available for fixing the basin on up to 250mm wall thicknesses.

Model No.	Description	L x W x H (mm)
SPPL.SE.WB.L.081	No Tap Holes	465 x 305 x 210
SPPL.SE.WB.L.082	Single Left Hand Tap Hole	465 x 305 x 210
SPPL.SE.WB.L.083	Single Right Hand Tap Hole	465 x 305 x 210
SPPL.SE.WB.L.084	Dual Tap Holes	465 x 305 x 210

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 20/05/2021

# High Security WC Toilet Pan - Wall Hung

**Model: SPPL.SE.TP.W.xxx**

SPPL = Stoddart Plumbing Product

SE = Safe Ensuite

TP = Toilet Pan


W = Wall Hung

eg.: for specification and ordering quote


Code: SPPL.SE.TP.W.017

**Features and Benefits:**

- Ideal for specialist hospitals, clinics, care homes and custodial applications
- Constructed from GRP moulded High Performance impact resistant material with polyester gel coat, formulated to resist chemicals and ultra violet rays
- Water efficient 4 litre flush
- Domestic aesthetics
- Vandal and ligature resistant
- Hygienic non-porous surface
- Concealed rear waste outlet
- Large trap to reduce blockages
- Warm to the touch surface, eliminates 'icy shock'
- Fixing kit for walls up to 150mm thick provided
- Available with Blue/Grey/Red polyester gel coated top for the visually impaired

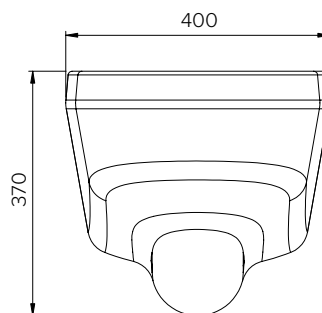

Front View

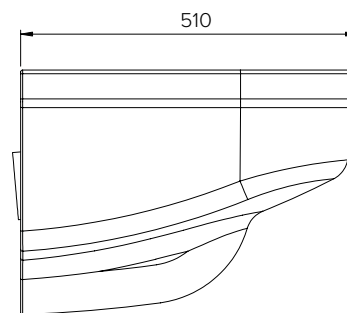

End View

**Specifications:**

Construction: GRP High Performance Composite material

Gross Weight: 14.7kg

Flush Inlet: ø55

Waste Outlet: ø100 Rear Concealed outlet

Unit Fixing: Secure through wall with provided 4 x 12mm Stainless Steel all thread

Optional Colours: Stoddart have 3 standard RAL colour options (see across), however, we can apply other RAL colours upon request (at an additional cost). Available on the standard back-to-wall and wall-hung pans

Model No.	Description	L x W x H (mm)
SPPL.SE.TP.W.017	White Top	510 x 400 x 370
SPPL.SE.TP.W.036	Blue Top	465 x 305 x 210
SPPL.SE.TP.W.073	Grey Top	465 x 305 x 210
SPPL.SE.TP.W.076	Red Top	465 x 305 x 210

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 20/05/2021

www.stoddart.com.au

www.stoddart.co.nz





## High Security WC Toilet Pan - Floor Mounted

**Model: SPPL.SE.TP.F.xxx**

SPPL = Stoddart Plumbing Product

SE = Safe Ensuite

TP = Toilet Pan

F = Floor Mounted


eg.: for specification and ordering quote

Code: SPPL.SE.TP.F.034




**Features and Benefits:**


- Ideal for specialist hospitals, clinics, care homes and custodial applications
- Constructed from GRP moulded High Performance impact resistant material with polyester gel coat, formulated to resist chemicals and ultra violet rays
- Available in 2 heights: Standard and Access\*
- Water efficient 4 litre flush
- Domestic aesthetics
- Vandal and ligature resistant
- Hygienic non-porous surface
- Concealed rear waste outlet
- Large trap to reduce blockages
- Warm to the touch surface, eliminates 'icy shock'
- Fixing kit for walls up to 150mm thick provided
- Available with Blue/Grey polyester gel coated top for the visually impaired

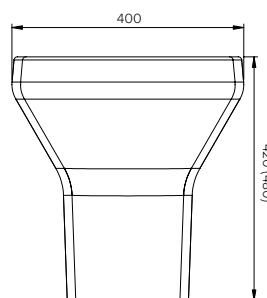

Front View

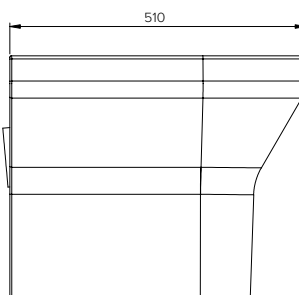

End View

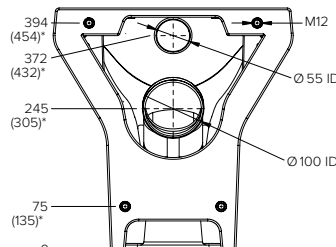

Rear View

**Specifications:**

Construction: GRP High Performance Composite material

Gross Weight: Standard = 16.8kg Access = 18.1kg

Flush Inlet: ø55

Waste Outlet: ø100 Rear Concealed outlet

Unit Fixing: Secure through wall with provided 4 x 12mm Stainless Steel all thread

Optional Colours: Stoddart have 3 standard RAL colour options (see across), however, we can apply other RAL colours upon request (at an additional cost). Available on the standard back-to-wall and wall-hung pans

Model No.	Description	L x W x H (mm)
SPPL.SE.TP.F.010	Standard height - White Top	510 x 400 x 420
SPPL.SE.TP.F.011	Access height - White Top	510 x 400 x 480
SPPL.SE.TP.F.034	Standard height - Blue Top	510 x 400 x 420
SPPL.SE.TP.F.035	Access height - Blue Top	510 x 400 x 480
SPPL.SE.TP.F.071	Standard height - Grey Top	510 x 400 x 420
SPPL.SE.TP.F.072	Access height - Grey Top	510 x 400 x 480
SPPL.SE.TP.F.074	Standard height - Red Top	510 x 400 x 420
SPPL.SE.TP.F.075	Access height - Red Top	510 x 400 x 480

\*Indicates dimensions for access model



Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 20/05/2021

[www.stoddart.com.au](http://www.stoddart.com.au)

[www.stoddart.co.nz](http://www.stoddart.co.nz)


## Access WC Toilet Pan Spacer Box

**Model: SPPL.SE.TP.ASB**


SPPL = Stoddart Plumbing Product  
 SE = Safe Ensuite  
 TP = Toilet Pan  
 ASB = Access Spacer Box  
 eg.: for specification and ordering quote  
 Code: SPPL.SE.TP.ASB

**Features and Benefits:**

- Designed specifically to allow access for wheelchairs on Stoddart Safe Ensuite toilet pans
- Constructed from GRP moulded high performance impact resistant material with polyester gel coat, formulated to resist chemicals and ultra violet rays
- Optional extra for use with SE.TP.F.xxx pans (Access high models only)

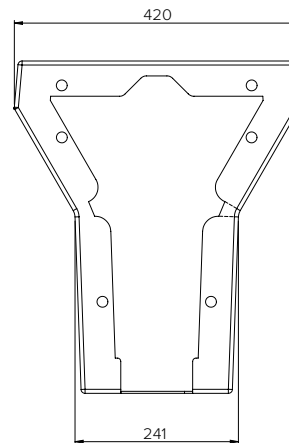

**FRONT VIEW**

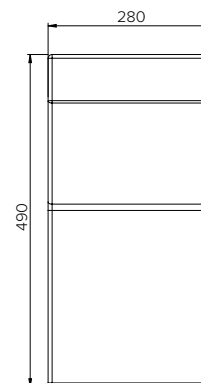

**END VIEW**

**Specifications:**

Construction: GRP High Performance Composite material  
 Unit Fixing: Unit has holes for fixing itself to the toilet pan and the wall. Fixing kit is supplied.

Model No.	Description	L x W x H (mm)
SPPL.SE.TP.ASB	Standard Model	420 x 280 x 490



Due to continuous product research and development, the information contained herein is subject to change without notice.  
 Revision: A -20/05/2021

## Corner Soap Dish

**Model: SPPL.SE.SD.xxx**

SPPL = Stoddart Plumbing Product

SE = Safe Ensuite


SD = Soap Dish

eg.: for specification and ordering quote


Code: SPPL.SE.SD.026

**Features and Benefits:**

- Ideal for specialist hospitals, clinics, care homes and custodial applications
- Constructed from GRP moulded High Performance impact resistant material with polyester gel coat, formulated to resist chemicals and ultra violet rays
- Ligature and impact resistant
- Moulded soap outlet for easy cleaning
- Easy and secure method of fixing

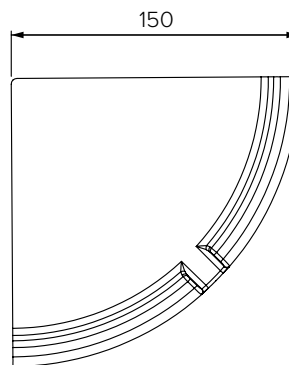

**Plan View**

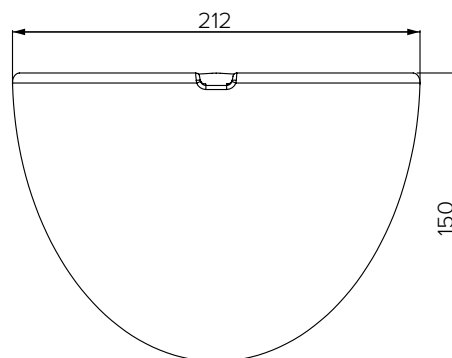

**Front View**

**Specifications:**

Construction: GRP High Performance Composite material

Gross Weight: 1.05kg

Unit Fixing: Secure to wall with included 2 x pre-drilled steel brackets and structural adhesive

Model No.	Description	L x W x H (mm)
SPPL.SE.SD.026	Corner Mounted	212 x 150 x 150

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 20/05/2021




Mirror

**Model: SPPL.SE.MI.025**

SPPL = Stoddart Plumbing Product  
 SE = Safe Ensuite  
 MI = Mirror  
 eg.: for specification and ordering quote  
 Code: SPPL.SE.MI.025

**Features and Benefits:**

- Ideal for specialist hospitals, clinics, care homes and custodial applications
- Constructed from GRP moulded High Performance impact resistant material with polyester gel coat, formulated to resist chemicals and ultra violet rays
- Virtually indestructible polycarbonate mirror insert
- Impact resistant frame and mirror
- Anti-ligature

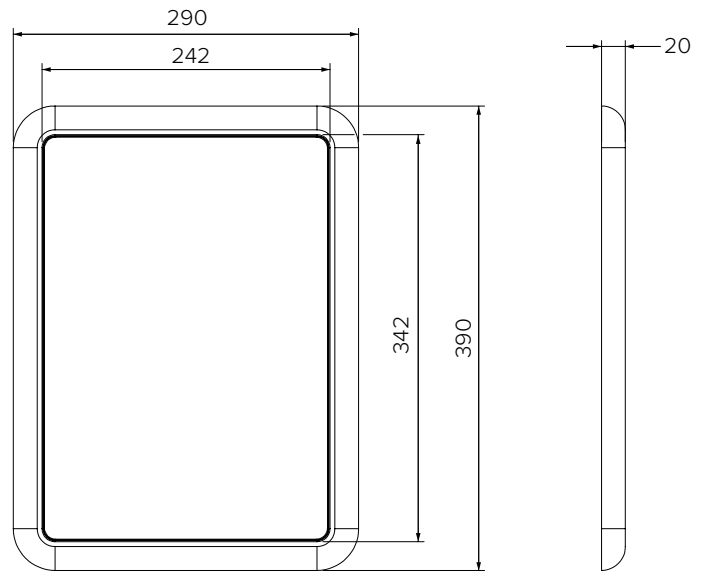

**Front View**

**End View**

**Specifications:**

Construction: GRP High Performance Composite material  
 Gross Weight: 2.20kg  
 Unit Fixing: Structural adhesive (contact Stoddart)

Model No.	L x H x W (mm)
SPPL.SE.MI.025	290 x 390 x 20

Due to continuous product research and development, the information contained herein is subject to change without notice.  
 Revision: A - 20/05/2021

## Mirror with Shelf

**Model: SPPL.SE.MI.037**

SPPL = Stoddart Plumbing Product

SE = Safe Ensuite


MI = Mirror

eg.: for specification and ordering quote

Code: SPPL.SE.MI.037

**Features and Benefits:**


- Ideal for specialist hospitals, clinics, care homes and custodial applications
- Constructed from GRP moulded High Performance impact resistant material with polyester gel coat, formulated to resist chemicals and ultra violet rays
- Virtually indestructible polycarbonate mirror insert
- Recessed shelf built in to the mirror frame
- Ligature and impact resistant
- 2 orientations to suit the needs of any application

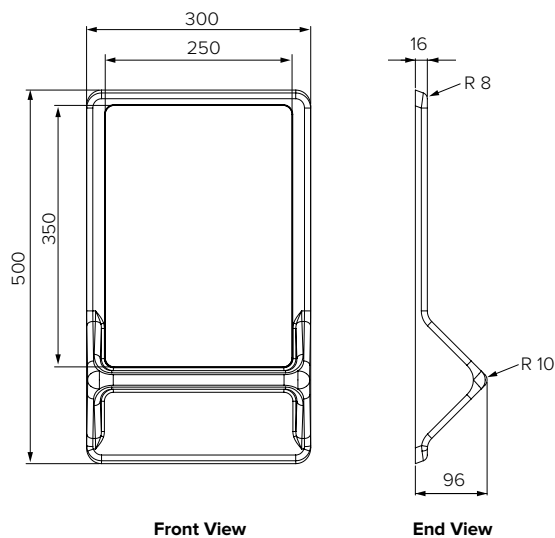

**Orientation**

No.1

No.2

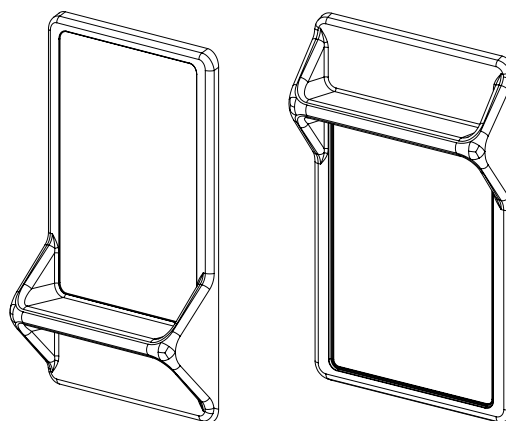

**Specifications:**

Construction: GRP High Performance Composite material

Gross Weight: 3.25kg

Unit Fixing: Structural adhesive (contact Stoddart)

Model No.	L x H x W (mm)
SPPL.SE.MI.037	300 x 500 x 96

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 20/05/2021

[www.stoddart.com.au](http://www.stoddart.com.au)

[www.stoddart.co.nz](http://www.stoddart.co.nz)


## Programmable Tap Sensor - Wall Mounted

**Model: SPPL.SE.PTS**


SPPL = Stoddart Plumbing Product  
 SE = Safe Ensuite  
 PTS = Programmable Tap Sensor  
 eg.: for specification and ordering quote  
 Code: SPPL.SE.PTS

**Features and Benefits:**

- 316 grade stainless steel construction with no.4 finish
- Active Infrared touch-free operation
- 2, 5, 10, 15, 20 & 30 second run time
- Sensor range of 1-10cm
- Wave-on and off operation
- Automatic purge with 30 second, 1, 2, 4 & 8-minutes
- Sits flush within wall



Front View

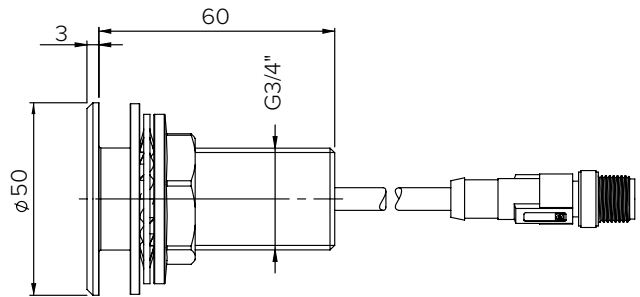

End View

**Specifications:**

Construction: 316 grade stainless steel construction, No.4 finish  
 Gross Weight: 0.2kg  
 Operation: Active Infrared touch-free, wave on & off operation  
 Unit Fixing: ø24mm drill hole required for wall mounting of unit. Sensor sits flush within wall.

Model No.	L x Dia (mm)
SPPL.SE.PTS	63 x Ø50

Due to continuous product research and development, the information contained herein is subject to change without notice.  
 Revision: A - 20/05/2021




## Programmable Bath Sensor - Wall Mounted

**Model: SPPL.SE.PBS**


SPPL = Stoddart Plumbing Product  
 SE = Safe Ensuite  
 PBS = Programmable Bath Sensor  
 eg.: for specification and ordering quote  
 Code: SPPL.SE.PBS

**Features and Benefits:**

- 316 grade stainless steel construction with no.4 finish
- Active Infrared touch-free operation
- 30 seconds, 1, 2, 3, 4, 8 & 10 minutes run time
- Sensor range of 1-3cm
- Wave-on and off operation
- Anti vandal time - Run +10 seconds
- Automatic purge - ON/OFF, 6, 12, 24, 36, 48 & 72 hours
- Purge run time of 30 seconds, 1, 2, 4 & 8 minutes
- Lockouts - OFF, 4, 6 & 8 ops
- Sits flush within wall



Front View

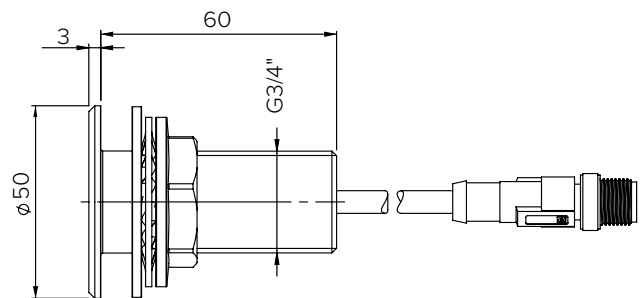

End View

**Specifications:**

Construction: 316 grade stainless steel construction, No.4 finish  
 Gross Weight: 0.2kg  
 Operation: Active Infrared touch-free, wave on & off operation  
 Unit Fixing: ø27mm drill hole required for wall mounting of unit. Sensor sits flush within wall.

Model No.	L x Dia (mm)
SPPL.SE.PBS	63 x Ø50

Due to continuous product research and development, the information contained herein is subject to change without notice.  
 Revision: A - 20/05/2021


Programmable Urinal Sensor - Wall Mounted

**Model: SPPL.SE.PURS**


SPPL = Stoddart Plumbing Product  
 SE = Safe Ensuite  
 PURS = Programmable Urinal Sensor  
 eg.: for specification and ordering quote  
 Code: SPPL.SE.PURS

**Features and Benefits:**

- 316 grade stainless steel construction with no.4 finish
- Active Infrared touch-free operation
- Pre-flush wait time - 1, 2, 3 & 4 seconds
- Pre-flush time - 1, 2, 3, 4, 5, 6, 7 & 8 seconds
- Main flush time - 1-15 seconds
- Sensor range of 1-10cm
- Anti vandal time - 1, 2, 4 & 8 minutes
- Automatic purge - OFF, 6, 12, 24, 36, 48 & 72 hours
- Purge run time - 30 seconds, 1, 2, 4 & 8 minutes
- Sits flush within wall



Front View

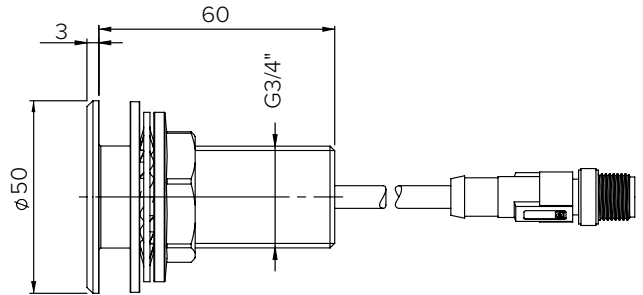

End View

**Specifications:**

Construction: 316 grade stainless steel construction, No.4 finish  
 Gross Weight: 0.2kg  
 Operation: Active Infrared touch-free, wave on & off operation  
 Unit Fixing: ø27mm drill hole required for wall mounting of unit. Sensor sits flush within wall.

Model No.	L x Dia (mm)
SPPL.SE.PURS	63 x Ø50

Due to continuous product research and development, the information contained herein is subject to change without notice.  
 Revision: A - 20/05/2021




## Programmable Shower Sensor - Wall Mounted

**Model: SPPL.SE.PSS**


SPPL = Stoddart Plumbing Product  
 SE = Safe Ensuite  
 PSS = Programmable Shower Sensor  
 eg.: for specification and ordering quote  
 Code: SPPL.SE.PSS

**Features and Benefits:**

- 316 grade stainless steel construction with no.4 finish
- Active Infrared touch-free operation
- Runtime of 30 seconds, 1, 2, 3, 4 & 5 minutes
- Sensor range of 1-3cm
- Wave-on and wave-off operation
- Anti vandal time - run + 10s
- Automatic purge - ON/OFF, 3, 6, 12, 24, 36, 48 hours
- Purge run time - 30 seconds, 1, 2, 4 & 8 minutes
- Lockouts - OFF, 4, 6, 8 & 10 ops
- Sits flush within wall



**Front View**

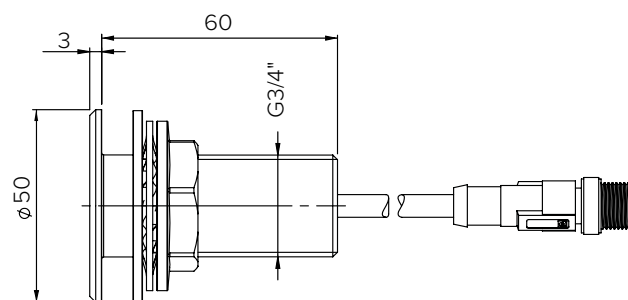

**End View**

**Specifications:**

Construction: 316 grade stainless steel construction, No.4 finish  
 Gross Weight: 0.2kg  
 Operation: Active Infrared touch-free, wave on & off operation  
 Unit Fixing:  $\varnothing$ 27mm drill hole required for wall mounting of unit. Sensor sits flush within wall.

Model No.	L x Dia (mm)
SPPL.SE.PSS	63 x $\varnothing$ 50

Due to continuous product research and development, the information contained herein is subject to change without notice.  
 Revision: A - 20/05/2021



Programmable Shower Sensor - Wall Mounted

**Model: SPPL.SE.PSS.RI**


SPPL = Stoddart Plumbing Product  
 SE = Safe Ensuite  
 PSS = Programmable Shower Sensor  
 RI = Red Insert  
 eg.: for specification and ordering quote  
 Code: SPPL.SE.PSS.RI

**Features and Benefits:**

- 316 grade stainless steel construction with no.4 finish
- Active Infrared touch-free operation
- 30 seconds, 1, 2, 3, 4 & 5 minutes
- Sensor range of 1-3cm
- Wave-on and off operation
- Automatic purge with ON/OFF, 3, 6, 12, 24, 36, 48 hours
- Purge run time of 30 seconds, 1, 2, 4 & 8 minutes
- Lock outs OFF, 4, 6, 8 & 10 ops
- Sits flush within wall

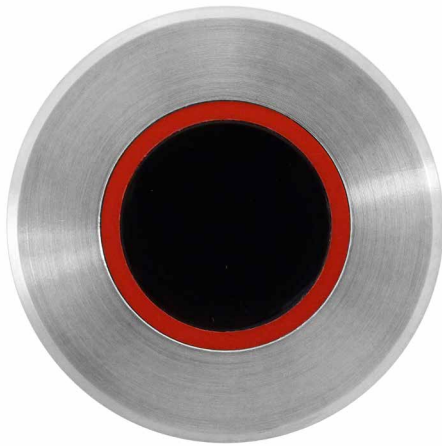

**Front View**

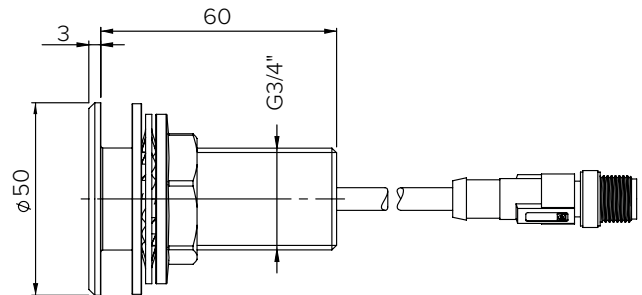

**End View**

**Specifications:**

Construction: 316 grade stainless steel construction, No.4 finish  
 Gross Weight: 0.2kg  
 Operation: Active Infrared touch-free, wave on & off operation  
 Unit Fixing: ø27mm drill hole required for wall mounting of unit. Sensor sits flush within wall.

Model No.	L x Dia (mm)
SPPL.SE.PSS.RI.WM	63 x Ø50

Due to continuous product research and development, the information contained herein is subject to change without notice.  
 Revision: A - 20/05/2021

## Programmable Tap Sensor - Wall Mounted

**Model: SPPL.SE.PTS.RI**

SPPL = Stoddart Plumbing Product

SE = Safe Ensuite

PSS = Programmable Tap Sensor



RI = Red Insert

eg.: for specification and ordering quote


Code: SPPL.SE.PTS.RI

**Features and Benefits:**

- 316 grade stainless steel construction with no.4 finish
- Active Infrared touch-free operation
- 2, 5, 10, 15, 20 & 30 second run time
- Sensor range of 1-10 seconds
- Wave-on and off operation
- Anti vandal time - 30 seconds, 1, 2, 4 & 8 minutes
- Automatic purge - ON/OFF
- Purge run time of 30 seconds, 1, 2, 4 & 8 minutes
- Lock outs OFF, 4, 6, 8 & 10 ops
- Sits flush within wall

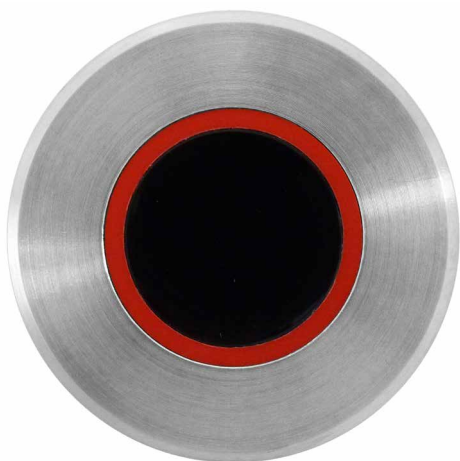

Front View

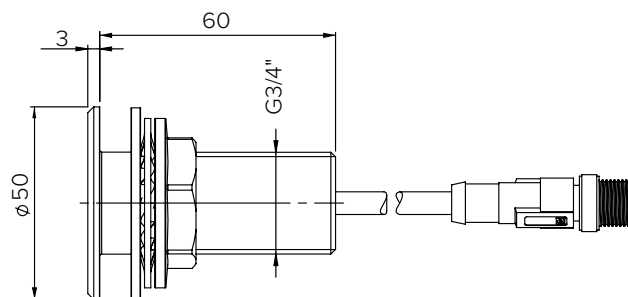

End View

**Specifications:**

Construction:	316 grade stainless steel construction, No.4 finish
Gross Weight:	0.2kg
Operation:	Active Infrared touch-free, wave on & off operation
Unit Fixing:	ø27mm drill hole required for wall mounting of unit. Sensor sits flush within wall.

Model No.	L x Dia (mm)
SPPL.SE.PTS.RI	63 x Ø50

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 20/05/2021

[www.stoddart.com.au](http://www.stoddart.com.au)

[www.stoddart.co.nz](http://www.stoddart.co.nz)


Tactile Switch

**Model: SPPL.SE.T.RI**

SPPL = Stoddart Plumbing Product  
 SE = Safe Ensuite  
 T = Tactile Switch  
 RI = Red Insert  
 eg.: for specification and ordering quote  
 Code: SPPL.SE.TS.RI

**Features and Benefits:**

- 316 grade stainless steel construction with no.4 finish
- Tactile switch operation
- 3m long cable
- Red insert
- Compatible with a range of Stoddart products including, flush valves, wash basins and more

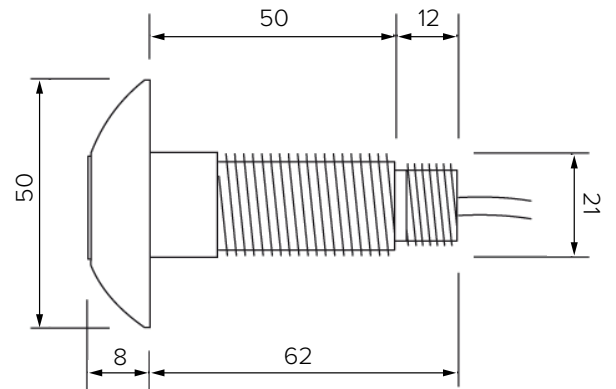

**End View**

**Specifications:**

Construction: 316 grade stainless steel construction, No.4 finish  
 Gross Weight: 0.2kg  
 Thread Diameter: ø21mm BSP  
 Operation: Tactile Switch  
 Unit Fixing: ø22mm drill hole required for wall mounting of unit. Cable length of 3m.

Model No.	L x Dia (mm)
SPPL.SE.TS.RI	70 x Ø50

Due to continuous product research and development, the information contained herein is subject to change without notice.  
 Revision: A -20/05/2021

## Tactile Switch

**Model: SPPL.SE.T.BI**

SPPL = Stoddart Plumbing Product

SE = Safe Ensuite

T = Tactile Switch


BI = Blue Insert

eg.: for specification and ordering quote

Code: SPPL.SE.TS.BI

**Features and Benefits:**

- 316 grade stainless steel construction with no.4 finish
- Tactile switch operation
- 3m long cable
- Blue insert
- Compatible with a range of Stoddart products including, flush valves, wash basins and more

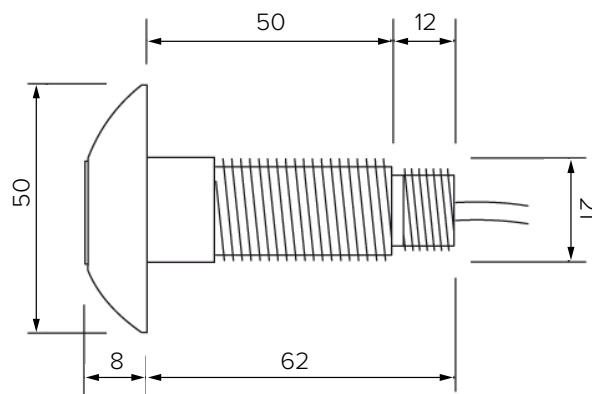

**End View**

**Specifications:**

- Construction: 316 grade stainless steel construction, No.4 finish
- Gross Weight: 0.2kg
- Thread Diameter: ø21mm BSP
- Operation: Tactile Switch
- Unit Fixing: ø22mm drill hole required for wall mounting of unit. Cable length of 3m.

Model No.	L x Dia (mm)
SPPL.SE.TS.BI	70 x Ø50

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 20/05/2021

## Programmable Tap Sensor - Wall Mounted

**Model: SPPL.SE.PTS.BI**



SPPL = Stoddart Plumbing Product  
 SE = Safe Ensuite  
 PSS = Programmable Tap Sensor  
 BI = Blue Insert

eg.: for specification and ordering quote


Code: SPPL.SE.PTS.BI

**Features and Benefits:**

- 316 grade stainless steel construction with no.4 finish
- Active Infrared touch-free operation
- 2, 5, 10, 15, 20 & 30 second run time
- Sensor range of 1-10 seconds
- Wave-on and off operation
- Anti vandal time - 30 seconds, 1, 2, 4 & 8 minutes
- Automatic purge - ON/OFF
- Purge run time of 30 seconds, 1, 2, 4 & 8 minutes
- Lock outs OFF, 4, 6, 8 & 10 ops
- Sits flush within wall

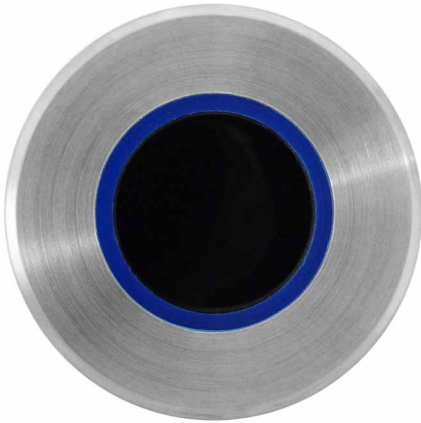

**Front View**

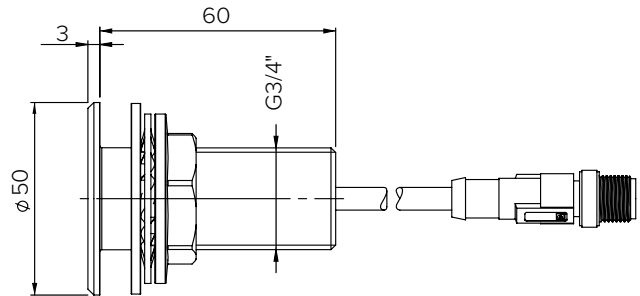

**End View**

**Specifications:**

Construction: 316 grade stainless steel construction, No.4 finish  
 Gross Weight: 0.2kg  
 Operation: Active Infrared touch-free, wave on & off operation  
 Unit Fixing: ø27mm drill hole required for wall mounting of unit. Sensor sits flush within wall.

Model No.	L x Dia (mm)
SPPL.SE.PTS.BI	63 x Ø50

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 20/05/2021

## Anti-Vandal Wave-on Sensor - Wall Mounted

**Model: SPPL.SE.S.RI.VR**

SPPL = Stoddart Plumbing Product

SE = Safe Ensuite

S = Sensor

RI = Red Insert


VR = Vandal Resistant

eg.: for specification and ordering quote

Code: SPPL.SE.S.RI.VR

**Features and Benefits:**

- Anti-vandal wave-on sensor with red insert
- Durable chrome brass construction with a polished finish
- Red indication insert
- Active infrared touch-free operation
- Adjustable settings used with control box
- 3m long cable
- Sits flush within wall
- Compatible with a range of Stoddart plumbing products including WC flush valve control system and tap control system

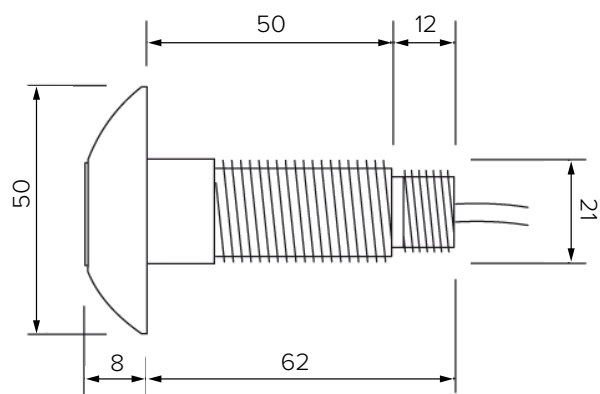**End View****Specifications:**

Construction:	Polished Chrome Brass
Gross Weight:	0.2kg
Operation:	Active Infrared touch-free, operation with adjustable settings dictated by control box used
Unit Fixing:	ø22mm drill hole required for wall mounting of unit. ø21 thread diameter and 3m long cable Sensor sits flush within wall.

Model No.	L x Dia (mm)
SPPL.SE.S.RI.VR	70 x Ø50

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 20/05/2021

[www.stoddart.com.au](http://www.stoddart.com.au)

[www.stoddart.co.nz](http://www.stoddart.co.nz)


## Anti-Vandal Wave-on Sensor - Wall Mounted

**Model: SPPL.SE.S.BI.VR**

SPPL = Stoddart Plumbing Product  
 SE = Safe Ensuite  
 S = Sensor  
 BI = Blue Insert  
 VR = Vandal Resistant  
 eg.: for specification and ordering quote  
 Code: SPPL.SE.S.BI.VR

**Features and Benefits:**

- Anti-vandal wave-on sensor with red insert
- Durable chrome brass construction with a polished finish
- Blue indication insert
- A.I.R active infrared touch-free operation
- Adjustable settings used with control box
- 3m cable length
- Sits flush within wall
- Compatible with a range of Stoddart plumbing products including WC flush valve control system and tap control system

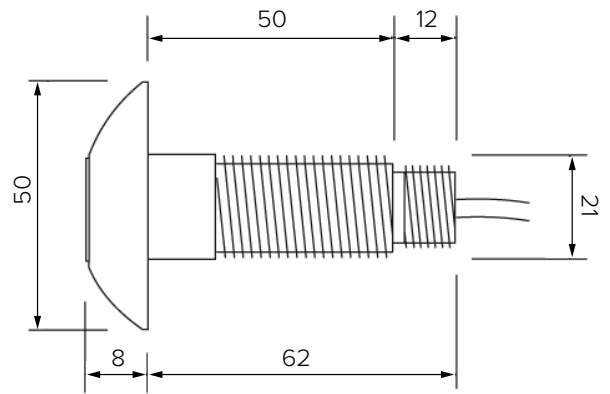

**End View**

**Specifications:**

Construction: Polished Chrome Brass  
 Gross Weight: 0.2kg  
 Operation: Active Infrared touch-free, operation with adjustable settings dictated by control box used  
 Unit Fixing: ø22mm drill hole required for wall mounting of unit. ø21 thread diameter and 3m long cable  
 Sensor sits flush within wall.

Model No.	L x Dia (mm)
SPPL.SE.S.BI.VR	70 x Ø50

Due to continuous product research and development, the information contained herein is subject to change without notice.  
 Revision: A-20/05/2021





**Page Intentionally Left Blank**



woodson

Culinaire

ASADO

Halton

CookTek

Electrolux  
PROFESSIONAL

airex

ANETS

STODDART  
PLUMBING PRODUCTS

GIORIK

AMERICAN RANGE

STODDART  
INFRASTRUCTURE

METRO

SIMPLY  
STAINLESS

ADANDE

power soak

TOWN&PARK

Perf  
a  
t

*Brisbane*

*Sydney*

*Melbourne*

*Perth*

*Adelaide*

**1300 79 1954**  
[www.stoddart.com.au](http://www.stoddart.com.au)


*Auckland*

**0800 79 1954**  
[www.stoddart.co.nz](http://www.stoddart.co.nz)

Manufactured or Imported  
& distributed exclusively by:



Find Stoddart Plumbing on:

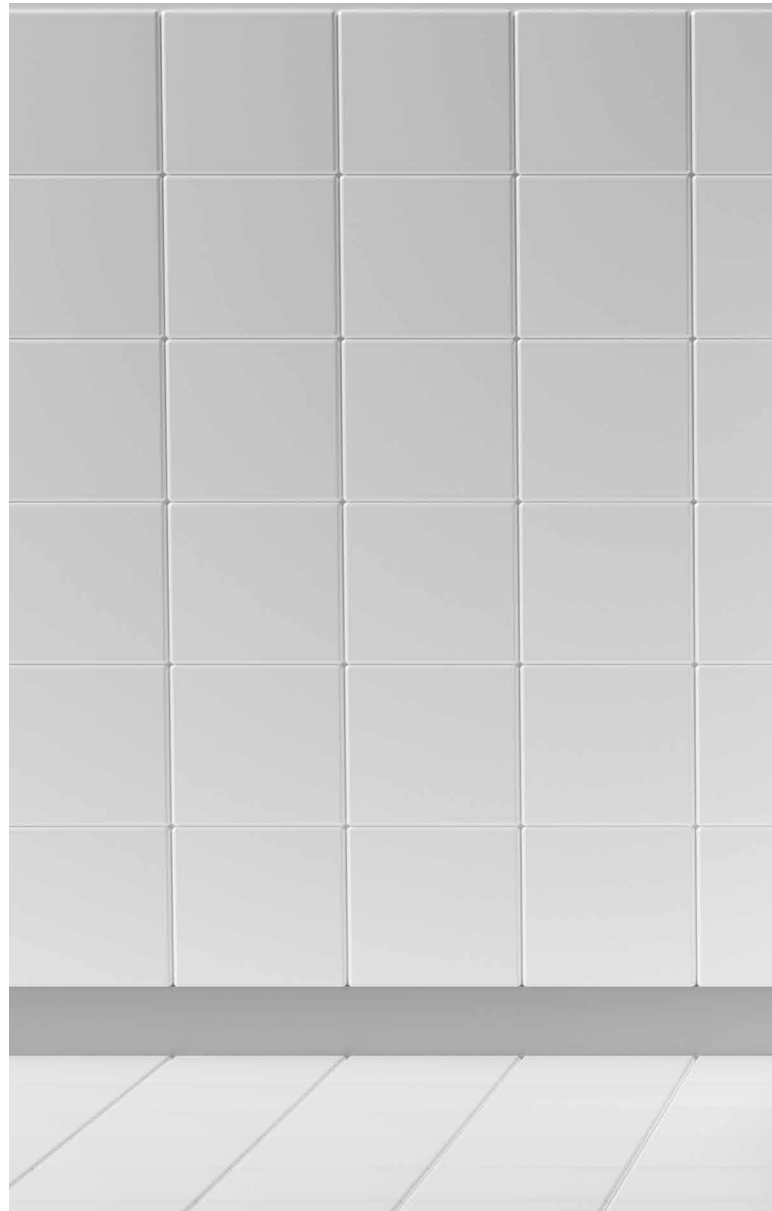

REV SE0521