

## Pre-Rinse Tap ware kits Installation Instructions




Spout Flow Rate : 8.3 L/Min.  
 Spray Valve Flow Rate : 5.7L/Min.  
 Max. Water Temperature : 80°C  
 Min. Water Temperature : 1°C  
 Min. Working Pressure : 150kPa  
 Max. Working pressure : 1000Kpa

### Step 1

Mount your Tap body to the sink or other application utilized in the drawings below.

#### Deck Mount Dual Valve

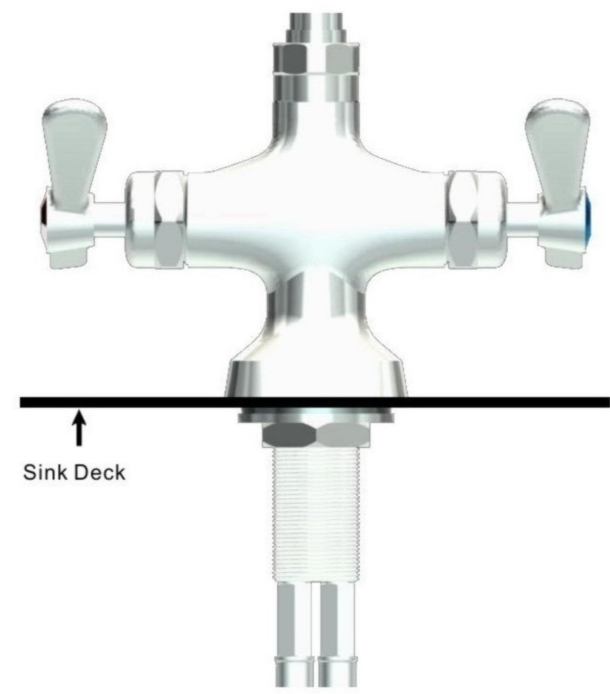

#### TAP Installation Notes:

MOUNTING KITS ARE NOT INCLUDED WITH ALL MODELS, HOWEVER ARE AVAILABLE IF NEEDED. PLEASE INQUIRE WITH YOUR PLUMBING SUPPLIER.

#### Required Tools and Installation Notes:

You will need the following tools to install your new Tap  
 Two adjustable wrenches, Phillips screwdriver,  
 saw for cutting metal, Teflon tape or approved compound for  
 sealing the threaded pipe connections.



### Step 2

Insert the add on tap on the body

Screw the tap on the body and use the adjustable wrenches to tight it.



### Step 3

Fix the bracket to the wall.

Use the screwdriver to fix the bracket to the wall.



### Step 4

Insert washer into hose.

Make sure that the appropriate washer that is included separately in your box is placed in the end of the pre-rinse hose.



### Step 5

Connect spray head to the pipe

Take the pre-rinse spray head, put on the pipe and use a wrench to tighten the connections.



### Step 6

Tighten all fittings with wrench.

Check and tighten all connections before turning on water supply to prevent leaks.



### Step 7

Fixed the spout on the add on tap.

Take the spout and use a adjustable wrench to tighten it on the add on tap

#### Installation Completion Notes:

If any leaking is noted after the water supply is turned on, shut off water supply once again and check the affected area. Tighten the connection and repeat process until leak is no longer present. If problem persists, remove and reapply Teflon tape or appropriate compound.



#### Warranty Information:

Thank you for purchasing Xsential Tap. A dedication to quality has enabled us to provide what we believe to be the finest quality commercial Tap available. To support this claim we are pleased to offer this guarantee against defects in material and/or workmanship for a period of two year from date of purchase. Liability, in the event of defect(s) is limited to, at Xsential's Discretion, replacement of the defective unit. Xsential will neither bear any responsibility for freight damages or labor cost as a result of any defects. The customer must handle any claims against the carrier. Returned product will neither be accepted, replaced nor credited without prior written authorization from Xsential. This warranty shall take precedence over any other, either expressed or implied Xsential of any of its agents.

Supplied by Tom Stoddart Pty Ltd  
 39 Forest Way,  
 Karawatha 4117  
 Ph: 1300 79 1954  
[www.stoddart.com.au](http://www.stoddart.com.au)