

ORDER FORM - DROP-IN BENCH





Project / Job No.

Customer:


Room No. Location

PO Number:

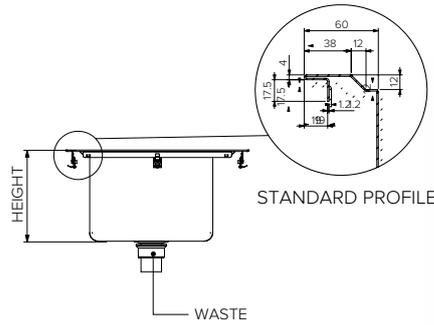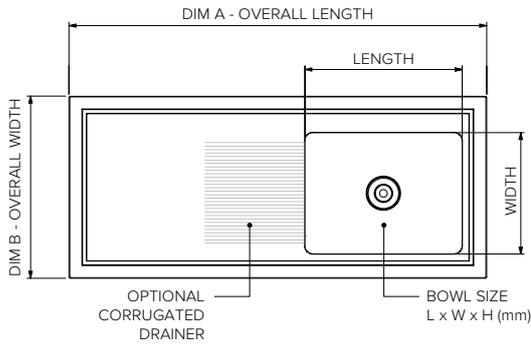

Detail	Options (please specify between the range below)	Selection
Overall Length (DIM A)	600 - 4000 (mm)	
Overall Width (DIM B)	500 - 800 (mm)	
Grade of Stainless	304 (standard) OR 316 (acid resistant)	
Waste Options	B90 = 90mm Basket OR P50 = 50mm Poly OR S50 = 50mm Stainless OR C50 = 50mm Chrome Plated OR PVC50 = 50mm PVC	

BOWL POSITION / NO. OF BOWLS

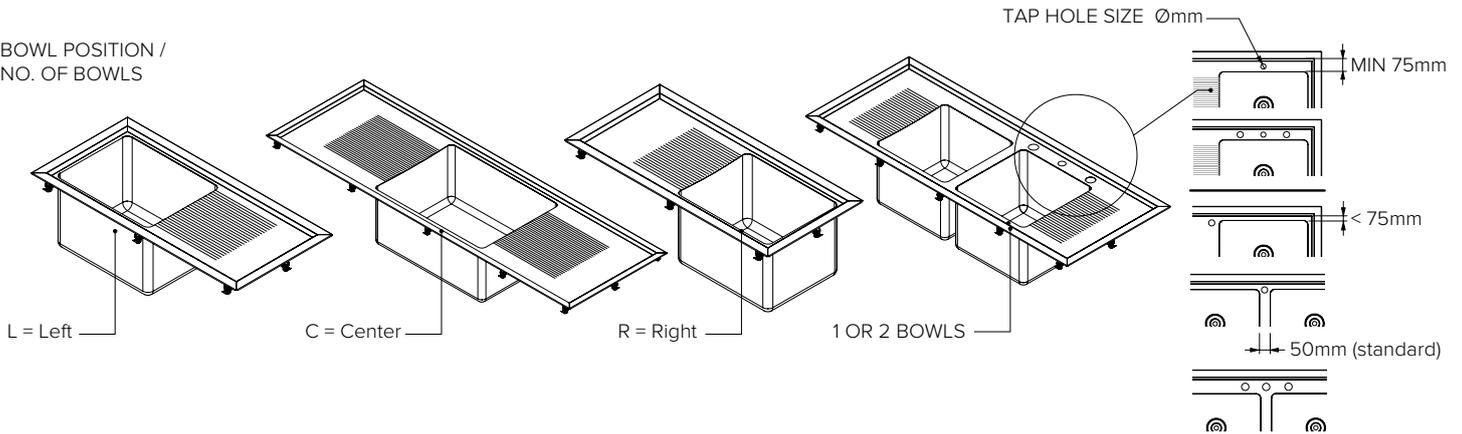

If more than one sized bowl and variation is required, please select the bowl, size, position, waste and tap hole information on the table below. If there are more than 1 sized tap hole, or the size is not listed, please provide additional information below.

Bowl Size (L x W x H)	Bowl 1.	Bowl Position L/R/C	Waste	No. of Tapholes	Tap Hole Size	Bowl 2.	Bowl Position L/R/C	Waste	No. of Tapholes	Tap Hole Size
450 x 350 x 250 (mm)					Ø					Ø
400 x 400 x 300 (mm)					Ø					Ø
450 x 450 x 300 (mm)					Ø					Ø
600 x 450 x 300 (mm)					Ø					Ø
380 x 330 x 150 (mm)					Ø					Ø

NOTE: Tapholes positioned behind the bowl require a minimum of 75mm tap landing.


*when specifying bowl size / width of bench, keep this in mind. eg. 525mm bench width would require a max bowl width of 350mm .

For less than 75mm clearance, tapholes will be positioned to the left or right side for single bowls and centre for double bowls (as pictured above).


On the bowls below, please specify the location of required tap holes (If there are any issues with placement selections, a Stoddart representative will be in contact).

TAPWARE POSITION

EXAMPLE




SINGLE BOWL

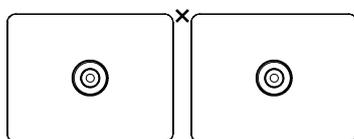


DOUBLE BOWL


YOUR SELECTIONS



SINGLE BOWL



DOUBLE BOWL



SINGLE OPTION

DOUBLE OPTION

Revision: March 14, 2023 1:21 PM

www.stoddart.com.au

www.stoddart.co.nz

