

## Toilet and Basin Security Combination Unit - Square

### Model: SPPL.TP.CS.x.yyy.zz

SPPL = Stoddart Plumbing Product  
 TP = Toilet Pan  
 CS = Combination, Square  
 x = T = Toilet roll holder  
 yyy = FA = Front access  
 = RA = Rear duct access  
 zz = ED = Electronic dual flush  
 = ES = Electronic single flush  
 = ER = Electronic, remote

eg.: for specification and ordering quote


Code: SPPL.TP.CS.T.RA.ED

**NOTE: For additional variations please contact your Stoddart representative**




### Features and Benefits:

- **2mm stainless steel shroud for superior strength**
- **3mm extra heavy duty spec optional**
- Concealed plumbing and fixings for vandal resistance
- Toilet pan seat has an anti-contraband flushing rim for effective cell inspection and is profiled for user comfort, improved hygiene and safety
- All external corners are rounded with a smooth radius for improved safety
- Basin has a cell-safe security drain
- Low profile, domed bubbler and wedge. Providing improved anti-ligature safety while controlling water flow for hand washing and drinking to 2L/min
- Water conserving security bubbler controls water flow for hand washing and drinking to 1.5L/min
- Low profile, domed bubbler and wedge provides improved ligature resistant
- Electronic Piezo buttons and flow controller can easily be interfaced to water management control. Buttons can be positioned in the body or remote from the unit
- Electronic (single or dual) flush and electronic bubbler activation provides maximum security
- Optional toilet roll holder can be integrated into front or side panel
- Rear access option is preferred for high security prisons and detention centres



Plan View



Rear View

### Specifications:


**Construction:** 2mm thick, 304 stainless steel no.4 satin finish

**Flushing:** Flush valve installation should have water pressure regulated between 250kPa and 500kPa and have a flow rate between 1.2 and 1.5 L/s to the valve face


**Water Connection:** 25mm mains connection to flush valve. 15mm main connection to basin valve

**Waste Connection:** P trap standard, 95mm OD stainless steel spigot with rubber coupling included to suit 100mm PVC or copper sewer pipe. 40mm threaded basin connection to suit PVC trap.

**Unit Fixing:** The unit is designed to be fixed to both the floor and the rear wall. Z clip provides easy floor fixing.



Front View

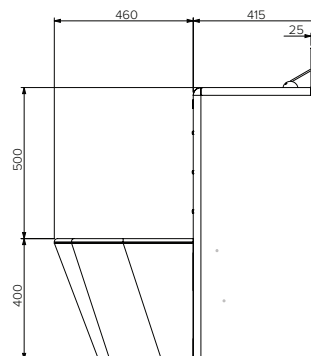

End View

Model No.	L x D x H (mm)	
SPPL.TP.CS	430 x 875 x 1050	
	Inlet Height	Outlet Height
	360	191 ± 3



Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: B - 16/05/2023

[www.stoddart.com.au](http://www.stoddart.com.au)

[www.stoddart.co.nz](http://www.stoddart.co.nz)