

**SPECIFICATION, INSTALLATION
AND OPERATION MANUAL**
READ ALL INSTRUCTIONS BEFORE USE



Models:
AXR.FDFSSQ.09 / AXR.FDFSSQ.12 / AXR.FDFSSQ.15

Page Intentionally Left Blank

1.0 Introduction		
1.1 Your New Airex Product	3	
1.2 Australia and New Zealand Warranty	4	
1.2.1 Warranty Period		
1.2.2 Warranty Registration		
1.3 General Precautions	4	
2.0 Installation		
2.1 Product Overview	5	
2.2 Setting Up	6	
2.2.1 Handling		
2.2.2 Unpacking		
2.2.3 Positioning		
2.3 Refrigeration	7	
2.3.1 Climate Classes		
2.4 Electrical Connection	7	
2.5 Plumbing	7	
2.6 Adjustable Shelves	8	
2.6.1 Shelf Height Adjustment		
2.7 Rear Sliding Doors	8	
2.7.1 Installing the Sliding Doors		
3.0 Specification		
3.1 Technical Specifications	9	
3.1.1 AXR.FDFSSQ.09		
3.1.2 AXR.FDFSSQ.12		
3.1.3 AXR.FDFSSQ.15		
4.0 Operation		
4.1 Initial Start-up & Operation	11	
4.1.1 Controller		
4.1.2 Initial Start Up		
4.1.3 Food Temperature		
4.1.4 Loading Restrictions		
4.1.5 After Service - Information		
4.1.6 After Service - Storage		
4.1.7 Defrost Cycle - Automatic		
4.1.8 Defrost Cycle - Manual		
4.2 Temperature Adjustment	13	
5.0 Cleaning and Maintenance		
5.1 Cleaning	14	
5.1.1 Cleaning Schedule		
5.1.2 Materials Required		
5.1.3 General Information		
5.1.4 Corrosion Protection		
5.1.5 Surface Finish		
5.1.6 Cleaning Schedule		
5.1.7 Materials Required		
5.1.8 Display (Daily)		
5.1.9 Doors		
5.1.10 Display Glass		
5.1.11 External Surfaces		
5.1.12 Ventilation Panels / Filter		
5.1.13 Condenser		
5.2 Troubleshooting	16	
5.2.1 Troubleshooting Procedures		
5.3 Disposal	17	

1.1 Your New Airex Product

Thank you for choosing this quality Airex product.

All Airex products are designed and manufactured to meet the needs of food service professionals. By caring for and maintaining this new Airex product in accordance with these instructions, will provide many years of reliable service.

Stoddart is a wholly Australian owned company, which manufactures and/or distributes a comprehensive range of food service equipment for kitchens, food preparation and presentation. Stoddart products are manufactured and engineered to provide excellent results whilst offering value-for-money, ease-of-use and reliability.

Carefully read this instruction booklet, as it contains important advice for safe installation, operation and maintenance. Keep this booklet on hand in a safe place for future reference by other operators or users.

Disclaimer

The manufacturer/distributor cannot be held responsible or liable for any injuries or damages of any kind that occur to persons, units or others, due to abuse and misuse of this unit in regards to installation, removal, operation, servicing or maintenance, or lack of conformity with the instructions indicated in this documentation.

All units made by the manufacturer/distributor are delivered assembled, where possible, and ready to install. Any installation, removal, servicing, maintenance and access or removal of any parts, panels or safety barriers that is not permitted, does not comply in accordance to this documentation, or not performed by a **TRAINED AND AUTHORISED SPECIALIST** will result in the **IMMEDIATE LOSS OF THE WARRANTY.**

The manufacturer/distributor cannot be held responsible or liable for any unauthorised modifications or repairs. All modifications or repairs must be approved by the manufacturer/distributor in writing before initiating. All modifications or repairs performed to this unit must be performed at all times by a **TRAINED AND AUTHORISED SPECIALIST.**

Stoddart design, manufacture & distribute Food Service Equipment (appliances) exclusively for the commercial market. This appliance is not designed nor intended for household or domestic use and must not be used for this purpose.

This product is intended for commercial use, and in line with Australian electrical safety standards the following warnings are provided:

- This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning the use of the product by a person responsible for their safety. Children should be supervised to ensure that they do not play with the product
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard



Warranty & Registration

1.2 Australia and New Zealand Warranty

1.2.1 Warranty Period

All Stoddart manufactured and distributed products are covered by Stoddart's standard Australia and New Zealand Product Warranty (minimum 12 month on-site parts and labour, terms and conditions apply). Further to this standard warranty, certain products have access to an extended warranty. Full terms, conditions and exclusions can be found using the below Link/QR code.

1.2.2 Warranty Registration

To register your new product, Follow the below Link/QR code.



www.stoddart.com.au/warranty-information

1.3 General Precautions


When using any electrical unit, safety precautions must always be observed.

Our units have been designed for high performance. Therefore, the unit must be used exclusively for the purpose for which it has been designed.

- All units **MUST** be installed according to the procedures stated in the installation section of this manual
- In the case of new personnel, training is to be provided before operating the equipment
- **DO NOT** use this unit for any other purpose than its intended use
- **DO NOT** store explosive substances such as aerosol cans with a flammable propellant in or near this unit
- Keep fingers out of "pinch point" areas
- Unit is not waterproof **DO NOT** use jet sprays, hoses or pour water over/on the exterior of the unit
- Only use this unit with voltage specified on the rating label
- **DO NOT** remove any cover panels that may be on the unit
- **DO NOT** use sharp objects to activate controls
- **DO NOT** use sharp objects to remove ice from the unit
- If any fault is detected, refer to troubleshooting
- The manufacturer declines any liability for damages to persons and/or things due to an improper/wrong and/or unreasonable use of the machine
- Only specifically trained/qualified Technicians (Stoddart, one of our service agents, or a similarly qualified persons) should carry out any and all repairs, maintenance and services

2.1 Product Overview

	IMPORTANT
	<p>This unit is not designed to cool down hot/warm product. It only maintains the product at the controlled 2°C - 5°C</p>
	CAUTION
	<p>This unit includes refrigeration components. Cold surfaces can burn DO NOT touch these surfaces</p>

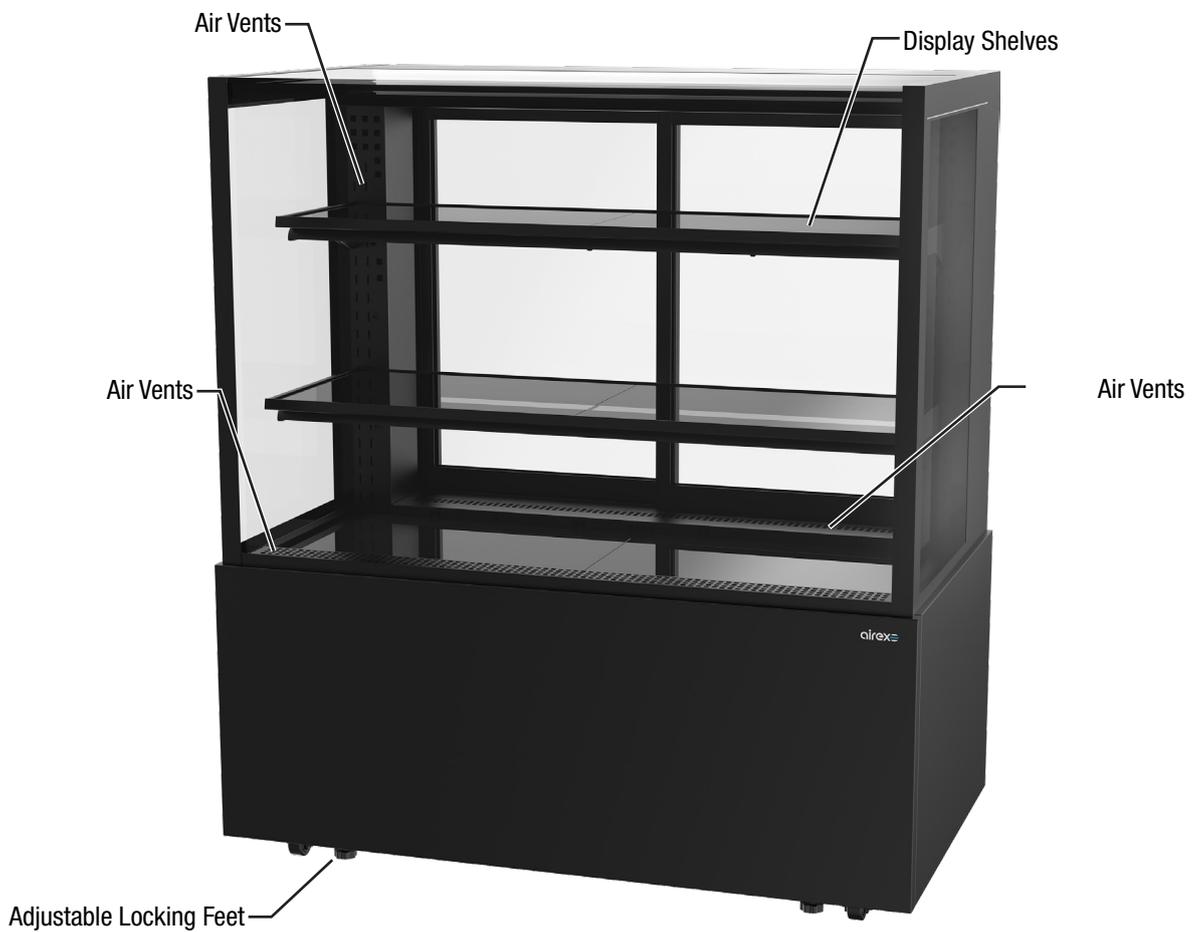

2.2 Setting Up

	WARNING
	<p>Improper installation, adjustments, alterations, service or maintenance can cause property damage, injury or death.</p>

2.2.1 Handling


- Use suitable means to move the unit;
 - For smaller items use two people
 - For large items a fork lift, pallet trolley or similar (the forks should reach completely beneath the pallet)

2.2.2 Unpacking

- Check the unit for damage before and after unpacking. If unit is damaged, contact the distributor and manufacturer
- Should any item have physical damage, report the details to the freight company and to the agent responsible for the dispatch within 48 hours of receipt. No claims will be accepted or processed after this period
- The unit is supplied fully assembled
- Remove all protective plastic film, tapes, ties and packers before installing and operating
- Clean off any remaining residue from the interior/exterior of the unit using a clean cloth dampened with warm soapy water
- Attach the supplied spacer brackets to the back of the unit

2.2.3 Positioning

- When moving the unit, ensure the cabinet is upright at all times
- When positioning the unit, avoid direct sunlight, warm drafts and heated areas for the unit to maintain the normal operating temperature
- Do not position the unit in:
 - Wet areas
 - Near heat and/or steam sources
 - Near flammable substances
- Ensure the unit is positioned on a level surface to allow all the condensation to properly burn off and prevent the burn off tray overflowing
- An air gap is not required for the sides and front of the display (customer facing side)
- Cabinetry should not extend past the base of the unit covering the glass
- **Note:** For instances where cabinetry extends past the base, please contact your Stoddart representative to discuss further
- After positioning the unit, allow the refrigeration gas to settle for at least 2 hours before switching ON
- Please consult national and local standards to ensure that your unit is positioned in accordance with any existing requirement

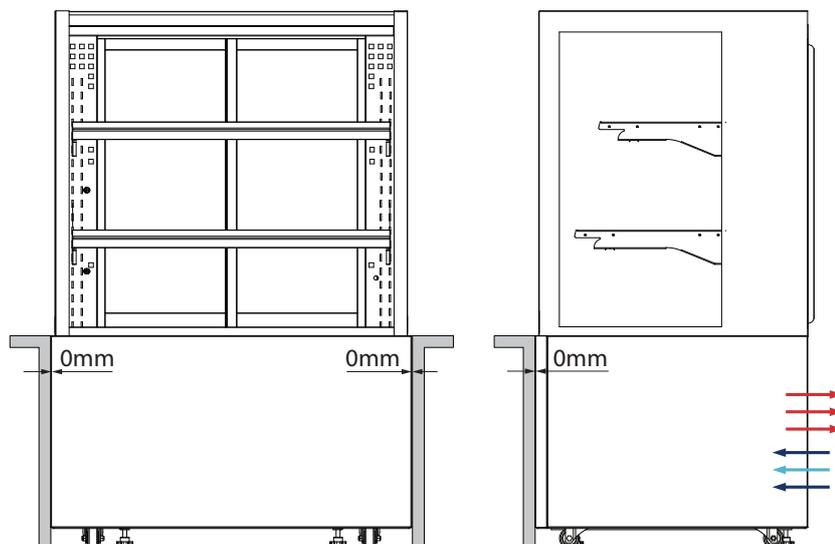

Due to continuous product research and development, the information contained herein is subject to change without notice.

2.3 Refrigeration

The system is fully operational as soon as it leaves the factory. No addition setup is required.

	Warning
	<p>SYSTEM CHARGED WITH FLAMMABLE REFRIGERANT</p> <p>R290</p> <p>This unit must be serviced in accordance with AS/NZS 1677:1998</p>

2.3.1 Climate Classes

The unit has been designed and tested to operate at climate class 4M1. Refer to the Technical Specifications of this manual or the unit rating label for the climate class number.

CLIMATE CLASSES		
Test Room Climate Class	Ambient temperature °C	Relative humidity %
0	20°C	50
1	16°C	80
2	22°C	65
3	25°C	60
4	30°C	55
5	40°C	40
6	27°C	70
7	35°C	75
N	+16°C - +32°C	-
SN	+10°C - +32°C	-
ST	+18°C - +38°C	-
T	+18°C - +43°C	-

2.4 Electrical Connection

	WARNING
	<p>This unit must be installed in accordance with local electrical regulations/requirements.</p> <p>Some procedures in this manual require the power to the equipment to be turned off and isolated. Turn the power OFF at the power point and unplug the power supply lead by the plug body. If the power point is not readily accessible turn the equipment off at the isolation switch or the circuit breaker in the switchboard. Attach a yellow “CAUTION-DO NOT OPERATE” tag. This must be performed where relevant unless the procedures specify otherwise.</p> <p>FAILURE TO DO SO MAY RESULT IN ELECTRIC SHOCK.</p>

Single Phase Units:

- Supplied and fitted with an appropriately rated plug and lead, indicated as:
 - 10A plug & lead fitted

Notes:

- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard. Please contact Stoddart for parts and we will advise how to do this in order to avoid any electrical hazard
- The power cable should be dry and/or isolated from moisture or water

2.5 Plumbing

The unit is supplied with a condensate burn-off tray. No additional drainage or plumbing is required.


2.0 Installation

2.6 Adjustable Shelves

The adjustable shelves come preinstalled. Glass must be installed by the user (2 pieces of glass per shelf)

2.6.1 Shelf Height Adjustment

1. Remove the glass from the shelf
2. Disconnect the LED power lead on the inside of the shelf arm
3. Lift the shelf assembly up and out from its current position
4. Raise/lower the shelf assembly to the required height. Insert two shelf assemblies into the vertical slots (ensure shelf arms are positioned at the same height)
5. Connect the LED power lead on the inside of the shelf arm to the nearest socket
6. Install the glass panels


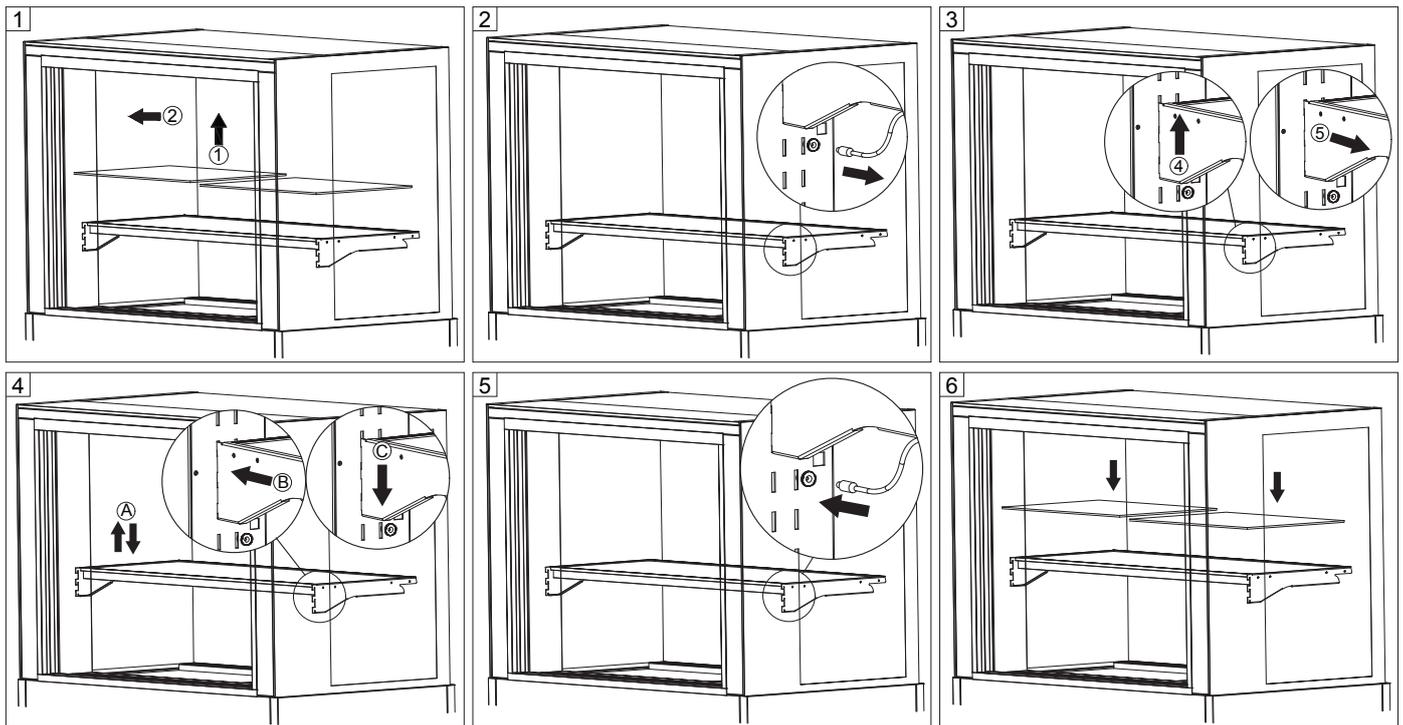


2.7 Rear Sliding Doors

2.7.1 Installing the Sliding Doors

Note: When inserting, ensure the rollers on the door are at the bottom to place on the door rail. Ensure the first door is placed on the back rail to allow the second door to be inserted.

1. Insert the top into the top door INSERT and push UP
2. Swing the door IN
3. Drop the door DOWN into the door track
4. Slide door across
5. Repeat for the second door

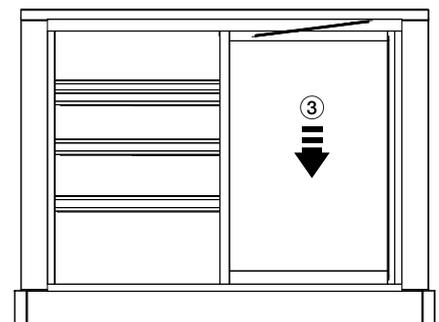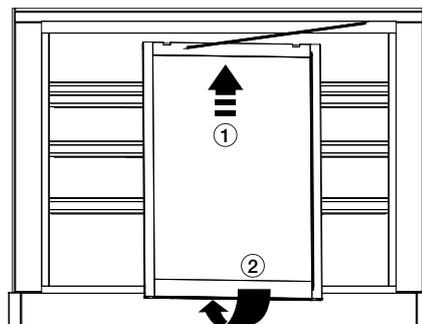


3.1 Technical Specifications

3.1.1 AXR.FDFSSQ.09

Specifications


Model	AXR.FDFSSQ.09
W x D x H (mm)	900 x 696 x 1350
Weight	162kg
Packed Dimensions (mm)	980 x 750 x 1550
Packed Weight	196kg
Net Capacity	350 Litres
Operation	2°C - 5°C
Refrigerant	R290
Climate Class	4M1
Energy Consumption	10.79kWh/24hr
Max Ambient	35°C
Total Connected Load	0.76kW
Electrical Connection	230VAC / 50Hz (10A plug & lead)

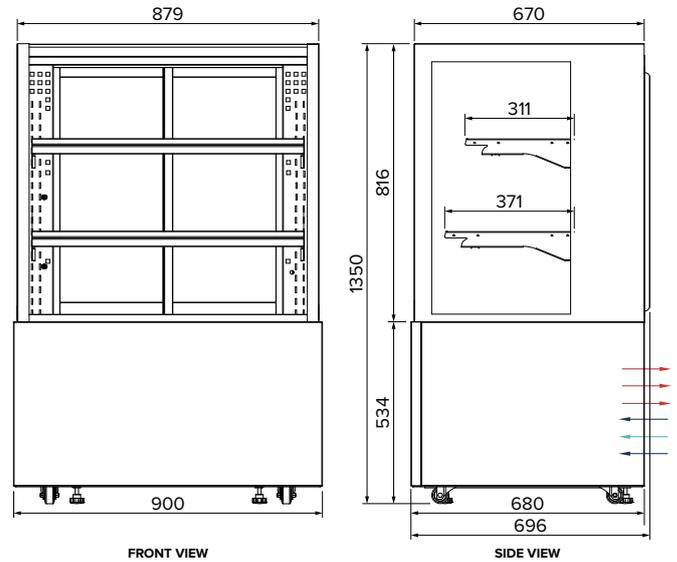

3.1.2 AXR.FDFSSQ.12

Specifications

Model	AXR.FDFSSQ.12
W x D x H (mm)	1200 x 696 x 1350
Weight	192kg
Packed Dimensions (mm)	1280 x 750 x 1550
Packed Weight	232kg
Net Capacity	560 Litres
Operation	2°C - 5°C
Refrigerant	R290
Climate Class	4M1
Energy Consumption	14.24kWh/24hr
Max Ambient	35°C
Total Connected Load	0.91kW
Electrical Connection	230VAC / 50Hz (10A plug & lead)

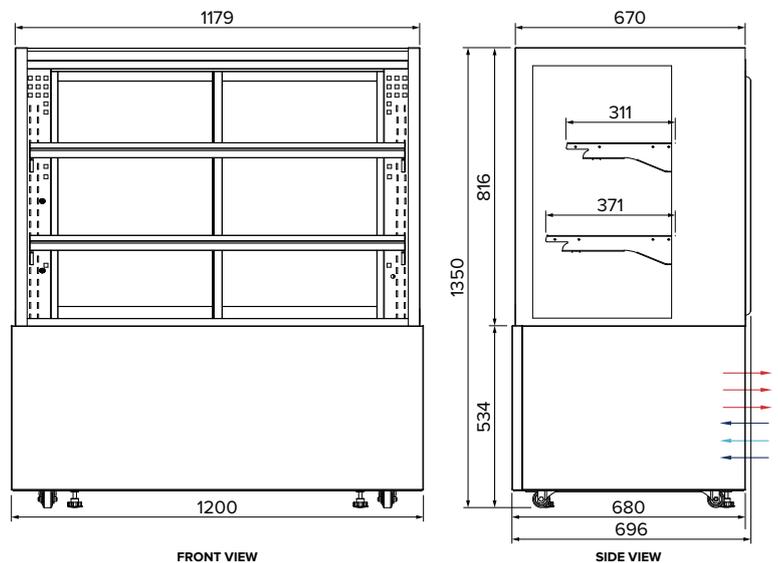


3.0 Specification



3.1.3 AXR.FDFSSQ.15

Specifications

Model	AXR.FDFSSQ.15
W x D x H (mm)	1500 x 696 x 1350
Weight	235kg
Packed Dimensions (mm)	1580 x 750 x 1550
Packed Weight	289kg
Net Capacity	625 Litres
Operation	2°C - 5°C
Refrigerant	R290
Climate Class	4M1
Energy Consumption	17.9kWh/24hr
Max Ambient	35°C
Total Connected Load	1.1kW
Electrical Connection	230VAC / 50Hz (10A plug & lead)

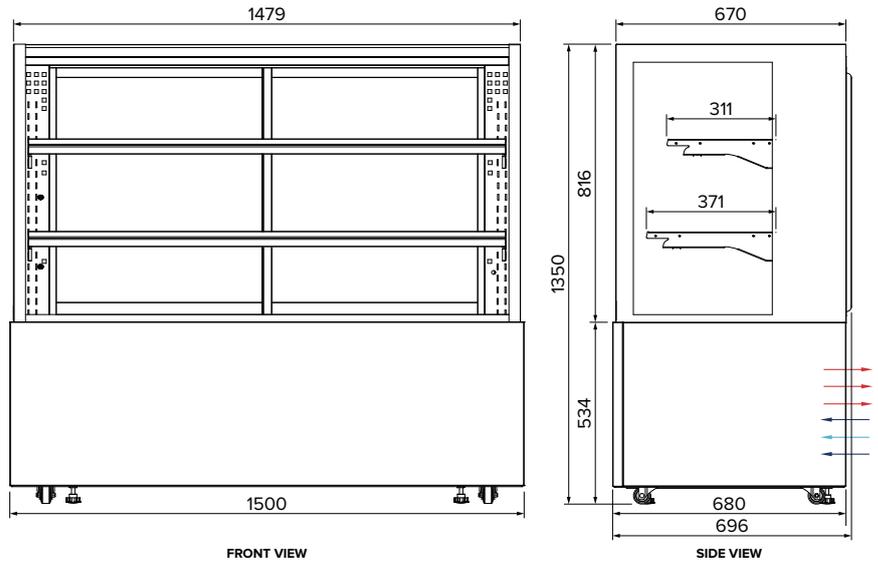

Due to continuous product research and development, the information contained herein is subject to change without notice.


www.stoddart.com.au

www.stoddart.co.nz

4.1 Initial Start-up & Operation

	IMPORTANT
	<p>This unit is not designed to cool down products, it only maintains them at the controlled 2°C - 5°C</p>

4.1.1 Controller

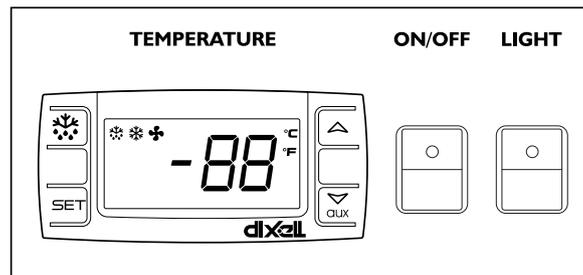

4.1.2 Initial Start Up

- Before switching ON the unit, ensure the unit is installed correctly
- Once switched ON, check that the air is flowing within the unit
- After 45 minutes check the cabinet temperature has reached 2°C - 5°C
- Leave the unit to operate for 1-2 hours to remove any fumes or odours
- Clean the whole unit, including the shelves, before placing in product

4.1.3 Food Temperature

- Ensure the unit is maintaining temperature is between 2°C - 5°C
- Ensure the doors are CLOSED when not loading to maintain temperature
- **DO NOT** place warm/hot items in the unit to chill, placing warm/hot items in the unit can lead to food spoilage and possibly food poisoning

4.1.4 Loading Restrictions

- Air vents must **NOT** be covered
- There should **NOT** be any overhang of products on the shelves
- Shelves are only designed to hold one layer of product. Overloading can break/damage the shelves
- Remove some products if the shelves are flexing or bending
- Shelves should be adjusted to allow air space around all the product for even refrigeration and efficient operation of the refrigerator. Leave an air space of at least 50mm above the product for air circulation

4.1.5 After Service - Information

- The unit does not need to be turned OFF after service
- The unit will maintain set temperature after service
- Switch OFF lights to minimise power. Ensure doors are closed

4.1.6 After Service - Storage

- Products can either be stored in the unit (If the unit is left on) or placed in night storage
- Do NOT place warm items in the unit to chill over night
- All storage of product should comply with local health standards and regulations

4.1.7 Defrost Cycle - Automatic

- The system has an automatic defrost system which improves the energy efficiency of the unit and minimises temperature fluctuations
- After the unit is first switched ON, the first defrost cycle will occur automatically after 6 hours.
If the unit is NOT turned OFF, the unit will defrost automatically four times per day or every 6 hours
- If air is not circulating properly, a manual defrost cycle can be made. Normal automatic defrost cycles will still occur every 6 hours even if a manual cycle has been run in between cycles. Check the electronic controller section for more information
- The defrost cycle terminates when the temperature of the evaporator coil rises to 6°C or after 30 minutes. Products will remain refrigerated during defrost cycle if the doors remain closed
- For changing of defrost cycle settings, contact Stoddart or an approved service technician

4.1.8 Defrost Cycle - Manual


The unit may need to be manually defrosted:

1. Press and hold the DEFROST ❄️ button for 5 seconds
2. The defrost cycle will start immediately and the defrost LED illuminates. The defrost will last a maximum of 30 minutes

4.2 Temperature Adjustment

- The temperature range of this unit is 0°C - 6°C. The recommended temperature is 2°C - 4°C
- Different modes require different temperatures
- The temperature probe only measures the temperature of the water/air, NOT the food temperature

DIXEL CONTROL:

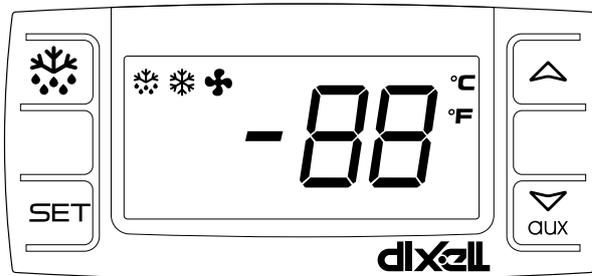

DISPLAY:

LED	MODE	DESCRIPTION
❄️	On	Compressor enabled
	Flashing	Anti short cycle delay enabled (AC parameter)
❄️	On	Defrost in progress
	Flashing	Dripping in progress
🌀	On	Fans output enabled
	Flashing	Fans delay after defrost
°C	On	Measurement unit
	Flashing	Programming mode
°F	On	Measurement unit
	Flashing	Programming mode

KEY FUNCTIONS:

SET	To display target set point; in programming mode it selects a parameter or confirm an operation.
❄️ (DEF)	To start a manual defrost push and hold the defrost button ❄️ for 2 seconds.
⬆️ (UP)	To see the maximum stored temperature; in programming mode it browses the parameter codes or increases the displayed value.
⬇️ (DOWN)	To see the minimum stored temperature; in programming mode it browses the parameter codes or increases the displayed value.

KEY COMBINATIONS:

⬆️ + ⬇️	To lock and unlock the keyboard.
SET + ⬇️	To enter in programming mode.
SET + ⬆️	To return to the room temperature display.

HOW TO SEE THE SET POINT:

1. Push and immediately release the **SET** key, the display will show the set point value
2. Push and immediately release the **SET** key or wait 5 seconds to display the probe value again

HOW TO SEE THE SET POINT:

1. Push the **SET** key for more than 3 seconds to change the set point value
2. The value of the set point will be displayed and the "°C" LED starts blinking
3. To change the set point value push the ⬆️ or ⬇️ arrows within 10 seconds
4. To store the new set point value push the **SET** key again or wait 10 seconds

HOW TO CHANGE A PARAMETER VALUE:

1. Enter the Programming mode by pressing the **SET** + ⬇️ keys for 3s (°C LED starts blinking)
2. Select the required parameter. Press the **SET** key to display its value
3. Use ⬆️ or ⬇️ to change the parameter value
4. Press SET to store the new parameter value and move to the following parameter
5. To Exit: Press **SET** + ⬆️ or wait 15 seconds without pressing any keys

Note: The set value is stored even when the procedure is exited by waiting the time-out to expire.

Note: To enter in programming mode. (Contact the Stoddart Service Department)

HOW TO LOCK/UNLOCK THE KEYBOARD:

1. To lock the keyboard press and hold the ⬆️ + ⬇️ for 3 seconds. The "OF" message will be displayed
2. To unlock the keyboard press and hold the ⬆️ + ⬇️ for 3 seconds. The "ON" message will be displayed

5.0 Cleaning and Maintenance

5.1 Cleaning

5.1.1 Cleaning Schedule

- Regular cleaning is recommended for the unit. This will help to maintain and prolong the efficiency of the unit

5.1.2 Materials Required

- Stainless Cleaner
- Non Abrasive Cleaning pad
- Clean Sanitised Cloth
- Paper Towel
- Warm Soapy Water
- Appropriate PPE (Personal Protective Equipment)

5.1.3 General Information

- Cleaning is recommended for health and safety purposes and to prolong the life of the unit
- DO NOT** use abrasive pads or cleaners on the stainless steel or any other metal parts of the unit
- DO NOT** use industrial chemical cleaners, flammable cleaners, caustic based cleaners or bleaches and bleaching agents, as many will damage the metals and plastics used on this unit
- DO NOT** remove any screws and/or panels for cleaning (unless directed)
- This unit is **NOT** waterproof, **DO NOT** hose, **DO NOT** pour water directly onto the unit, **DO NOT** immerse in water

5.1.4 Corrosion Protection

- Stainless steel exhibits good resistance to corrosion however, if not properly maintained stainless steel can rust and/or corrode
- Any sign of mild rust and/or corrosion should be thoroughly cleaned with warm soapy water and dried as soon as possible
- NEVER use abrasive pads or cleaners for cleaning
- All metal surfaces should be checked while cleaning for damage, scuffs or scrapes as these can lead to rust and further damage to the product
- Mild rust and/or corrosion can be treated with a commercial cleaning agent that contains citric/oxalic/nitric/phosphoric acid. **DO NOT** use cleaning agents with chlorines or other harsh chemicals as this can cause corrosion. After treatment, wash with warm (not hot) soapy water and dry thoroughly
- Thoroughly wipe the surfaces dry after cleaning. **DO NOT** let water pool on the unit. Check crevices and folds for pooling
- When using, ensure all liquids and moisture is cleaned up straight away. Food liquids such as juices from vegetables and fruits should not be left on preparation surfaces
- DO NOT** leave items on the stainless steel such as cutting boards, rubber mats and bottles

5.1.5 Surface Finish

- To protect the polished surface of the stainless steel, it should be dried using a clean dry soft cloth. A light oil can be applied to enhance the stainless steel surface, using a clean cloth apply the oil in the same direction as grained polished finish
- Some commercial stainless steel cleaners can leave residue or film on the metal; this may trap fine particles of food on the surface, thus deeming the surfaces not food safe

	<p style="text-align: center;">IMPORTANT</p> <p>Threaded fasteners can loosen in service. Regular inspection and adjustment should be carried out as required</p>		<p style="text-align: center;">WARNING</p> <p>This unit is NOT waterproof, DO NOT hose. DO NOT pour water directly onto the unit. DO NOT immerse in water</p>
	<p style="text-align: center;">IMPORTANT</p> <p>Some commercial stainless steel cleaners leave residue or film on the metal that may entrap fine particles of food, deeming the surface not FOOD SAFE</p>		<p style="text-align: center;">WARNING</p> <p>This unit includes refrigeration components. Cold surfaces can burn DO NOT touch these surfaces</p>

5.1.6 Display (Daily)

1. Isolate the unit from the power supply
2. Remove shelves and wash separately in a dishwasher or kitchen sink, thoroughly wipe dry after cleaning
3. Use a good quality nylon brush to remove crumbs and small food items
4. Clean using a clean cloth dampened (not wet) with clean warm soapy water until all soil has been removed
5. Thoroughly wipe dry with a soft cloth after cleaning, **DO NOT** allow to air dry. **DO NOT** let water pool, check crevices and folds

5.1.7 Doors

1. Remove sliding doors for cleaning. No organic solvent cleaners should be used on the mirrored glass
2. Clean the glass with a glass cleaner or warm (not hot) soapy water, and a sponge, wiping dry with a squeegee is best
3. Door frames should be cleaned as any other stainless steel or metal surface
4. Doors seals should be checked for cracks before cleaning
5. Sliding door tracks should be vacuumed out and cleaned using a clean cloth dampened (not wet) with clean warm soapy water until all soil has been removed
6. Tracks should be dried thoroughly before replacing the sliding doors

5.1.8 Display Glass


1. Clean the glass with a glass cleaner or warm (not hot) soapy water, and a sponge
2. Using a squeegee, remove all water from the glass

5.1.9 External Surfaces

1. Using a clean cloth dampened (not wet) with clean warm soapy water until any grime has been removed
2. Using a clean sanitised cloth, thoroughly wipe the stainless steel and metal parts dry. **DO NOT** let water pool on the unit, check crevices and folds

5.1.10 Ventilation Panels / Filter

1. Remove ventilation panel
2. Remove the filter
3. Use a vacuum to remove dust and debris from the filter and all ventilation panels. **DO NOT** use water or a hose to remove dust or debris
4. Re-insert filter
5. Re-install the ventilation panel

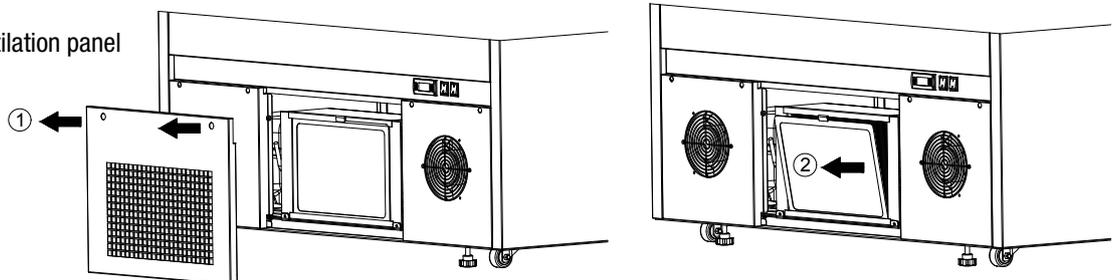

5.1.11 Condenser

Periodic cleaning of the condenser can extend the life of the unit.

This must be done by a qualified service technician. Contact the Stoddart Service Department

5.2 Troubleshooting

5.2.1 Troubleshooting Procedures

- If any faults/issues occur with the unit, follow the below troubleshooting procedures
- If the troubleshooting procedures do not correct the problem, contact the Stoddart Service Department

	WARNING
	Technician tasks are only to be completed by qualified service people. Check faults before calling service technician.

Problem	Possible Causes	Possible Corrective Action
Unit does not operate/start	The mains isolating switch on the wall, circuit breaker or fuses are OFF at the power board	Turn isolating switch, circuit breaker or fuses ON
	Power switch is in the "OFF" position	Change the power switch to the "ON" position
	Power point is faulty	Contact Stoddart Service Department (Technician Task)
	Refrigeration circuit board(s) is hot	Contact Stoddart Service Department (Technician Task)
Unit is too warm	Ambient air entering the units	Move away from air flow
	Exhaust fan above the unit	Move unit / exhaust fan
	Warm items in unit	Remove items Pre-chill
	Air not circulating	Remove some items Clear air vents / grills
	Too many items in the unit (overloaded)	Remove some items
	Evaporator coil fins blocked	Clean fins Defrost unit
	Evaporator coil iced up	Defrost Unit Remove warm items Fix or replace door seals
	Temperature probe broken / disabled	Contact Stoddart Service Department (Technician Task)
	Faulty electronic controller	Contact Stoddart Service Department (Technician Task)
Direct sunlight	Block sunlight (window tinting and/or shades)	
Unit is too cold	Temperature probe broken / disabled	Contact Stoddart Service Department (Technician Task)
	Faulty electronic controller	Contact Stoddart Service Department (Technician Task)

5.3 Disposal

If the appliance is no longer of use, please dispose in an environmentally correct way.

Contact a qualified service technician:

- To recover all refrigerant
- To remove the compressor or remove the oil from the compressor

The distributor / retailer can contact their local metal recycling centre to collect the remaining cabinet, shelves, etc.

There may be special requirements or conditions. Information on the disposal of refrigeration appliances can be obtained from:

- Your supplier
- Government authorities



Discarded electric appliances are recyclable and should not be discarded in the domestic waste! Please actively support us in conserving resources and protecting the environment by returning this appliance to the collection centres (if available).



Dispose of packaging in accordance to applicable legal regulations.

Australia

Australian Business Number: 16009690251

Service / Spare Parts

<https://customerservice.stoddart.com.au>

Sales

Tel: 1300 79 1954

Email: sales@stoddart.com.au

Web: www.stoddart.com.au



Customer
Service Portal

New Zealand

New Zealand Business Number: 6837694

Service / Spare Parts

<https://customerservice.stoddart.com.au>

Sales

Tel: 0800 79 1954

Email: sales@stoddart.co.nz

Web: www.stoddart.co.nz



Customer
Service Portal