


Product Information

- Unique and versatile, heavy duty holding and transport carts are designed to electrically and/or passively hold hot food and/or cold food simultaneously in one cart.
- Tough, durable polyethylene exterior stays cool to the touch and will never dent, crack, chip or rust.
- Thick CFC-free polyurethane insulation throughout the cart ensures food is held at safe temperatures up to 4 hours in passive units.
- Active hot or cold modules are also sold separately and can be quickly changed out to adapt to menu changes or operational needs.
- Heavy-duty, gasket-free, self venting doors open 270° to the side, flush to the cart. Doors have a magnetic quick close feature and two durable nylon latches. Door and body come with heavy-duty, high-gauge reinforced hinge hardware.
- Solar digital door thermometer provides internal compartment temperature at-a-glance.
- Moulded-in rails hold GN food pans with front load configuration (PCU1000) and side load configuration (PCU2000).
- Two ergonomic vertical moulded-in rear handles run the entire height of the cart.
- PCU1000 comes standard with all nylon, maintenance free 150mm castors, 2 front swivel with brake, 2 rigid in back.
- PCU2000 comes standard with heavy duty, hi-modulus rubber 150mm castors, 2 front swivel with brake, 2 rigid in back. Lock pin on front castors can be used to convert swivel to rigid.
- Heating module features a touch screen control with adjustable temperature setting from 21°C - 85°C
- Cooling module features simple input control with an adjustable setting from 0°C - 5°C
- Both heating and cooling modules feature actual temperature reading, temperature set-point and can easily be switched from °F to °C
- **12 months parts and labour warranty**




Specifications

Model	W x D x H (mm)	Weight	Total Connected Load	Electrical Connection	Shipping W x D x H (mm)
PCU1000HH6615	556 x 864 x 1501	65kg	0.51kW (Top) / 0.51kW (Bottom)	10A, 240V plug & lead x 2	686 x 934 x 1750 / 77kg
PCU1000HC6615	556 x 864 x 1501	69kg	0.51kW (Top) / 0.39kW (Bottom)	10A, 240V plug & lead x 2	686 x 934 x 1750 / 81kg
PCU1000CC6615	556 x 864 x 1501	73kg	0.39kW (Top) / 0.39kW (Bottom)	10A, 240V plug & lead x 2	686 x 934 x 1750 / 85kg
PCU2000HH6615	762 x 965 x 1727	86kg	0.51kW (Top) / 0.51kW (Bottom)	10A, 240V plug & lead x 2	828 x 1000 x 1750 / 99kg
PCU2000HC6615	762 x 965 x 1727	90kg	0.51kW (Top) / 0.39kW (Bottom)	10A, 240V plug & lead x 2	828 x 1000 x 1750 / 103kg
PCU2000CC6615	762 x 965 x 1727	94kg	0.39kW (Top) / 0.39kW (Bottom)	10A, 240V plug & lead x 2	828 x 1000 x 1750 / 106kg

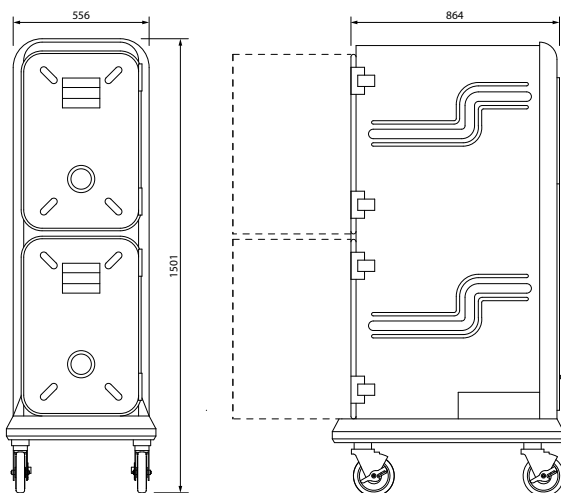

PCU1000xx6615

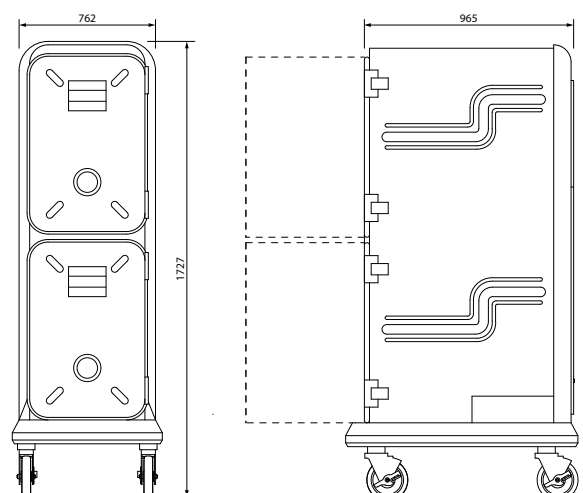

PCU2000xx6615