

CAMBRO®





Product Information

- Use in walk-in coolers, freezers, dry storage, warewashing areas, loading docks or front of house. Withstands storage temperatures -38° to 88°C. Impervious to moisture, chemicals, salt, food acids and humidity
- Posts and traverses are made of a revolutionary, extremely strong composite material with a smooth, easy to clean surface. Traverse dovetails are separate from the posts and attach easily to secure the shelf traverses
- Removable polypropylene shelf plates have permanent, moulded-in Camguard®, an antimicrobial technology that inhibits the growth of mould, fungus and bacteria
- Shelving Units interconnect in straight lines with shared posts. Uniquely engineered Post Connectors offer exceptional cross stabilisation. Weight bearing is uncompromised and space is maximised. Possible configuration in "L", "U", "T" or "Cross" layouts using corner connectors (supplied separately)
- Posts, traverses and shelf plates wipe clean or can be run through a dishwasher
- Shelf traverses can be removed and adjusted at 102mm (4") increments
- Sturdy reinforced nylon foot adjusts easily to level units
- Requires some assembly with minimal parts. Use a rubber mallet only
- Maximum total weight capacity (evenly distributed) - 1088kg, with an individual shelf limit of 363kg
- **12 months parts and labour warranty**

Kit Includes

- 2 x Assembled post kits
- 8 x Traverses
- Traverse Dovetails
- Shelf Plates



Specifications

Model	Unit "	Width A*	Depth B*	Height C*	Weight Kg
EXU183672V4480	18" x 36"	914	457	1828	22
EXU184272V4480	18" x 42"	1066	457	1828	24
EXU184872V4480	18" x 48"	1219	457	1828	26
EXU185472V4480	18" x 54"	1372	457	1828	28
EXU186072V4480	18" x 60"	1524	457	1828	30
EXU187272V4480	18" x 72"	1828	457	1828	33
EXU243672V4480	24" x 36"	914	610	1828	25
EXU244272V4480	24" x 42"	1066	610	1828	28
EXU244872V4480	24" x 48"	1219	610	1828	31
EXU245472V4480	24" x 54"	1372	610	1828	34
EXU246072V4480	24" x 60"	1524	610	1828	36
EXU247272V4480	24" x 72"	1828	610	1828	40

Accessoires

- EXCC4480** Connector - Corner 4 Sets for 4 shelves
- EXPK1872480** Post Kit - 18" x 72" Includes 2 x Posts, 1 x top & bottom post connector
- EXPK2472480** Post Kit - 24" x 72" Includes 2 x Posts, 1 x top & bottom post connector
- CSCWB000** Mobile Caster with Brake
- CSDS18H6480** Dunnage Stand - 18" x 6"
- CSDS24H6480** Dunnage Stand - 24" x 6"

Cambro dunnage stand increases the weight-bearing capacity of bottom shelf to 453kg

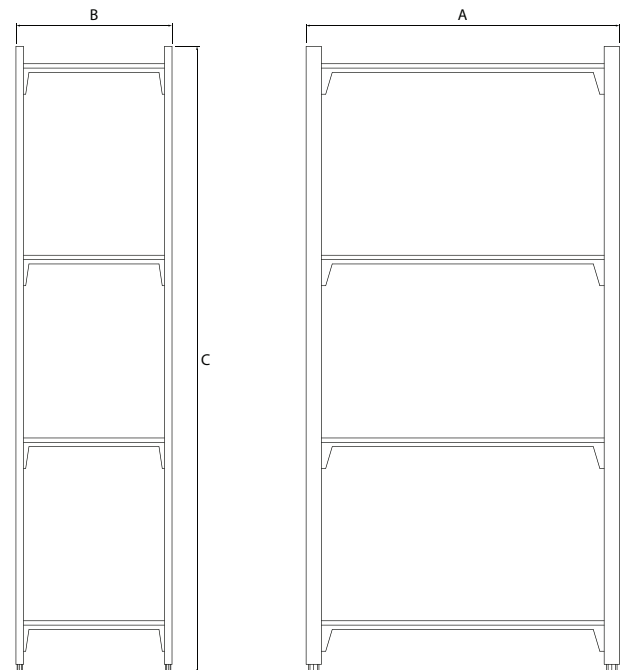

Product Information

- Use in walk-in coolers, freezers, dry storage, warewashing areas, loading docks or front of house. Withstands storage temperatures -38° to 88°C. Impervious to moisture, chemicals, salt, food acids and humidity
- Posts and traverses are made of a revolutionary, extremely strong composite material with a smooth, easy to clean surface. Traverse dovetails are separate from the posts and attach easily to secure the shelf traverses
- Removable polypropylene shelf plates have permanent, moulded-in Camguard®, an antimicrobial technology that inhibits the growth of mould, fungus and bacteria
- Shelving Units interconnect in straight lines with shared posts. Uniquely engineered Post Connectors offer exceptional cross stabilisation. Weight bearing is uncompromised and space is maximised. Possible configuration in "L", "U", "T" or "Cross" layouts using corner connectors (supplied separately)
- Posts, traverses and shelf plates wipe clean or can be run through a dishwasher
- Shelf traverses can be removed and adjusted at 102mm (4") increments
- Sturdy reinforced nylon foot adjusts easily to level units
- Requires some assembly with minimal parts. Use a rubber mallet only
- Maximum total weight capacity (evenly distributed) - 1088kg, with an individual shelf limit of 363kg
- **12 months parts and labour warranty**

Kit Includes

- 1 x Assembled post kits
- 8 x Traverses
- Shelf Plates


Specifications

Model	Unit "	Width A*	Depth B*	Height C*	Weight Kg
EXA183672V4480	18" x 36"	914	457	1828	17
EXA184272V4480	18" x 42"	1066	457	1828	20
EXA184872V4480	18" x 48"	1219	457	1828	21
EXA185472V4480	18" x 54"	1372	457	1828	23
EXA186072V4480	18" x 60"	1524	457	1828	25
EXA187272V4480	18" x 72"	1828	457	1828	28
EXA243672V4480	24" x 36"	914	610	1828	21
EXA244272V4480	24" x 42"	1066	610	1828	23
EXA244872V4480	24" x 48"	1219	610	1828	26
EXA245472V4480	24" x 54"	1372	610	1828	29
EXA246072V4480	24" x 60"	1524	610	1828	32
EXA247272V4480	24" x 72"	1828	610	1828	35

Accessories

- EXCC4480** Connector - Corner 4 Sets for 4 shelves
- EXPK1872480** Post Kit - 18" x 72" Includes 2 x Posts, 1 x top & bottom post connector
- EXPK2472480** Post Kit - 24" x 72" Includes 2 x Posts, 1 x top & bottom post connector
- CSCWB000** Mobile Caster with Brake
- CSDS18H6480** Dunnage Stand - 18" x 6"
- CSDS24H6480** Dunnage Stand - 24" x 6"

Cambro dunnage stand increases the weight-bearing capacity of bottom shelf to 453kg

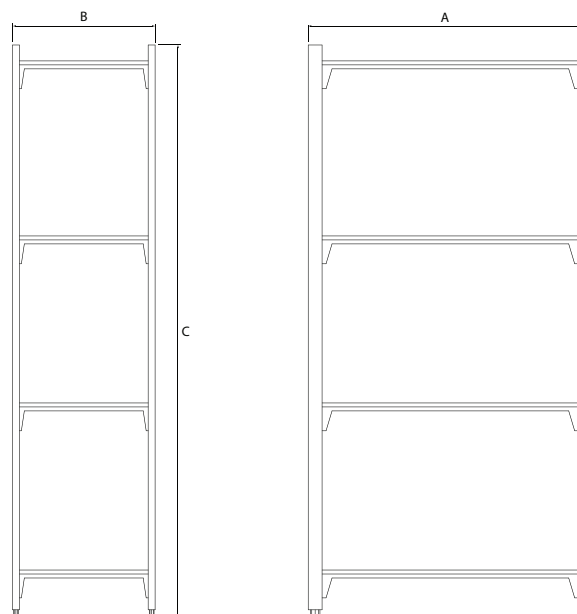

Product Information

- Add-on kit only, to suit 4 Tier Elements Series
- Use in walk-in coolers, freezers, dry storage, warewashing areas, loading docks or front of house. Withstands storage temperatures -38°C to 88°C. Impervious to moisture, chemicals, salt, food acids and humidity
- Traverses are made of a revolutionary, extremely strong composite material with a smooth, easy to clean surface. Traverse dovetails are separate from the posts and attach easily to secure the shelf traverses
- Removable polypropylene shelf plates have permanent, moulded-in Camguard®, an antimicrobial technology that inhibits the growth of mould, fungus and bacteria
- Maximum total weight capacity per shelf (evenly distributed) 363kg
- **12 months parts and labour warranty**






Kit Includes

- 2 x Shelf Traverses
- Vented Shelf Plates

Specifications

Model	Unit "	Width A*	Depth B*	Height C*	Weight Kg
EXSK1836V1480	18" x 36"	914	457	25	3
EXSK1842V1480	18" x 42"	1066	457	25	4
EXSK1848V1480	18" x 48"	1219	457	25	4
EXSK1854V1480	18" x 54"	1372	457	25	5
EXSK1860V1480	18" x 60"	1524	457	25	5
EXSK1872V1480	18" x 72"	1828	457	25	6
EXSK2436V1480	24" x 36"	914	610	25	4
EXSK2442V1480	24" x 42"	1066	610	25	5
EXSK2448V1480	24" x 48"	1219	610	25	5
EXSK2454V1480	24" x 54"	1372	610	25	6
EXSK2460V1480	24" x 60"	1524	610	25	7
EXSK2472V1480	24" x 72"	1828	610	25	8



Accessoires

- EXCC4480** Connector - Corner 4 Sets for 4 shelves
- EXPK1872480** Post Kit - 18" x 72" Includes 2 x Posts, 1 x top & bottom post connector
- EXPK2472480** Post Kit - 24" x 72" Includes 2 x Posts, 1 x top & bottom post connector
- CSCWB000** Mobile Caster with Brake
- CSDS18H6480** Dunnage Stand - 18" x 6"
- CSDS24H6480** Dunnage Stand - 24" x 6"

Cambro dunnage stand increases the weight-bearing capacity of bottom shelf to 453kg


Product Information

- Unique and versatile, heavy duty holding and transport carts are designed to electrically and/or passively hold hot food and/or cold food simultaneously in one cart.
- Tough, durable polyethylene exterior stays cool to the touch and will never dent, crack, chip or rust.
- Thick CFC-free polyurethane insulation throughout the cart ensures food is held at safe temperatures up to 4 hours in passive units.
- Active hot or cold modules are also sold separately and can be quickly changed out to adapt to menu changes or operational needs.
- Heavy-duty, gasket-free, self venting doors open 270° to the side, flush to the cart. Doors have a magnetic quick close feature and two durable nylon latches. Door and body come with heavy-duty, high-gauge reinforced hinge hardware.
- Solar digital door thermometer provides internal compartment temperature at-a-glance.
- Moulded-in rails hold GN food pans with front load configuration (PCU1000) and side load configuration (PCU2000).
- Two ergonomic vertical moulded-in rear handles run the entire height of the cart.
- PCU1000 comes standard with all nylon, maintenance free 150mm castors, 2 front swivel with brake, 2 rigid in back.
- PCU2000 comes standard with heavy duty, hi-modulus rubber 150mm castors, 2 front swivel with brake, 2 rigid in back. Lock pin on front castors can be used to convert swivel to rigid.
- Heating module features a touch screen control with adjustable temperature setting from 21°C - 85°C
- Cooling module features simple input control with an adjustable setting from 0°C - 5°C
- Both heating and cooling modules feature actual temperature reading, temperature set-point and can easily be switched from °F to °C
- **12 months parts and labour warranty**




Specifications

Model	W x D x H (mm)	Weight	Total Connected Load	Electrical Connection	Shipping W x D x H (mm)
PCU1000HH6615	556 x 864 x 1501	65kg	0.51kW (Top) / 0.51kW (Bottom)	10A, 240V plug & lead x 2	686 x 934 x 1750 / 77kg
PCU1000HC6615	556 x 864 x 1501	69kg	0.51kW (Top) / 0.39kW (Bottom)	10A, 240V plug & lead x 2	686 x 934 x 1750 / 81kg
PCU1000CC6615	556 x 864 x 1501	73kg	0.39kW (Top) / 0.39kW (Bottom)	10A, 240V plug & lead x 2	686 x 934 x 1750 / 85kg
PCU2000HH6615	762 x 965 x 1727	86kg	0.51kW (Top) / 0.51kW (Bottom)	10A, 240V plug & lead x 2	828 x 1000 x 1750 / 99kg
PCU2000HC6615	762 x 965 x 1727	90kg	0.51kW (Top) / 0.39kW (Bottom)	10A, 240V plug & lead x 2	828 x 1000 x 1750 / 103kg
PCU2000CC6615	762 x 965 x 1727	94kg	0.39kW (Top) / 0.39kW (Bottom)	10A, 240V plug & lead x 2	828 x 1000 x 1750 / 106kg

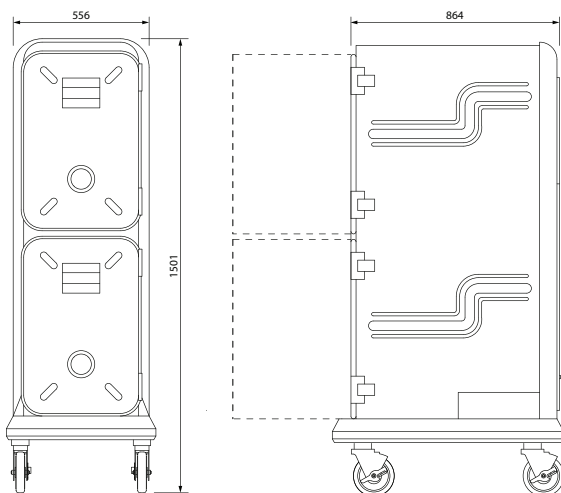

PCU1000xx6615

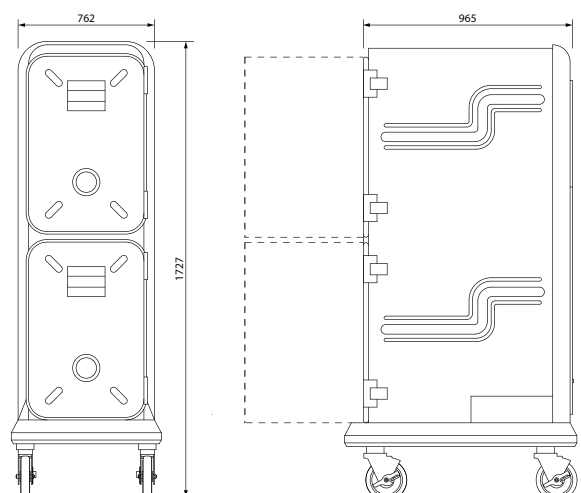

PCU2000xx6615

Product Information

- This large capacity Camcarrier easily handles storing and transporting food for any catering job, large or small, hot or cold foods. No power required.
- Tough, one-piece seamless, double-wall, polyethylene construction is easy to maintain and won't dent, crack, rust, chip or break
- Thick polyurethane foam insulated compartments and air tight gaskets help to retain food quality and temperatures without the use of external heat sources
- Durable nylon door latches are easy to open and close securely to provide maximum temperature retention. Door swings open 270° to the side for easy loading and unloading
- Pop-up vent allows steam to be released and keeps menu items from becoming soggy
- Ergonomic moulded-in handles are located on top sides to provide safe and easy lifting and transporting
- Units interlock for easy stacking and transporting
- Optional Camdolly® provides easy transport
- No assembly required.
- Store hot and cold foods in the same compartment with the use of the optional ThermoBarrier® Insulated Shelf Divider, or create a portable chiller by using the optional Camchiller®. No external power or ice required (Contact your sales representative for further information)
- **12 months parts and labour warranty**




*Dolly not included

Specifications

Model	W x D x H (mm)	Weight	Shipping W x D x H (mm)
UPC400401	460 x 650 x 630	16kg	471 x 643 x 658 / 16kg
UPC800401	520 x 690 x 1370	39kg	539 x 730 x 1397 / 45kg
UPC1600401	720 x 820 x 1370	62kg	762 x 939 x 1403 / 58kg

Accessories

CD400401 Dolly to suit: UPC400401

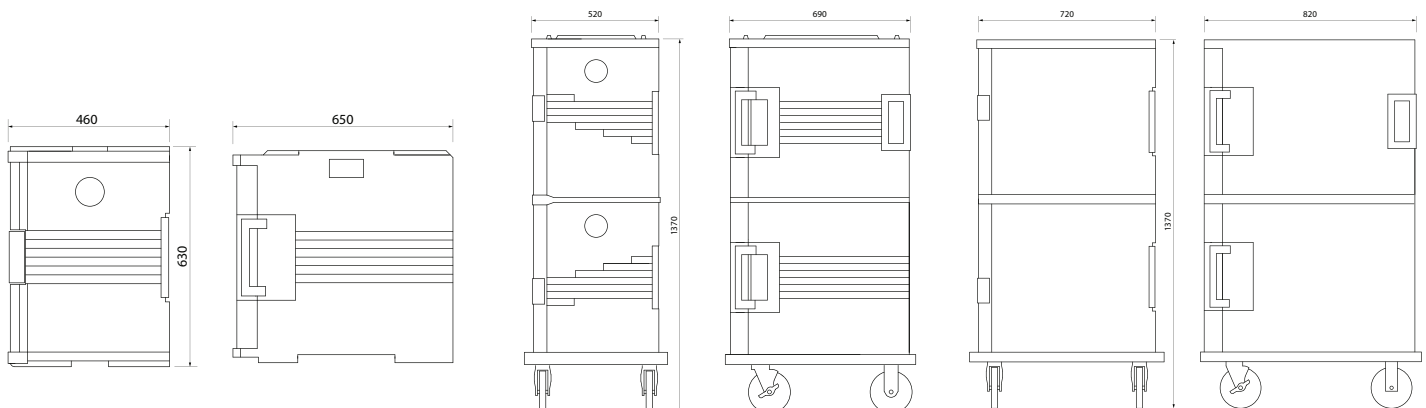

Product Information

- Ideal for small and large venues. Offers maximum storage capacity in a 760 x 760mm compact footprint. Adjustable towers provide unlimited storage options utilizing the same unit as table top dishes/sizes change.
- Adjustable towers can accommodate almost any configuration, keeping your dishware secure during transport. Each moulded polyethylene tower includes one each zinc-plated threaded rod, adjustment knob, and aluminium bottom nut. Towers are easy to remove for complete cleaning.
- Adjusts to hold plates from 117 - 330mm in diameter.
- The dish caddy includes 4 towers, additional tower kit (4pk) available: **ADCSC4480**
- Each storage column is 520mm deep for safe stacking capacity of approximately 60 plates (round only) per stack based on plate design/style.
- Safely store dishes 290mm up from the floor with 180mm clearance under the unit.
- One-piece moulded body made of heavy-duty, durable polyethylene with two each moulded-in top handles. Will not rust, crack or chip. Easy to clean.
- 227Kg load-bearing capacity.
- Four (4) each, plated casters, 2 swivel with brake and 2 rigid, with non-marking, highly durable. 30 mm polyurethane tread.
- Includes one Vinyl Cover. Use to protect clean dishes during storage and transport.
- **12 months parts and labour warranty**




Specifications

Model	W x D x H (mm)	Weight	Shipping W x D x H (mm)
ADCRC110	760 x 760 x 840	27kg	857 x 775 x 775 / 34kg

Configurations


ADCRC110 - with 4 towers

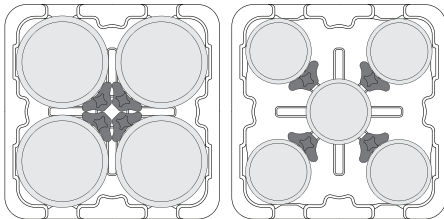

Stacks of Dishes: 4
Holds up to 240 dishes
Dish Sizes: 240 – 330mm

Stacks of Dishes: 5
Holds up to 300 dishes
Dish Sizes: 229mm


ADCRC110 - with 8 towers (1 extra tower kit required)

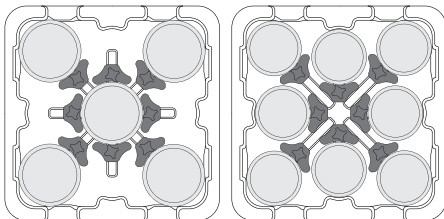

Stacks of Dishes: 5
Holds up to 300 dishes
Dish Sizes: 203 – 235mm

Stacks of Dishes: 8
Holds up to 480 dishes
Dish Sizes: 152 – 197mm



ADCRC110 - with 12 towers (2 extra tower kits required)

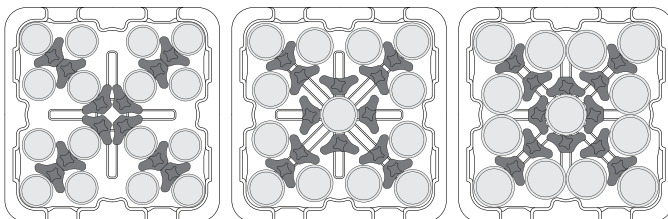

Stacks of Dishes: 16
Holds up to 960 dishes
Dish Sizes: 117mm

Stacks of Dishes: 13
Holds up to 780 dishes
Dish Sizes: 121 – 123mm

Stacks of Dishes: 13
Holds up to 780 dishes
Dish Sizes: 133 – 146mm

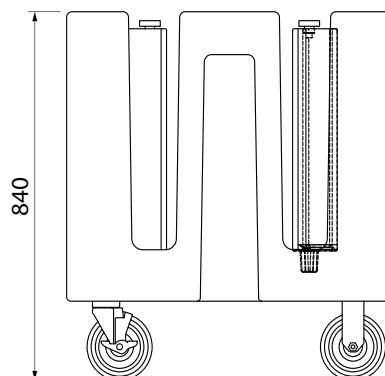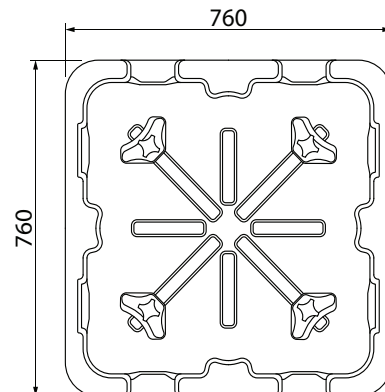



Product Information

- This robust and durable cart is built to tackle a range of transport tasks, from the receiving dock to the front of the house.
- Use to store equipment and supplies, deliver room service or tear down a banquet room. Versatile workhorse moves easily from table set up to bussing service, delivering prepared foods to food bars, coffee service, or transporting catering supplies off the delivery truck
- Ships “knocked down” to minimize shipping costs, yet easy to assemble and ready to use in minutes. Directions included with each cart. (Use plastic mallet only)
- Load capacity: 180kg (60kg per shelf)
- Three each polypropylene shelves are durable, stain resistant and easy to clean plus lightly textured to reduce sliding. Each shelf holds one full size dish rack or two standard size tote boxes.
- Raised marine rails around each shelf prevent items from slipping off.
- Generous 300mm open spacing between shelves speeds up loading and unloading.
- Aluminium uprights between shelves ensure optimum sturdiness and stability and are rust resistant.
- Two ergonomic polypropylene handles are included with each cart.
- Four non-marking, powder coated steel, 127mm swivel casters without brake are durable and strong and offer quiet, easy transportation.
- **12 months parts and labour warranty**



Specifications

Model	BC340KD110
W x D x H (mm)	540 x 1016 x 950
Weight	14kg
Shipping W x D x H (mm)	550 x 950 x 320
Shipping Weight	18kg
Maximum Load bearing Capacity	600kg
Maximum Load bearing Capacity	180kg

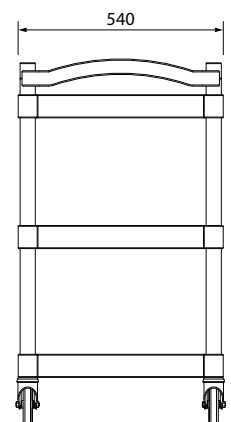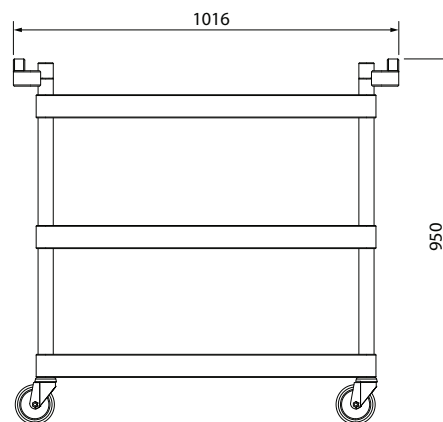


Product Information

- Standing at just 730mm high, makes this caddy ideal for fitting under standard prep tables and countertops.
- Built with double-wall, high-density polyethylene, this unit is impact-resistant and won't dent, crack, bubble, chip, or break. It's also easy to clean.
- The thick polyurethane foam insulation ensures ice stays frozen for days, reducing the need for frequent restocking and enabling quick, convenient service.
- The unique slant-top lid slides up and back into a secure position, providing easy access to the ice. Four sturdy thumbscrews keep the top tightly secured during transport and when the lid is slid back.
- Holds up to 45.5kg of ice.
- A durable nylon front latch keeps the lid in place during transport, protecting contents and ensuring optimal temperature retention. It's rust-resistant and built to last.
- NSF-listed, no-drip, recessed, threaded faucet with standard hose hookup for quick and convenient draining and cleaning.
- Includes an unbreakable polycarbonate drain shelf, allowing water to drain instantly so ice lasts longer.
- Moulded-in side grips provide controlled handling and manoeuvring, while front and back lift grips offer comfortable lifting on and off transport vehicles.
- Equipped with four 127mm casters for easy manoeuvring across various surfaces, including poolside, campus, or banquet floors. Front swivel casters include locking brakes.
- Model ICS100L: 2 fixed, 2 swivel with brakes.
- No assembly required.
- **12 months parts and labour warranty**





Specifications



Model	W x D x H (mm)	Weight
ICS100L110	550 x 770 x 730	23kg
ICS125L110	585 x 800 x 745	29kg
ICS175L110	610 x 955 x 745	33kg
ICS200TB110	585 x 865 x 1005	41kg





ICS100L110




ICS125L110



ICS175L110



ICS200TB110




Product Information

- Multi-purpose, end load trolley for holding, storing and transporting bulk food in GN pans. Compact, slim design maximises working space and storage space
- Made from an extremely strong, revolutionary composite material with a smooth, easy to clean surface
- No metal parts, welds, screws, cross bars or metal casters than can break, bend, dent, rust or corrode
- Moves easily between kitchen, freezer, cooler and/or off premise
- Rails accept/hold hot pans from ovens up to 200°C
- No marking or metal wipe from metal pans. Wide 76mm rail spacing offers greatest versatility and ease of use
- Top frame features molded in supports to hold a single 1/1 GN Pan to cover and protect contents below
- Moulded in lip load rails (food pan flange hangs from rails) for GN pans, with moulded-in 3mm pan stops on each rail end help to keep pans on the rails when turning during light transport
- Four each heavy duty, 127mm premium plastic swivel casters all with total locking brake. Non-marking thermoplastic rubber wheel. Rust and corrosion free
- Flat packed with casters and bottom frame wedges factory installed, for minimal assembly
- Components are easy to remove and replace if damaged, ensuring a lifetime of service
- **12 months parts and labour warranty**



Specifications

Model	UGNPR11F18480	UGNPR21F36480
W x D x H (mm)	438 x 730 x 1707	645 x 752 x 1707
Weight	25kg	28kg
Shipping W x D x H (mm)	1905 x 521 x 178	1905 x 794 x 203
Shipping Weight	27kg	30kg
GN Pan Holding Capacity	18 1/1 GN Pans (65mm)	36 1/1 GN Pans (65mm)
Load bearing Capacity - Per Rail Set	45kg	45kg
Maximum Load bearing Capacity	340kg (evenly distributed)	340kg (evenly distributed)

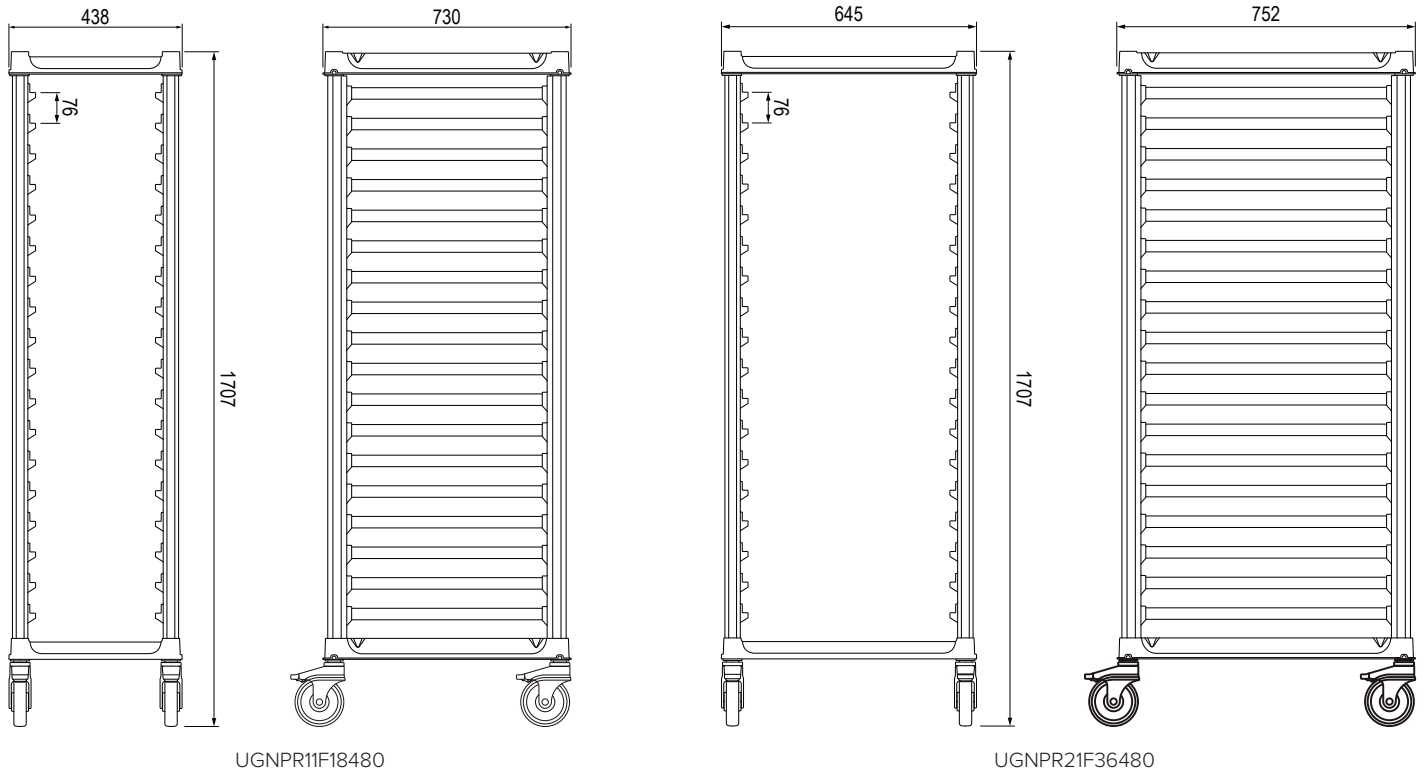

UGNPR11F18480

UGNPR21F36480


Product Information

- Multi-purpose, end load trolley for holding, storing and transporting bulk food in 6040 Sheet Pans (600 x 400mm). Compact, slim design maximises working space and storage space
- Made from an extremely strong, revolutionary composite material with a smooth, easy to clean surface
- No metal parts, welds, screws, cross bars or metal casters than can break, bend, dent, rust or corrode
- Moves easily between kitchen, freezer, cooler and/or off premise
- Rails accept/hold hot pans from 200°C oven.
- No marking or metal wipe from metal pans. Wide 76mm rail spacing offers greatest versatility and ease of use
- Top frame features moulded in supports to hold a single 6040 Sheet Pan to cover and protect contents below
- Moulded in slide rails for sheet pans (sheet pan sits on top of the rail), with moulded-in 3mm pan stops on each rail end help to keep pans on the rails when turning during light transport
- Four each heavy duty, 127mm premium plastic swivel casters all with total locking brake. Non-marking thermoplastic rubber wheel. Rust and corrosion free
- Flat packed with casters and bottom frame wedges factory installed, for minimal assembly
- Components are easy to remove and replace if damaged, ensuring a lifetime of service
- **12 months parts and labour warranty**



Specifications

Model	UPR6040F18480
W x D x H (mm)	516 x 783 x 1708
Weight	21kg
Shipping W x D x H (mm)	1785 x 757 x 190
Shipping Weight	25kg
6040 Pan Holding Capacity	18 Sheet Pans
Load bearing Capacity - Per Rail Set	18kg
Maximum Load bearing Capacity	240kg (evenly distributed)

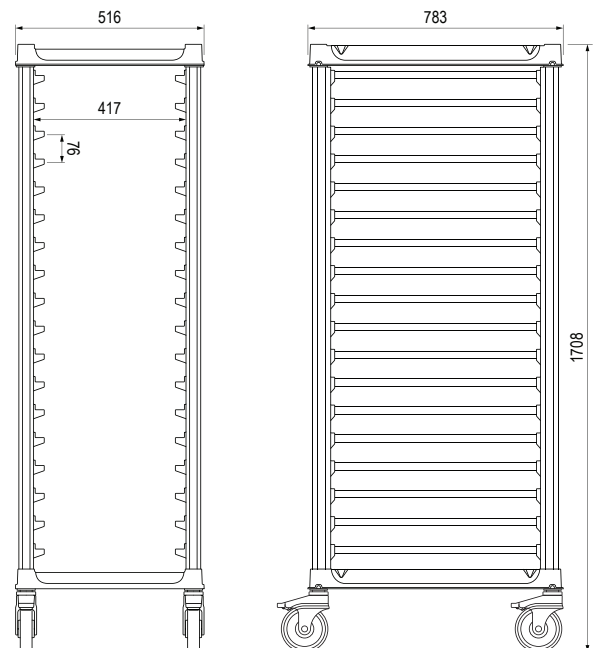

Product Information

- Ideal for storing and transporting a wide range of dry ingredients like flour, sugar, rice, and grains. Perfect for use in restaurants, food production facilities, or commissaries.
- Volume - 102 Litres
- One-piece, seamless single-wall polyethylene bin construction is extremely durable. Won't rust or corrode. Liquids and dry foods will not stick or seep between seams.
- FDA accepted material. Meets all food contact requirements and eliminates need for liners.
- Smooth interior and exterior are easy to clean.
- Injection moulded Camwear® polycarbonate lids are transparent, break resistant and offer quick and easy identification of contents. Slide-back feature means easy access.
- Working height permits storage under standard work benches.
- Heavy-duty 76mm casters, 2 front swivel, 2 fixed rear.
- Shipped fully assembled and ready to use.
- **12 months parts and labour warranty**



Specifications


Model	IBS27148
W x D x H (mm)	420 x 750 x 710
Weight	14kg
Shipping W x D x H (mm)	422 x 715 x 759
Shipping Weight	15kg

Load Capacity


Sugar	103kg
Flour	68kg

Accessories

IBS27-60270	Replacement Lid - Back
IBS27-60271	Replacement Lid - Front

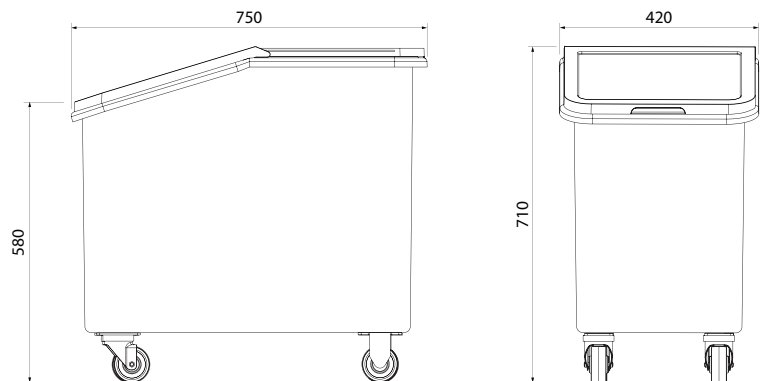

If you require a product not listed in this product guide, please contact your local Stoddart Representative.

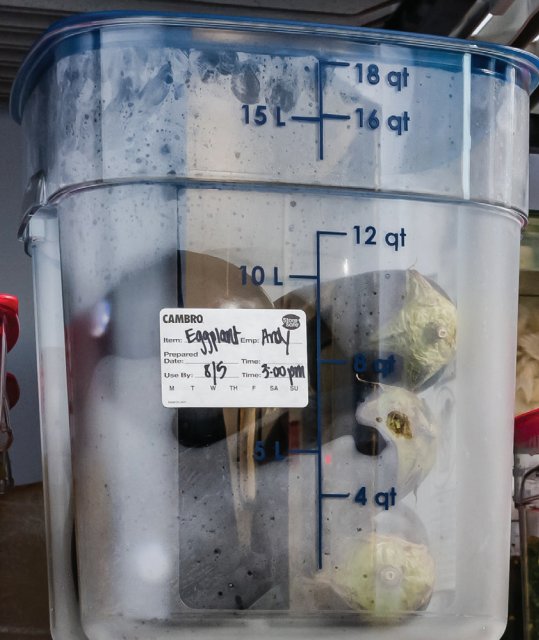



Brisbane

Sydney

Melbourne

Perth

Adelaide

1300 79 1954
www.stoddart.com.au

Auckland

0800 79 1954
www.stoddart.co.nz

Manufactured or Imported
& distributed exclusively by:

