

**Product Information:**

- Dispensing tubes suit 210-290mm plates, 270-305mm plates and 300-335mm plates
- Designed to be installed into a cut out in a new or existing bench top allowing for simple, inexpensive installation
- Adjustable models with plate guides available to take various size plates (CMGE.2947, CMGE.0947)
- Multi-spring mechanism gives easy adjustment for different plate weights
- 12-month parts and labour warranty
- Open configuration
- Heating element located in base, controlled by remote (up to 1500mm) thermostat, adjustable. Thermostat and isolating switch mounted to special panel
- Includes full stainless steel shroud
- 12-month parts and labour warranty




Ambient




Heated

Specifications:

Model	CMGE.0574	CMGE.0575	CMGE.0576	CMGE.0577	CMGE.3093	CMGE.2947	CMGE.0947
D x H (mm)	400 x 740	400 x 760	430 x 740	430 x 760	330 x 740	430 x 760	382 x 760
Cutout Diameter (mm)	Ø388	Ø388	Ø418	Ø418	Ø312	Ø418	Ø370
Plate Diameter (mm)	Ø270 - 305	Ø270 - 305	Ø300 - 335	Ø300 - 335	Ø200 - 230	Ø216 - 320	Ø210 - 290
Temperature Range	---	30°C - 120°C	---	30°C - 120°C	---	---	30°C - 120°C
Total Connected Load	---	0.4kW	---	0.4kW	---	---	0.4kW
Electrical Connection	---	240V 10A (plug & lead)	---	240V 10A (plug & lead)	---	---	240V 10A (plug & lead)

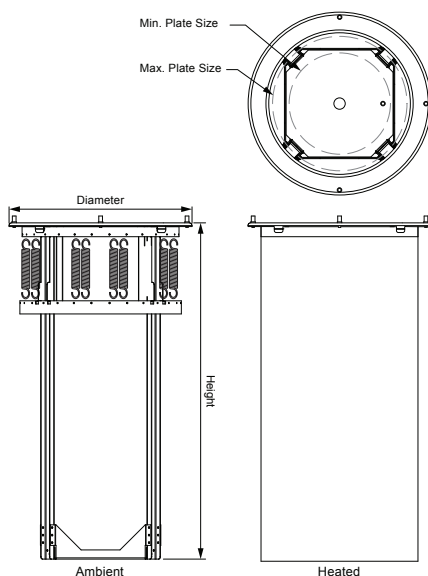

CMGE.0574 / CMGE.0575
CMGE.0576 / CMGE.0577 / CMGE.3093

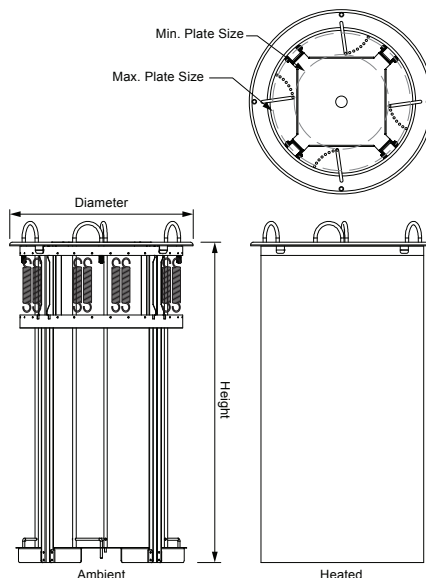

CMGE.2947 / CMGE.0947

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: E - 20/11/2024 - 01

www.stoddart.com.au

www.stoddart.co.nz

