

## Chilled Drink Trough S7 - with Chilled Water to Splashback Mounted Bubbler Taps

### Model: SPPL.DT.S7.CHILLx.y


SPPL = Stoddart Plumbing Product  
 DT = Drinking Trough  
 S7 = S7 Style  
 CHILLx = CHILL3 = 3 chilled drink taps  
 = CHILL4 = 4 chilled drink taps  
 y = L = Left Hand Waste  
 = R = Right Hand Waste

eg.: for specification and ordering quote



Code: SPPL.DT.S7.CHILL4.R

### Features and Benefits:

- Designed for schools and sports clubs
- Concealed plumbing and fixings for vandal resistance
- Powerful Australian water chiller provides continuous supply of cool refreshing water to the drink taps (approx. 20L/hr)
- Chiller has a 2M lead with 10A, 3 pin plug
- Taps are vandal resistant, heavy duty with a chrome finish
- Standard taps have push buttons. Specify lever actuators for users with limited access
- Bubblers are fitted with safe mouth guards to protect teeth from damage
- Environmentally conscious timed flow push action tapware saves water
- Water height control valve allows water trajectory to be adjusted
- All tapware are WELS and Watermark approved
- Single point water connection

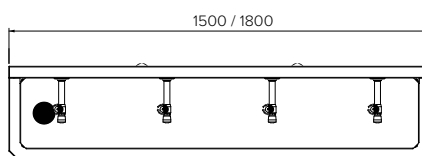

Plan View

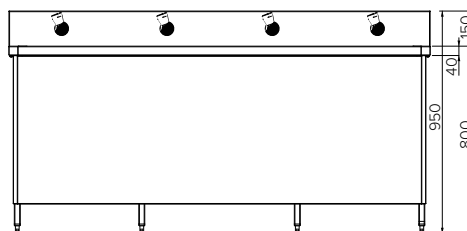

### Specifications:

**Construction:** 1.2mm, 304 grade stainless steel construction, no.4 satin finish. Single point water connection.

**Water Connection:** 1/2" BSP water connection required with capacity to supply up to 18 litres per minute

**Waste Connection:** 50mm, PVC waste supplied, trap is not included

**Unit Fixing:** Free standing frame has braced legs & adjustable feet. Chiller is installed on supplied frame. Shroud is fitted & secured with Torx screws.

**Chiller:** 240VAC, 50Hz, 370W, (3A Max Draw). ARI1010-94 Standard Performance is; 27° In to 10° Out with 32° Ambient. Factory preset thermostat @ 10°.

### Tapware Options:



Model No.	L x D x H (mm)	No. of Bubblers	Cooling Capacity
SPPL.DT.S7.CHILL3.L	1500 x 400 x 950	3	Output flow of 2 cups/minute below 15°C can be obtained from 25°C input supply water
SPPL.DT.S7.CHILL3.R	1500 x 400 x 950	3	
SPPL.DT.S7.CHILL4.L	1800 x 400 x 950	4	
SPPL.DT.S7.CHILL4.R	1800 x 400 x 950	4	



Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 03/04/2025 - 03

[www.stoddart.com.au](http://www.stoddart.com.au)

[www.stoddart.co.nz](http://www.stoddart.co.nz)