

Product Information


- Monoblock refrigeration system, for improved performance and ease of servicing
- Adjustable digital temperature controller (16°C - -20°C)
- Vertically integrated ducted cooling throughout the entire refrigerator
- Protective coating on refrigeration coil to help prevent corrosion
- Environmentally friendly R290 Hydrocarbon refrigerant
- Efficient LED lighting for increased product visibility
- Five adjustable 2/1GN shelves supplied per door to maximise storage capacity
- 80mm CFC free polyurethane insulation
- Efficient and hygienic cleaning made easy with an innovative internal design
- High quality components including highly efficient compressors and EC fans
- Self-closing, lockable doors
- Removable filter for easy cleaning
- Equipped standard with lockable castors designed for heavy-duty use
- 2 door model available, with glass or solid doors

Designed & Engineered in Australia to meet Australian Standards
24 Months on-site parts and labour warranty



Specifications

Model	AXF.URGN.2
W x D x H (mm)	1400 x 850 x 1990
Weight	223kg
Packed Dimensions (mm)	1825 x 880 x 2040
Packed Weight	232kg
Net Capacity	814 Litres
Operation	16°C - -20°C
Refrigerant	R290
Climate Class	4M1
Energy Consumption	10.57kWh/24hr
Max Ambient	40°C
Total Connected Load	1.18kW
Electrical Connection	1Ø+N+E 230VAC / 50Hz 10A plug & lead

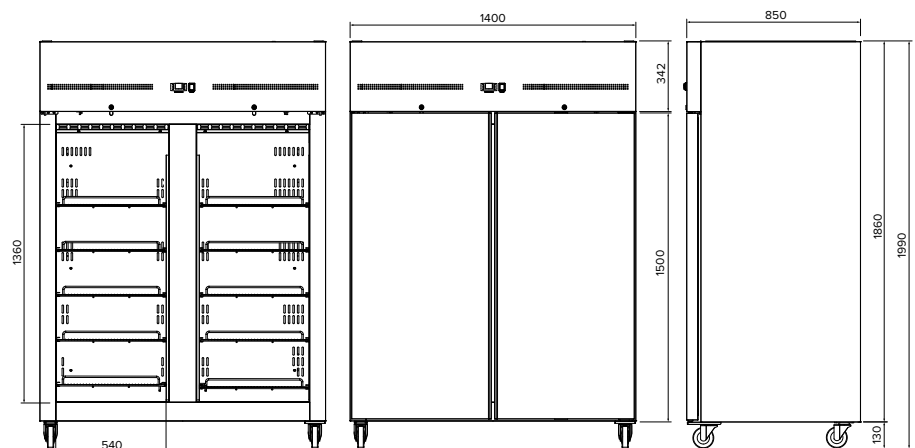

Accessories

Shelf Kit - 2/1GN shelf with runners	AXR.URGN.SHELFKIT
Tray runners to suit 600x400 trays	AXR.URGN.SHELFKIT.BAKERY