


Features

- Manufactured using Lead Safe™ DZR Brass with less than 0.25% lead content
- Shower control valve taps are designed to operate at full mains pressure
- The valve has a unique hands free self-closing operation
- Water saving and vandal resistant
- Low maintenance and easy to operate
- High quality chrome finish for easy cleaning and hygiene maintenance

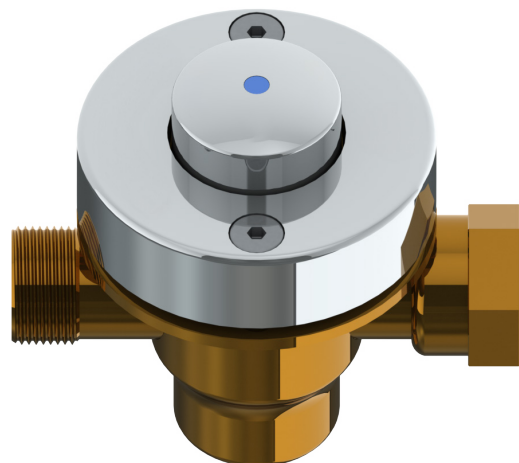

Technical Information

• WaterMark	AS 3718 Lic. WMKA0034
• Nominal Flow Rate (LPM)	5
• Inlet	1/2" BSP - Female
• Outlet	1/2" BSP - Male
• Headwork	Time Flow Cartridge
• Working Pressure Range (kPa)	100 Min - 500 Max
• Working Temperature Range (°C)	5 Min - 65 Max
• Construction	Lead Safe™ DZR Brass
• Finish	Chrome

