


Product Information

- High efficiency cooktops with heavy duty electronic components and thick, high-impact Schott Ceran glass-ceramic top, engineered for use in commercial kitchens
 - Easy control via the Helios Standard interface
 - Temperature range from 29°C - 218°C
 - Automatic pan detection for instant energy transmission to the pan & almost no energy consumption when the pan is not present
 - Microprocessor monitors vital components to check for overheating and power supply issues
 - Automatic shut-off feature prohibits overheating
 - Drop-in units feature Stainless steel edging, aluminium housing and control box
 - Integral grease filter and air baffle to ensure cleaner and cooler air intake for optimum reliability
- **24-month parts and 12-months labour warranty**

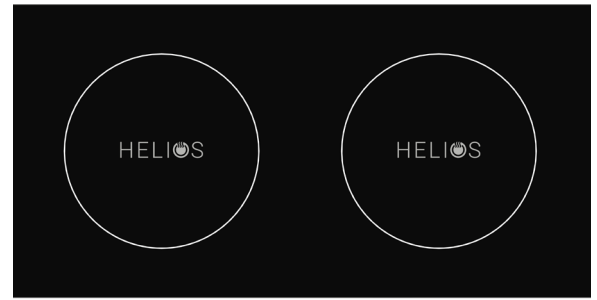

Specifications

	HRD.9500.SS25.4	HRD.9500.SS35.4
Model	HRD.9500.SS25.4	HRD.9500.SS35.4
W x D x H (mm)	692 x 343 x 95	692 x 343 x 95
Weight	14kg	14kg
Total Connected Load	4.8kW	7kW
Electrical Connection	1Ø + N + E 240VAC / 50Hz 20A plug & lead (1.8m)	1Ø + N + E 240VAC / 50Hz Lead only (1.8m) 32A plug required
Cut Out Size (mm)	683w x 334d	683w x 334d
Shipping	813 x 584 x 279 / 19kg	813 x 584 x 279 / 19kg

Legend

A Electrical Connection

