




Features

- Space saving design - suitable for slimline troughs and bottle filling stations
- Vandal resistant design: Push button designed to be removed using a hand tool only
- Valve has been designed for the rigours of daily use
- Robust design - chrome plated brass body
- Push button activation & Self-closing mechanism
- 5 lpm laminar flow



Technical Information

• WaterMark	AS 3718 Lic. WMKA 1583
• Inlet	15mm 1/2" BSP
• Working Pressure Range (kPa)	50 - 500 kPa
• Operating Temperature Range	0-50°C
• Recommended Temperature Range	5-30°C
• Flow Rate	5L/min

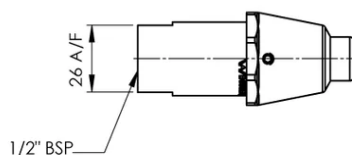

Revision: A - 26/09/2025 - 01

Due to continuous product research and development,
the information contained herein is subject to change without notice.