

Product Information

- High performance XL hood-type dishwasher
- **Electronic Pro Interface** - advanced functionality
- **PRS System**: break tank, 316 atmospheric boiler, rinse booster pump
- **HD System**: for maximum uninterrupted performance
- Double skin insulated hood
- Increased capacity with 600x500mm baskets (500 x 500mm compatible)
- XL Filters robust with additional upper tank scrap filter
- Larger HP vertical self-draining wash pump
- Larger HI FLOW stainless steel wash and rinse arms
- Larger elements in wash tank and boiler
- Four wash cycles 90/120/180 seconds, and 9 minute deep clean
- Green standby function that reduces energy consumption when idle
- Low water consumption of 2.5 litres per cycle, minimising water, energy and detergent use
- Pressed wash tank with rounded corners, for increased hygiene
- Manual lift with fully enclosed rear, 3 spring support
- Automatic drain pump with self-cleaning function
- Built in thermostop, ensures correct rinse temperatures
- Built in detergent and rinse-aid injection
- **24-months parts and labour warranty**



Included Accessories

- 1 x glass rack 500 x 600mm
- 2 x plate rack 500 x 600mm
- 2 x cutlery basket
- 1 x water inlet hose (length 1.5m)
- 1 x drain hose (length 2m)
- Fitted with 150mm adjustable legs

Optional Accessories

- Twin hood system
- Remote interface
- Inlet and outlet benches
- Additional baskets

Specifications

Model AH60.42EPI.PRS

W x D x H (mm) 681 x 793 x 2016*

Note: Dimensions do not include handle. Hood open

Weight 141kg

Packed Dimensions (mm) 770 x 930 x 1720

Packed Weight 160kg

Total Connected Load 14.8kW / 415VAC, 25A circuit
L1 = 21A / L2 = 21A / L3 = 21A

- Convertible to: 10.3kW / 415VAC, 15A circuit
(Low Power Option) L1 = 15A / L2 = 15A / L3 = 15A

Note: Unit can be converted to low power option on site by a qualified electrician. This may affect the output of the unit.

Electrical Connection 3Ø+N+E 415VAC / 50Hz
(Lead fitted, on-site connection)

Water Quantity Per Cycle 2.5 Litres

Water Connection 1.5m Hose / 3/4" BSP


Water Inlet Pressure 100 - 500KPA

Tempered water supply 10°C - 60°C

Waste Connection 2m Hose / ø20.5mm

Legend

A	Electrical Connection	D	Detergent Line
B	Water Connection	E	Rinse-Aid Line
C	Drain Connection		

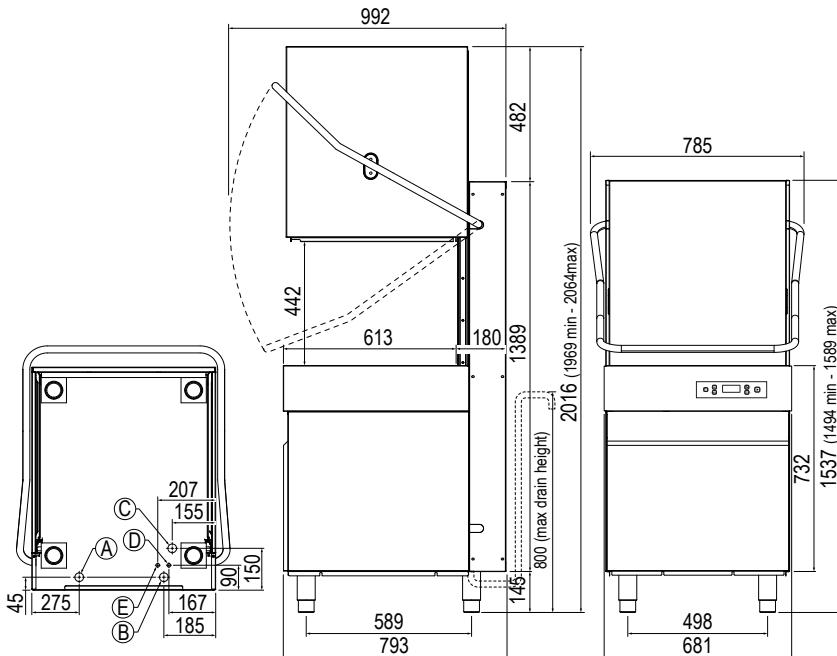

www.stoddart.com.au

www.stoddart.co.nz

Revision: A - 12/02/2026 - 02

Due to continuous product research and development,
the information contained herein is subject to change without notice.