

Product Information

- High performance hood-type dishwasher with pre-fitted, easy to install energy savings device (ESD)
- **Electronic Smart Interface** - with LED display and multicoloured start button
- **PRS System**: break tank, 316 atmospheric boiler, rinse booster pump
- **HD System**: for maximum uninterrupted performance
- **ES System**: energy savings device (ESD)
- Double skin insulated hood
- Four wash cycles 90/120/180 seconds, and 9 minute deep clean
- Green standby function that reduces energy consumption when idle
- Low water consumption of 2.5 litres per cycle, minimising water, energy and detergent use
- Pressed wash tank with rounded corners, for increased hygiene
- Stainless steel wash and rinse arms
- Robust upper tank scrap filters in stainless steel
- Manual lift with fully enclosed rear, 3 spring support
- Automatic drain pump with self-cleaning function
- Vertical self-draining wash pump
- Built in thermostop, ensures correct rinse temperatures
- Built in detergent and rinse-aid injection
- **24-months parts and labour warranty**

Included Accessories

- 1 x flat cup basket 500 x 500mm
- 2 x peg plate basket 500 x 500mm
- 2 x cutlery insert's
- 1 x water inlet hose, length 1.5m
- 1 x drain hose, length 2.0m
- Fitted with 150mm adjustable legs

Optional Accessories

- Twin hood system
- Remote interface
- Inlet and outlet benches
- Additional baskets



Specifications

Model AH800ESI.ES

W x D x H (mm) 657 x 793 x 2294

Note: Dimensions do not include handle. Hood open

Weight 163kg

Packed Dimensions (mm) 770 x 930 x 1870

Packed Weight 182kg

Total Connected Load 9.55kW / 415VAC, 25A circuit
L1 = 12A / L2 = 9A / L3 = 20A

- Convertible to:
(Low Power Option) 6.75kW / 415VAC, 15A circuit
L1 = 12A / L2 = 9A / L3 = 11A

Note: Unit can be converted to low power option on site by a qualified electrician. This may affect the output of the unit.

Electrical Connection 3Ø+N+E 415VAC / 50Hz
(Lead fitted, on-site connection)


Water Quantity Per Cycle 2.5 Litres

Water Connection 1.5m Hose / 3/4" BSP

Water Inlet Pressure 100 - 500KPA

Tempered water supply 10°C - 25°C

Waste Connection 2m Hose / ø20.5mm

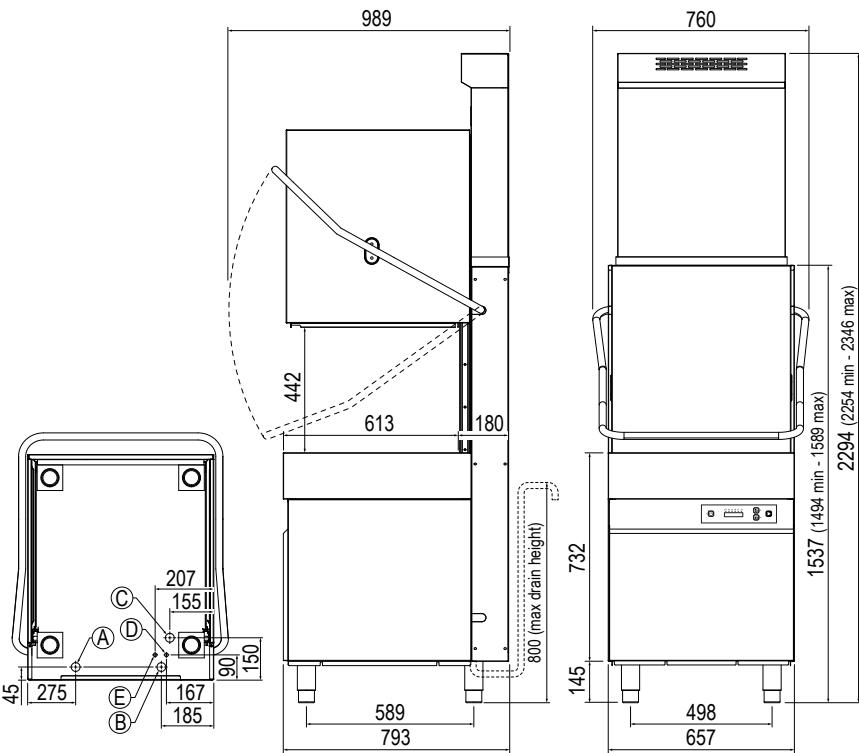

Legend

A	Electrical Connection	D	Detergent Line
B	Water Connection	E	Rinse-Aid Line
C	Drain Connection		



www.stoddart.com.au

www.stoddart.co.nz

Revision: A - 12/02/2026 - 02

Due to continuous product research and development,
the information contained herein is subject to change without notice.