
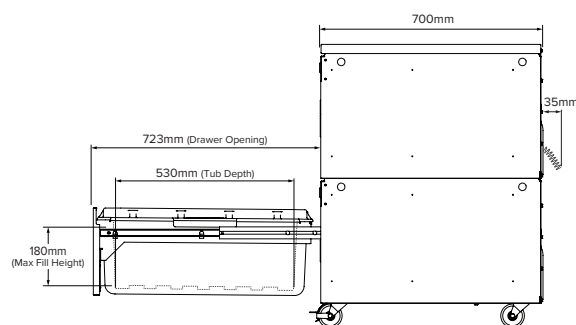


Product Information

- Modular refrigerated drawer system, providing bulk storage in a range of different configurations for extreme versatility (can be configured as a worktop or undercounter system)
- Energy efficient, insulated containers adopt 'hold the cold' technology when drawer is opened
- Low velocity cooling ensures stable temperatures and exceptional humidity control, prolonging shelf life by preventing food dehydration
- Precise temperature control in 1°C increments with adjustable digital temperature controller (15°C - -22°C)
- Designed to operate in ambient temperatures up to 40°C
- External drawer runners for hygiene and ease of cleaning. Each drawer is supplied with a divider and features keyed alike locks for added security.
- Drawer load capacity maximum 40kg (per drawer)
- Low maintenance internal condenser
- Adjustable levelling castors, rollers and legs to ensure optimal operation.
Must be installed level with a maximum fall of 5mm to the rear
- 24 month parts and labour warranty

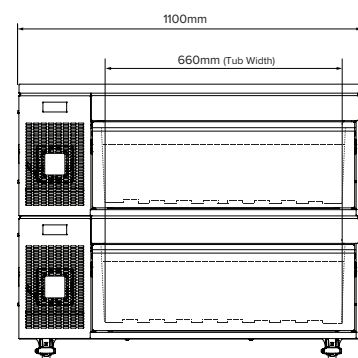


General Specifications

Capacity	172 Litres 4 x 100mm deep 1/1 GN pans or 6 x 65mm deep 1/1 GN pans	
Natural Refrigerant	R600a	
Climate Class	4	
Total Connected Load	0.76kW	
Electrical Connection	10+N+E 230VAC / 50Hz 10A plug & lead	
Energy Usage kW/24hrs	Chiller 2.38kW	Freezer 5.06 kW
Running Current	2.4A	1.4A
Heat Rejection	5.47kW	11.64kW
Db Rating	50.6 - 54.2	


Configurations

Models	Base Configuration	Top Configuration	W x D x H (mm)	Weight	Max Loading Weight (on top of unit)	Packed Dimensions (mm)	Packed Weight
VCS2.PT	Plinth Base	Cover Top	1100 x 700 x 816	150 kg	0 kg	1220 x 770 x 1031	187 kg
VCS2.RT	Rollers	Cover Top	1100 x 700 x 846	151 kg	0 kg	1220 x 770 x 1061	188 kg
VCS2.RW	Rollers	Solid Work Top	1100 x 700 x 857	160 kg	45 kg	1220 x 770 x 1072	196 kg
VCS2.RHS	Rollers	Heatshield Top	1100 x 700 x 895	170 kg	45 kg	1220 x 770 x 1110	206 kg
VCS2.CT	Standard Castor	Cover Top	1100 x 700 x 890	152 kg	0 kg	1220 x 770 x 1105	188 kg
VCS2.CW	Standard Castor	Solid Work Top	1100 x 700 x 900	160 kg	45 kg	1220 x 770 x 1115	196 kg
VCS2.CHS	Standard Castor	Heatshield Top	1100 x 700 x 938	170 kg	45 kg	1220 x 770 x 1153	207 kg

Base Options:



Top Options:



NOTE: Adande units are not designed as a dedicated servery cabinet for delicate products such as Ice-cream/Sorbet/Gelato/frozen Yoghurt and Frozen berries. For optimal energy efficiency and temperature stability the drawers should always be closed firmly and as quickly as possible during use.

***INSTALLATION NOTE:** Hard-wired, gas, live fuel and plumbed equipment **cannot** be directly installed onto the Adande unit. This equipment must be installed above the Adande unit using an independent equipment stand. Installation must be non-fixed to allow service access. Adande units when installed adjacent to a gas fired cooking equipment, should follow the clearance guidelines detailed in the equipment installation manual for that particular piece of equipment.