

Product Information

- 7" intuitive capacitive touch screen, featuring durable tempered glass
- Variable-speed recirculating air impingement system
- Idle mode for energy conservation
- Self-diagnostics for monitoring oven components and performance
- Independently-controlled top and bottom air impingement
- Integral recirculating catalytic converter for ventless operation
- All stainless steel interior construction
- 400mm (16") cook chamber opening
- 914mm (36") conveyor belt assembly with left or right feed conveyor belt direction (via software)
- Stackable design up to 3 high (requires stacking kit, sold separately)
- Includes two 150mm (6") conveyor extensions
- External air filtration
- Easy to clean mono-finger design
- Cool to touch covers and panels


- **12-month warranty (Terms and conditions apply)**

Specifications

Model	SPTC.HHC.1618.36.V
W x D x H (mm)	1222 x 805 x 432
Weight	89kg
Belt Dimensions (mm)	406 x 914
Opening (mm)	25 / 75
Total Connected Load	7.4kW (20A circuit*)
Electrical Connection	3Ø + N + E 400VAC / 50Hz IEC, 5-pin, 20A plug and lead fitted (1.8m)

*Circuit required to be determined at installation by a qualified electrician.

Shipping	Box: 914 x 1062 x 591 / 107kg Crate: 1130 x 1041 x 591 / 116kg
-----------------	---

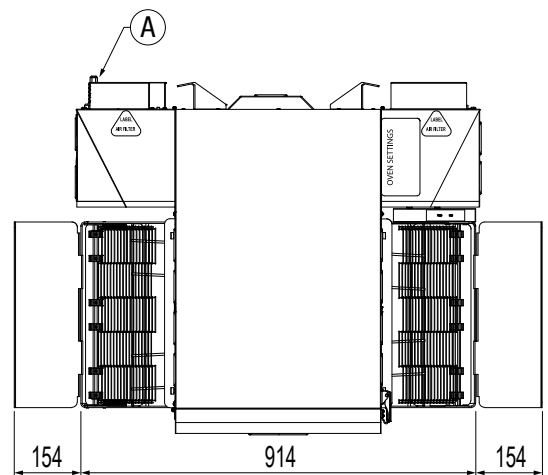

Legend

A Electrical Connection

