

Product Information

- High performance hood-type dishwasher with pre-fitted, easy to install energy savings device (ESD)
- **Electronic Smart Interface** - with LED display and multicoloured start button
- **PRS System:** break tank, 316 atmospheric boiler, rinse booster pump
- **HD System:** for maximum uninterrupted performance
- Double skin insulated hood
- Four wash cycles 90/120/180 seconds, and 9 minute deep clean
- Green standby function that reduces energy consumption when idle
- Low water consumption of 2.5 litres per cycle, minimising water, energy and detergent use
- Pressed wash tank with rounded corners, for increased hygiene
- Stainless steel wash and rinse arms
- Robust upper tank scrap filters in stainless steel
- Manual lift with fully enclosed rear, 3 spring support
- Automatic drain pump with self-cleaning function
- Vertical self-draining wash pump
- Built in thermostop, ensures correct rinse temperatures
- Built in detergent and rinse-aid injection
- This Aristarco dishwasher has been tested & complies with the requirement of current building code of Australia NCC2025-Part1, subject to conditions and limitations listed in certification document. Testing conducted independently by Australian National Testing Laboratories PTY LTD (ANTL) – Test report 5608.13.
- **24-months parts and labour warranty**

Note: The enclosure must have a minimum of 180 l/s of the air replaced by either general exhaust ventilation, supply ventilation, natural ventilation, or a combination of these. Where other heat or steam-generating appliances share the enclosure or room, the airflow must be increased to accommodate those appliances.

Note: The room requirement for multiple units may not be the "l/s air" sum of the tested individual units.



Included Accessories

- 1 x flat cup basket 500 x 500mm
- 2 x peg plate basket 500 x 500mm
- 2 x cutlery insert's
- 1 x water inlet hose, length 1.5m
- 1 x drain hose, length 2.0m
- Fitted with 150mm adjustable legs

Optional Accessories

- Twin hood system
- Remote interface
- Inlet and outlet benches
- Additional baskets

Specifications

Model	AH800ESI.ES
W x D x H (mm)	657 x 793 x 2294
<small>Note: Dimensions do not include handle. Hood open</small>	
Weight	163kg
Packed Dimensions (mm)	770 x 930 x 1870
Packed Weight	182kg
Total Connected Load	9.55kW / 415VAC, 25A circuit L1 = 12A / L 2 = 9A / L3 = 20A
- Convertible to: <small>(Low Power Option)</small>	6.75kW / 415VAC, 15A circuit L1 = 12A / L 2 = 9A / L3 = 11A

Note: Unit can be converted to low power option on site by a qualified electrician. This may affect the output of the unit.

Electrical Connection 3Ø+N+E 415VAC / 50Hz
(Lead fitted, on-site connection)

Water Quantity Per Cycle 2.5 Litres


Water Connection 1.5m Hose / 3/4" BSP

Water Inlet Pressure 100 - 500KPA

Tempered water supply 10°C - 25°C

Discharge Water Temp. Max 82°C

Waste Connection 2m Hose / ø20.5mm

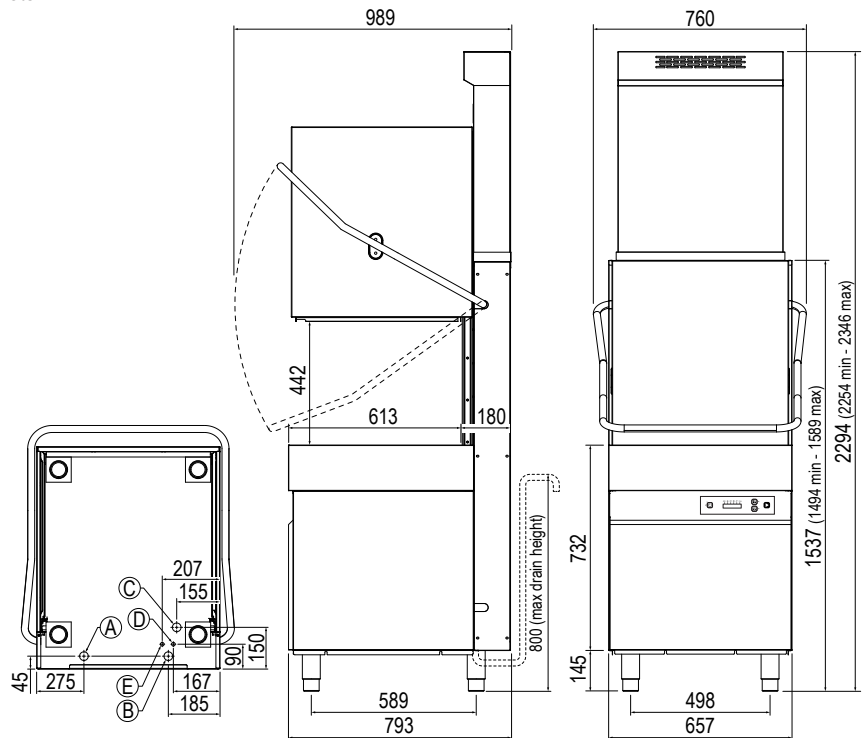

Legend

- | | |
|--------------------------------|-------------------------|
| A Electrical Connection | D Detergent Line |
| B Water Connection | E Rinse-Aid Line |
| C Drain Connection | |

Revision: A - 09/07/2026 - 04

www.stoddart.com.au

www.stoddart.co.nz



Due to continuous product research and development, the information contained herein is subject to change without notice.



STODDART