

Toilet and Basin Security Combination Unit - Round

Model: SPPL.TP.CR.www.xxx.yy.z

SPPL = Stoddart Plumbing Product
 TP = Toilet Pan
 CR = Combination, Round
 www = C90 = Pan centered 90 off wall
 = R45 = Pan offset right 45 off wall
 xxx = BSA = both sides access panel
 = RA = rear duct access
 yy = ED = electronic dual flush
 = ES = electronic single flush
 = ER = electronic, remote
 z = T = Toilet roll holder
 eg: for specification and ordering quote
 Code: SPPL.TP.CR.C90.T.RA.ED



Specifications:

Construction: 2mm thick, 304 stainless steel no.4 satin finish

Flushing: Flush valve installation should have water pressure regulated between 250kPa and 500kPa and have a flow rate between 1.2 and 1.5 L/s to the valve face

Water Connection: 25mm mains connection to flush valve.
15mm main connection to basin valve


Waste Connection: P trap standard, 95mm OD stainless steel spigot with rubber coupling included to suit 100mm PVC or copper sewer pipe. 40mm threaded basin connection to suit PVC trap.

Unit Fixing: The unit is designed to be fixed to both the floor and the rear wall. Z clip provides easy floor fixing.


Model No.	L x D x H (mm)	
SPPL.TP.CR	460 x 800 x 1050	
	Inlet Height	Outlet Height
	360	191 ± 3

Features and Benefits:


- 2mm stainless steel shroud for superior strength
- 3mm extra heavy duty spec optional
- Concealed plumbing and fixings for vandal resistance
- Toilet pan seat has an anti-contraband flushing rim for effective cell inspection
- Lead free compliant
- Seat is profiled for user comfort, improved hygiene and safety
- All external corners are rounded with a smooth radius for improved safety
- Basin has an integrated soap holder and cell-safe security drain
- Low profile, domed bubbler and wedge. Providing improved anti-ligature safety while controlling water flow for hand washing and drinking to 1.5L/min
- Electronic Piezo buttons and flow controller can easily be interfaced to water management system
- Electronic (single or dual) flush and electronic bubbler activation provides maximum security
- Optional toilet roll holder can be integrated in to tower
- Rear access option is preferred for high security prisons and detention centres




Plan View



Rear View

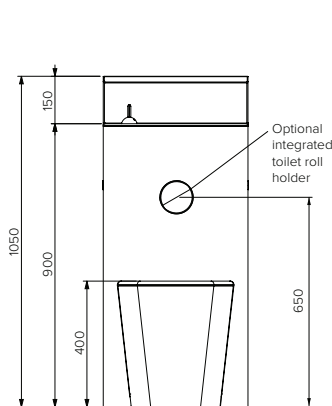

Front View

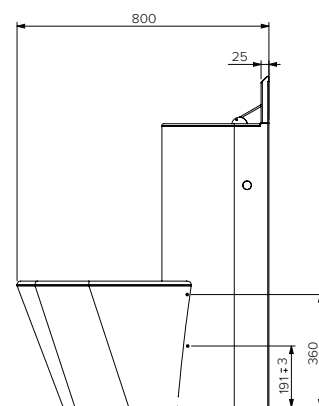

End View



Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: B - 21/09/2026 - 04

www.stoddart.com.au
 www.stoddart.co.nz